Technical sheet :






	Technical characteristics	
1.1	Manufacturer	
1.2	Model Name	
1.3	Power source	
1.4	Operator type	
1.5	Max. capacity	
1.6	Load center of gravity	
1.8	Load distance, centre of drive axle to fork	
1.9	Wheelbase	
	Weight	
2.1	Service weight	
	Wheels	
3.1	Tires type	
3.5.2	Number of drive wheels - Size of drive wheels	
3.3	Number of load wheels - Size of load wheels	
3.5	Number of front wheels / rear wheels	
3.6	Front wheel gauge	
3.7	Rear wheel gauge	
0.0	Dimensions	
4.7	Height of overhead guard (cabin)	
4.8	Seat height/stand height	
4.19	Overall length	
4.20	Length to face of forks	
4.20	Overall width	
4.22	Forks section / width / length	s
4.23	Fork carriage ISO 2328 (class/form) A/B	3
4.26	Distance between wheel arms/loading surfaces	
4.25.1	Width over forks min. / max.	
4.32	Ground clearance at centre of wheelbase	
4.33	Aisle width for 1000 x 1200 pallet lengthways	
4.34	Aisle width for 800 x 1200 pallet lengthways	
4.34	Tuming radius	
4.55	Performances	
5.1	Travel speed (laden / unladen)	
5.2	Lifting speed (laden / unladen)	
5.3	Lowering speed (laden / unladen)	
5.4.1	Reach speed (with load / without load)	
5.7	Gradeability (laden / unladen)	
5.7	Service brake	
J. TU	Service blake	
6.1	Drive motor rating S2 60 min	
6.2	-	
6.3	Lift motor rating at S3 15%	
	Battery according to DIN 43531/35/36 A, B, C	
6.4	Battery voltage / capacity	
6.5	Battery weight (+/- 5%)	
0.1	Miscellaneous	
8.1	Type of drive control	
8.3	Oil flow rate for attachments	
8.4	Sound level at the driver's ear according to DIN 12 053	

ER 16 Created on 6 May 2024 at 18:31:35 UT	ER 16	Created of	on 6 May	2024 at	18:31:35	UTC
--	-------	------------	----------	---------	----------	-----

	Metric
	MANITOU
	ER 16
	Electrical
	Seated
	1600 kg
	600 mm
	439 mm
	1448 mm
	3190 kg
	Vulkollan
	1 x 355 x 155
	2 x 282*105
	1 / 2
0	0 mm
1	1130 mm
5	2205 mm
7	1077 mm
	2379 mm
	1229 mm
	1270 mm
/1	40 mm x 100 mm / 1150 mm
	2A
1	912 mm
5	316 mm / 697 mm 70 mm
2	
	2689 mm 2728 mm
;t	1668 mm
a	1008 11111
	14.30 km/h / 14.50 km/h
	0.49 m/s / 0.80 m/s
	0.49 m/s / 0.48 m/s
	0.20 m/s / 0.20 m/s
	8.50 % / 11.10 %
	Electric
	7.20 kW
	15 kW
	DIN 43531 C
	48 V / 465 Ah
	735 kg
	Electronic
	25 l/min
	60.80 dB

ER 16 - Dimensional drawing

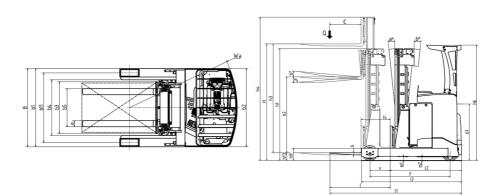

Characteristics of masts and residual capacities

Free Lift Triplex (FLT)		FLT 48	FLT 54	FLT 63	FLT 68	FLT 73	FLT 80	FLT 85	FLT 90
Mast/fork carriage tilt, forward °		3	3	3	3	3	3	3	3
Mast/fork carriage tilt, backward	۰	1	1	1	1	1	1	1	1
h1 - Mast lowered height	mm	2140	2340	2640	2790	2957	3190	3673	3823
h2 - Mast free lift	mm	1600	1800	1900	2100	2400	2650	3100	3200
h3 - Mast lifting height	mm	4800	5400	6300	6750	7250	7950	8450	8950
h4 - Mast extended height	mm	5380	5980	6880	7330	7830	8530	9080	9530
Residual capacity with integrated side shift at max heigth	kg	1600	1600	1400	1100				



Tel: +33 (0)2 40 09 10 11 - Fax: +33 (0)2 40 09 10 97 www.manitou.com



This publication provides a description of the configuration versions and options for Manitou products, which may differ for equipment. The equipment presented in this brochure may be part of a series, as an option, or it may not be available, depending on the versions. Manitou reserves the right, at any time and without notice, to amend the specifications described and represented. The specifications provided do not bind the manufacturer. For more details, please contact your Manitou agent. This is not a contractually binding document. The presentation of the products is not contractually binding. List of specifications non-exhaustive. The logos as well as the visual identity of the company are owned by Manitou and cannot be used without authorisation. All rights reserved. The photos and diagrams contained in this brochure are only provided for consultation and information purposes.

MANITOU BF SA - Limited company with board of directors - Share capital: 39,668,399 euros - 857 802 508 RCS Nantes