

Ficha técnica :


ES 720 4W



 **MANITOU**
HANDLING YOUR WORLD

| Technical characteristics | | | Métrico |
|---------------------------|-------------------------------------------------------------------------|-----------|--------------------------|
| 1.1 | Manufacturer | | MANITOU |
| 1.2 | Model Name | | ES 720 4W |
| 1.3 | Power source | | Electrical |
| 1.4 | Operator type | | Pedestrian |
| 1.5 | Max. capacity | Q | 2000 kg |
| 1.6 | Load center of gravity | c | 600 mm |
| 1.8 | Load distance, centre of drive axle to fork (low/raised) - Low position | x | 690 mm |
| 1.9 | Wheelbase | y | 1194 mm |
| Wheels | | | |
| 3.1 | Tires type | | Polyurethane |
| 3.4 | Size of castor wheels | | 125 x (2x50) |
| 3.5 | Number of front wheels / rear wheels | | 5 / 4 |
| 3.5.2 | Number of drive wheels | | 1 |
| 3.6 | Front wheel gauge | b10 | 878 mm |
| 3.7 | Rear wheel gauge | b11 | 1610 mm |
| Dimensions | | | |
| 4.15 | Fork height in low position | h13 | 50 mm |
| 4.19 | Overall length | l1 | 1775 mm |
| 4.20 | Length to face of forks | l2 | 825 mm |
| 4.21 | Overall width | b1 | 1810 mm |
| 4.22 | Forks section / width / length | s / e / l | 40 mm / 120 mm / 1150 mm |
| 4.26 | Distance between wheel arms/loading surfaces | b4 | 1450 mm |
| 4.24 | Fork carriage width | b3 | 1410 mm |
| 4.32 | Ground clearance at centre of wheelbase | m2 | 50 mm |
| 4.35 | Turning radius | Wa | 1476 mm |
| 4.9 | Height tiller min. / max. | h14 / h14 | 1030 mm / 1490 mm |
| Performances | | | |
| 5.1 | Travel speed (laden / unladen) | | 6 km/h / 6 km/h |
| 5.2 | Lifting speed (laden / unladen) | | 0.14 m/s / 0.24 m/s |
| 5.3 | Lowering speed (laden / unladen) | | 0.30 m/s / 0.20 m/s |
| 5.10 | Service brake | | Electro magnetic |
| Engine | | | |
| 6.1 | Drive motor rating S2 60 min | | 1.20 kW |
| 6.2 | Lift motor rating at S3 15% | | 3 kW |
| 6.3 | Battery according to DIN 43531/35/36 A, B, C | | DIN 43535-B |
| 6.4 | Battery voltage / capacity | | 24 V / 160 Ah |
| 6.4.1 | Battery max. capacity | | 250 A |
| 6.5 | Battery weight (+/- 5%) | | 165 kg |
| 6.5.1 | Battery max. weight | | 215 kg |
| Miscellaneous | | | |
| 8.1 | Type of drive control | | Variator |
| 8.4 | Sound level at the driver's ear according to DIN 12 053 | | 70 dB |

ES 720 4W - Diagrama dimensional

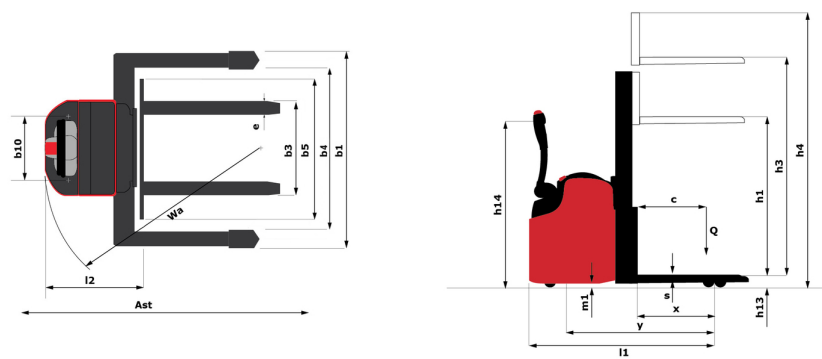

Características de los mástiles y capacidad residual

| Central Cylinder Simplex (CCS) | | CCS 15 | CCS 17 |
|---------------------------------|----|--------|--------|
| h1 - Mast lowered height | mm | 1939 | 2189 |
| h3 - Mast lifting height | mm | 1466 | 1716 |
| h4 - Mast extended height | mm | 1946 | 2196 |
| Residual capacity at max height | kg | 2000 | 2000 |
| Height at max capacity | mm | 1510 | 1760 |

| Full Visibility Duplex (FVD) | | FVD 29 | FVD 34 | FVD 38 |
|---------------------------------|----|--------|--------|--------|
| h1 - Mast lowered height | mm | 1939 | 2189 | 2389 |
| h3 - Mast lifting height | mm | 2896 | 3396 | 3796 |
| h4 - Mast extended height | mm | 3376 | 2876 | 4276 |
| Residual capacity at max height | kg | 2000 | 1800 | 1600 |
| Height at max capacity | mm | 2940 | | |

| Free Lift Duplex (FLD) | | FLD 29 | FLD 34 |
|---------------------------------|----|--------|--------|
| h1 - Mast lowered height | mm | 1939 | 2189 |
| h2 - Mast free lift | mm | 1466 | 1716 |
| h3 - Mast lifting height | mm | 2891 | 3391 |
| h4 - Mast extended height | mm | 3371 | 3871 |
| Residual capacity at max height | kg | 2000 | 1700 |
| Height at max capacity | mm | 2930 | |

| Free Lift Triplex (FLT) | | FLT 42 |
|---------------------------------|----|--------|
| h1 - Mast lowered height | mm | 1897 |
| h2 - Mast free lift | mm | 1426 |
| h3 - Mast lifting height | mm | 4206 |
| h4 - Mast extended height | mm | 4709 |
| Residual capacity at max height | kg | 1300 |



Oficina Central

B.P. 249 - 430 rue de l'Aubinière

44150 Ancenis Cedex - Francia

Tel.: 00 33 (0)2 40 09 10 11 - Fax: 00 33 (0)2 40 09 10 97

www.manitou.com



Esta publicación describe las versiones y posibilidades de configuración de los productos Manitou que puedan diferir en equipamiento. Los equipamientos presentados en este folleto pueden ser de serie, opcionales o no estar disponibles en algunas versiones. Manitou se reserva el derecho, en cualquier momento y sin previo aviso, de modificar las especificaciones descritas y representadas. Las especificaciones aportadas no comprometen al fabricante. Para más información, póngase en contacto con su concesionario Manitou. Documento no contractual. Presentación de los productos no contractual. Lista de especificaciones no exhaustiva. Los logos y la identidad visual de la empresa son propiedad de Manitou y no pueden ser utilizados sin autorización. Todos los derechos reservados. Las fotos y los esquemas contenidos en este folleto se ofrecen para consulta y a título indicativo solamente.

Manitou BF SA - Sociedad anónima con Consejo de Administración - Capital social: 39 668 399 euros - 857 802 508 RCS Nantes