Technical sheet :






	Technical characteristics	
1.1	Manufacturer	
1.2	Model Name	
1.3	Power source	
1.4	Operator type	
1.5	Max. capacity	Q
1.51	Nominal capacity on wrapover forks	Q
1.6	Load center of gravity	С
1.8	Distance from Load backrest to center of rear axle	x
1.9	Wheelbase	у
	Weight	,
2.1	Service weight	
2.2	Weight on front axle (laden) / rear axle (laden)	
2.3	Weight on front axle (Unladen) / rear axle (Unladen)	
2.5	Wheels	
3.1	Tires type	
3.3	Number of load wheels / Size of load wheels	
3.4	Number of road wheels 7 size of road wheels	
3.4	Number of castol wheels Number of stabilizer wheels / Size of the stabilizer wheels	
3.4	Number of stabilizer wheels / size of the stabilizer wheels	
3.5.2	Number of drive wheels / Size of drive wheels	L10
3.6	Front wheel gauge	b10
3.7	Rear wheel gauge	b11
4.6	Dimensions Initial lift	h5
		h13
4.15	Fork height in low position	11
4.19 4.20	Overall length	11
	Length to face of forks	12 b1
4.21	Overall width	
4.22	Forks section / width / length	s / e / l b3
4.24	Fork carriage width	
4.31	Ground clearance below mast	m1
4.32	Ground clearance at centre of wheelbase	m2
4.33	Aisle Width for pallets 1000 x 1200 crossways	Ast
4.34	Aisle width for 800 x 1200 pallet lengthways	Ast
4.35	Turning radius	Wa
4.9	Height tiller min. / max.	h14 / h14
	Performances	
5.1	Travel speed (laden / unladen)	
5.2	Lifting speed (laden / unladen)	
5.3	Lowering speed (laden / unladen)	
5.8	Max Gradeability (laden / unladen)	
5.10	Service brake	
	Engine	
6.1	Drive motor rating S2 60 min	
6.2	Lift motor rating at S3 15%	
6.3	Battery according to DIN 43531/35/36 A, B, C	
6.4	Battery voltage / capacity	
6.5	Battery weight (+/- 5%)	
	Miscellaneous	
8.1	Type of drive control	
8.4	Sound level at the driver's ear according to DIN 12 053	

ES 820 L	Created on August 18, 2025 at 6:14 PM UTC
	Metric
	Manitou
	ES 820 LI
	Electrical
	Pedestrian
Q	2000 kg
Q	2000 kg
С	600 mm
Х	716 mm
у	1509 mm
	1800 kg
	1360 kg / 2500 kg
	1250 kg / 550 kg
	Polyurethane
	4 / 82 x 68
	1
	2 / 120 x 50
	3 / 4
	1/254x100
b10	664 mm
b11	375 mm
h5	110 mm
h13	86 mm
1 2	2123 mm
	973 mm
b1 s / e / l	890 mm 70 mm / 200 mm / 1150 mm
b3	70 mm / 200 mm / 1150 mm
D3 m1	20 mm
m2	20 mm
Ast	2572 mm
Ast	2532 mm
Wa	1719 mm
h14 / h14	900 mm / 1400 mm
111471114	300 mm / 1400 mm
	6 km/h / 6 km/h
	0.11 m/s / 0.20 m/s
	0.21 m/s / 0.22 m/s
	6 % / 10 %
	Electro magnetic
	2 kW
	4 kW
	Traction
	24 V / 315 Ah
	273 kg
	DC
	65 dB

ES 820 LI - Dimensional drawing

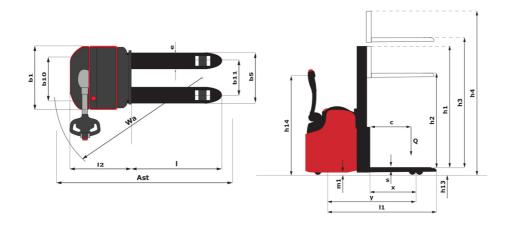

Characteristics of masts and residual capacities

Central Cylinder Simplex (CCS)		CCS 15	CCS 17
h1 - Mast lowered height	mm	1955	2205
h2 - Mast free lift	mm	1510	1760
h3 - Mast lifting height	mm	1510	1760
h4 - Mast extended height	mm	1965	2215
Residual capacity at max height	kg	2000	2000

Full Visibility Duplex (FVD)		FVD 29	FVD 34
h1 - Mast lowered height	mm	1955	2205
h3 - Mast lifting height	mm	2940	3440
h4 - Mast extended height	mm	3400	3900
Residual capacity at max height	kg	1600	1300

Free Lift Duplex (FLD)		FLD 29	FLD 34
h1 - Mast lowered height	mm	2205	2205
h2 - Mast free lift	mm	1510	1760
h3 - Mast lifting height	mm	2935	3435
h4 - Mast extended height	mm	3895	3895
Residual capacity at max height kg		1600	1300

Free Lift Triplex (FLT)		FLT 42	FLT 47	FLT 54
h1 - Mast lowered height	mm	1915	2075	2315
h2 - Mast free lift	mm	1470	1630	1880
h3 - Mast lifting height	mm	4250	4730	5460
h4 - Mast extended height	mm	4725	5205	5895
Residual capacity at max height	kg	750	550	450



Head Office B.P. 249 - 430 rue de l'Aubinière 44150 Ancenis Cedex - France Tel: +33 (0)2 40 09 10 11 - Fax: +33 (0)2 40 09 10 97 www.manitou.com



This publication provides a description of the configuration versions and options for Manitou products, which may differ for equipment. The equipment presented in this brochure may be part of a series, as an option, or it may not be available, depending on the versions. Manitou reserves the right, at any time and without notice, to amend the specifications described and represented. The specifications provided do not bind the manufacturer. For more details, please contact your Manitou agent. This is not a contractually binding document. The presentation of the products is not contractually binding. List of specifications non-exhaustive. The logos as well as the visual identity of the company are owned by Manitou and cannot be used without authorisation. All rights reserved. The photos and diagrams contained in this brochure are only provided for consultation and information purposes.

MANITOU BF SA - Limited company with board of directors - Share capital: 39,668,399 euros - 857 802 508 RCS Nantes