

Technical sheet :


# M 26-2 D ST5



 **MANITOU**  
HANDLING YOUR WORLD

Technical characteristics		Metric	
1.1	Manufacturer	MANITOU	
1.2	Model Name	M 26-2 D ST5	
1.3	Power source	Diesel	
1.4	Operator type	Seated	
1.5	Max. capacity	2600 kg	
1.6	Load center of gravity	500 mm	
1.8	Load distance, centre of drive axle to fork	747 mm	
1.9	Wheelbase	1995 mm	
Weight		FVD 37	
2.1	Standard mast reference of the machine	5590 kg	
2.2	Service weight	6940 kg / 1250 kg	
2.3	Weight on front axle (laden) / rear axle (laden)	2530 kg / 3060 kg	
Wheels		Pneumatic	
3.1	Tires type	14,5R20 18PR MPT80	
3.2	Dimensions of front wheels	10R17,5 G291 GY	
3.3	Dimensions of rear wheels		
3.5	Number of front wheels / rear wheels	2 / 2	
3.5.2	Number of drive wheels	2	
3.6	Front wheel gauge	1550 mm	
3.7	Rear wheel gauge	1644 mm	
Dimensions		2450 mm	
4.7	Overall height of low overhead guard (Buggy version)	h6*	
4.8	Seat height/stand height	h7	
4.19	Overall length	l1	
4.20	Length to face of forks	l2	
4.21	Overall width	b1	
4.22	Forks section x width x length	s / e / l	40 mm x 125 mm / 1200 mm
4.23	Fork carriage ISO 2328 (class/form) A/B	b3	3A
4.24	Fork carriage width	m1	1470 mm
4.31	Ground clearance below mast	m2	406 mm
4.32	Ground clearance at centre of wheelbase	Ast	390 mm
4.33	Aisle width for 1000 x 1200 pallet widthways	Ast	5360 mm
4.34	Aisle width for 800 x 1200 pallet lengthways	Ast	5360 mm
4.35	Turning radius	Wa	3220 mm
Performances		22 km/h / 22 km/h	
5.1	Travel speed (laden / unladen)	0.60 m/s / 0.60 m/s	
5.2	Lifting speed (laden / unladen)	0.40 m/s / 0.40 m/s	
5.3	Lowering speed (laden / unladen)	5380 daN / 2260 daN	
5.5	Drawbar pull (Laden / Unladen)	Hydraulic	
5.10	Service brake	Torque converter	
Transmission type		Deutz / TCD 2,9 / Stage V	
7.1	Engine brand / model / norm	75 Hp/55 kW	
7.2	Engine power (Hp / kW)	2300 rpm	
7.3	Rated speed	4 - 2925 cm <sup>3</sup>	
7.4	Number of cylinders / Capacity of cylinders		
Miscellaneous		185 bar	
8.2	Working hydraulic pressure for attachments	97 l/min	
8.3	Oil flow rate for attachments	78 dB	
8.4	Sound level at the driver's ear according to DIN 12 053		

## M 26-2 D ST5 - Dimensional drawing

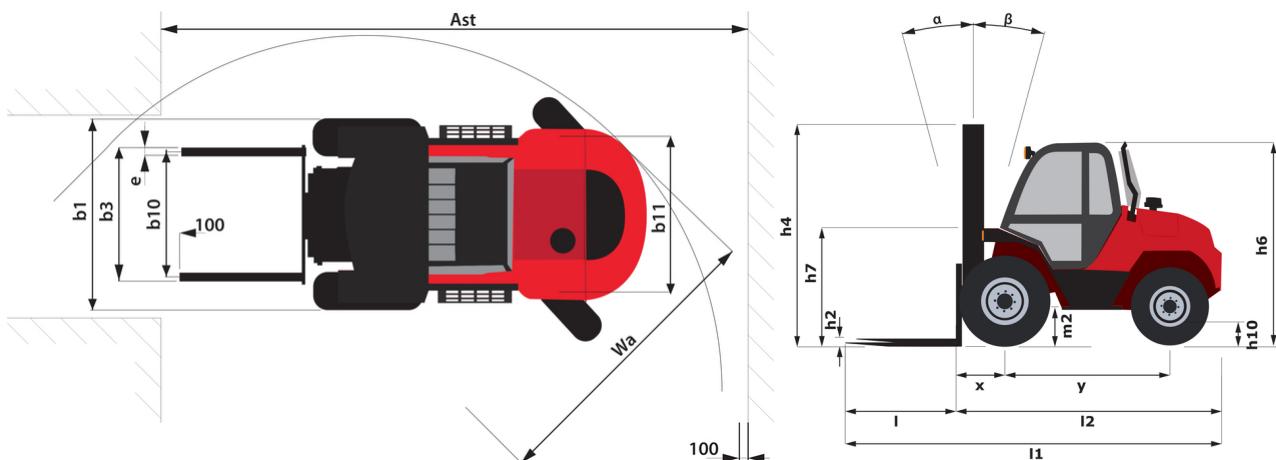

## Characteristics of masts and residual capacities

Full Visibility Duplex (FVD)	
α - Mast/fork carriage tilt, forward	°
β - Mast/fork carriage tilt, backward	°
h1 - Mast lowered height	mm
h3 - Mast lifting height	mm
h4 - Mast extended height	mm
Residual capacity at max height	kg
Residual capacity with hooked-on side shift at max height	kg
Height at max capacity	mm
Height at max capacity with hooked-on sideshift	mm

FVD 37	FVD 45
6	6
12	12
2696	3136
3700	4500
4626	5426
2600	2600
2600	2600
3700	4500
3700	4500

Free Lift Triplex (FLT)	
α - Mast/fork carriage tilt, forward	°
β - Mast/fork carriage tilt, backward	°
h1 - Mast lowered height	mm
h2 - Mast free lift	mm
h3 - Mast lifting height	mm
h4 - Mast extended height	mm
Height at max capacity	mm

FLT 43	FLT 50	FLT 65
6	6	6
12	12	12
2436	2696	3386
1580	1840	2530
4300	5000	6500
5234	5934	7434
2500	2500	2500

Full Visibility Triplex (FVT)	
α - Mast/fork carriage tilt, forward	°
β - Mast/fork carriage tilt, backward	°
h1 - Mast lowered height	mm
h3 - Mast lifting height	mm
h4 - Mast extended height	mm
Height at max capacity	mm

FVT 55
6
10
2966
5500
6564
2500



**Head Office**

B.P. 249 - 430 rue de l'Aubinière  
44150 Ancenis Cedex - France  
Tel: +33 (0)2 40 09 10 11 - Fax: +33 (0)2 40 09 10 97  
[www.manitou.com](http://www.manitou.com)



This publication provides a description of the configuration versions and options for Manitou products, which may differ for equipment. The equipment presented in this brochure may be part of a series, as an option, or it may not be available, depending on the versions. Manitou reserves the right, at any time and without notice, to amend the specifications described and represented. The specifications provided do not bind the manufacturer. For more details, please contact your Manitou agent. This is not a contractually binding document. The presentation of the products is not contractually binding. List of specifications non-exhaustive. The logos as well as the visual identity of the company are owned by Manitou and cannot be used without authorisation. All rights reserved. The photos and diagrams contained in this brochure are only provided for consultation and information purposes.

MANITOU BF SA - Limited company with board of directors - Share capital: 39,668,399 euros - 857 802 508 RCS Nantes