Technical sheet:


## MC-X 25-4





		MC-X 25-4 Cleater	u on november 1, 2025 at 11.35 PM
	Technical characteristics		Metric
1.1	Manufacturer		Manitou
1.2	Model Name		MC-X 25-4
1.3	Power source		Diesel
1.4	Operator type		Seated
	Max. capacity	Q	2500 kg
	Load center of gravity	С	500 mm
	Load distance, centre of drive axle to fork	X	621 mm
	Wheelbase	у	1900 mm
	Weight		
2.1	Service weight		4035 kg
2.2	Weight on front axle (laden) / rear axle (laden)		5550 kg / 985 kg
	Weight on front axle (Unladen) / rear axle (Unladen)		1575 kg / 2460 kg
	Wheels		,
3.1	Tires type	_	Pneumatic
	Dimensions of front wheels		12,5/80-18/12 SL R4
	Dimensions of rear wheels		27x10-12 SKS
	Number of front wheels / rear wheels		2/2
	Number of drive wheels		4
	Front wheel gauge	b10	1159 mm
	Rear wheel gauge	b10	1176 mm
	Dimensions	BIII	1170 11111
	Height of overhead guard (cabin) / Overall height of low overhead guard (Buggie version)	h6 / h6*	2155 mm / 1990 mm
	Seat height/stand height	h7	1094 mm
	Overall length	I1	4195 mm
	Length to face of forks	12	3045 mm
	Overall width	b1	1450 mm
	Forks section x width x length	s / e / l	40 mm x 122 mm / 1150 mm
	Fork carriage ISO 2328 (class/form) A/B	37 671	2A
	Fork carriage width	b3	1260 mm
	Ground clearance below mast	m1	300 mm
	Ground clearance at centre of wheelbase	m2	310 mm
		Wa	3405 m
	Turning radius	wa	3405 III
	Performances Town Lorent (Indian Control of the Con		10 laws the 104 00 laws the
	Travel speed (laden / unladen)		12 km/h / 24.90 km/h
	Lifting speed (laden / unladen)		0.47 m/s / 0.46 m/s
	Lowering speed (laden / unladen)		0.50 m/s / 0.30 m/s
	Service brake		Hydraulic brakes by loss of pressure
	Transmission type		Hydrostatic
	Engine		W. L. & W. C. & W. W.
	Engine brand / model / norm		Kubota / V2403 / Stage IIIA
	Engine power (Hp / kW)		49 Hp/36 kW
	Rated speed		2700 rpm
7.4	Number of cylinders / Capacity of cylinders		4 - 2434 cm³
	Miscellaneous		
	Type of drive control		Cable
8.2	Working hydraulic pressure for attachments		180 bar
8.3	Oil flow rate for attachments		53 I/min

## MC-X 25-4 - Dimensional drawing

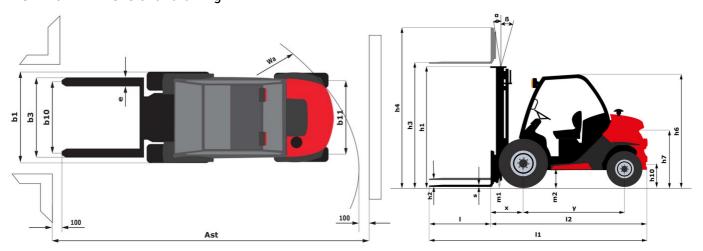

## Characteristics of masts and residual capacities

Full Visibility Duplex (FVD)		FVD 33	FVD 37	FVD 45
α - Mast/fork carriage tilt, forward	٠	10	10	10
β - Mast/fork carriage tilt, backward	٠	12	12	12
h1 - Mast lowered height	mm	2338	2598	3038
h2 - Mast free lift	mm	112	112	112
h3 - Mast lifting height	mm	3300	3700	4500
h4 - Mast extended height	mm	4090	4490	5290
Height at max capacity	mm	2500	2500	2500

Free Lift Triplex (FLT)		FLT 34	FLT 37	FLT 40	FLT 43	FLT 47	FLT 55
α - Mast/fork carriage tilt, forward	۰	10	10	10	10	10	6
β - Mast/fork carriage tilt, backward	۰	12	12	12	12	12	6
h1 - Mast lowered height	mm	1988	2088	2188	2338	2438	2788
h2 - Mast free lift	mm	1210	1310	1410	1510	1660	1920
h3 - Mast lifting height	mm	3400	3700	4000	4300	4700	5500
h4 - Mast extended height	mm	4236	4536	4836	5168	5536	6408
Height at max capacity	mm	2500	2500	2500	2500	2500	2500

Full Visibility Triplex (FVT)		FVT 33
α - Mast/fork carriage tilt, forward	•	10
β - Mast/fork carriage tilt, backward	۰	12
h1 - Mast lowered height	mm	1878
h2 - Mast free lift	mm	124
h3 - Mast lifting height	mm	3300
h4 - Mast extended height	mm	4079
Height at max capacity	mm	2500





## **Head Office**

B.P. 249 - 430 rue de l'Aubinière 44150 Ancenis Cedex - France Tel: +33 (0)2 40 09 10 11 - Fax: +33 (0)2 40 09 10 97 www.manitou.com



This publication provides a description of the configuration versions and options for Manitou products, which may differ for equipment. The equipment presented in this brochure may be part of a series, as an option, or it may not be available, depending on the versions. Manitou reserves the right, at any time and without notice, to amend the specifications described and represented. The specifications provided do not bind the manufacturer. For more details, please contact your Manitou agent. This is not a contractually binding document. The presentation of the products is not contractually binding. List of specifications non-exhaustive. The logos as well as the visual identity of the company are owned by Manitou and cannot be used without authorisation. All rights reserved. The photos and diagrams contained in this brochure are only provided for consultation and information purposes.

MANITOU BF SA - Limited company with board of directors - Share capital: 39,668,399 euros - 857 802 508 RCS Nantes