

Technical sheet :


MC 30-4 ST5



 **MANITOU**
HANDLING YOUR WORLD

Technical characteristics		Metric	
1.1	Manufacturer	Manitou	
1.2	Model Name	MC 30-4 ST5	
1.3	Power source	Diesel	
1.4	Operator type	Seated	
1.5	Max. capacity	3000 kg	
1.6	Load center of gravity	500 mm	
1.8	Load distance, centre of drive axle to fork	626 mm	
1.9	Wheelbase	1900 mm	
Weight		FVD 33	
2.1	Standard mast reference of the machine	4440 kg	
2.2	Service weight	6650 kg / 790 kg	
Wheels		Pneumatic	
3.1	Tires type	12,5/80-18/12 SL R4	
3.2	Dimensions of front wheels	27x10-12 SKS	
3.3	Dimensions of rear wheels	2 / 2	
3.5	Number of front wheels / rear wheels	4	
3.5.2	Number of drive wheels		
3.6	Front wheel gauge	1159 mm	
3.7	Rear wheel gauge	1176 mm	
Dimensions		2155 mm / 1990 mm	
4.7	Height of overhead guard (cabin) / Overall height of low overhead guard (Buggy version)	h6 / h6*	
4.8	Seat height/stand height	h7	
4.19	Overall length	l1	
4.20	Length to face of forks	l2	
4.21	Overall width	b1	
4.22	Forks section x width x length	s / e / l	
4.23	Fork carriage ISO 2328 (class/form) A/B	3A	
4.31	Ground clearance below mast	m1	
4.32	Ground clearance at centre of wheelbase	m2	
4.33	Aisle width for 1000 x 1200 pallet widthways	Ast	
4.35	Turning radius	Wa	
Performances		12 km/h / 24.50 km/h	
5.1	Travel speed (laden / unladen)	0.47 m/s / 0.46 m/s	
5.2	Lifting speed (laden / unladen)	0.50 m/s / 0.30 m/s	
5.3	Lowering speed (laden / unladen)	3100 daN	
5.5	Drawbar pull (Laden)	46 %	
5.7	Gradeability (laden)	Hydraulic brakes by loss of pressure	
5.10	Service brake	Hydrostatic	
Transmission type		Kubota / D1803 CRT E5B / Stage V	
Engine		50 Hp/37 kW	
7.1	Engine brand / model / norm	2700 rpm	
7.2	Engine power (Hp / kW)	3 - 1826 cm ³	
7.3	Rated speed		
7.4	Number of cylinders / Capacity of cylinders		
Miscellaneous		Electronic	
8.1	Type of drive control	42 l/min	
8.3	Oil flow rate for attachments	79 dB	
8.4	Sound level at the driver's ear according to DIN 12 053		

MC 30-4 ST5 - Dimensional drawing

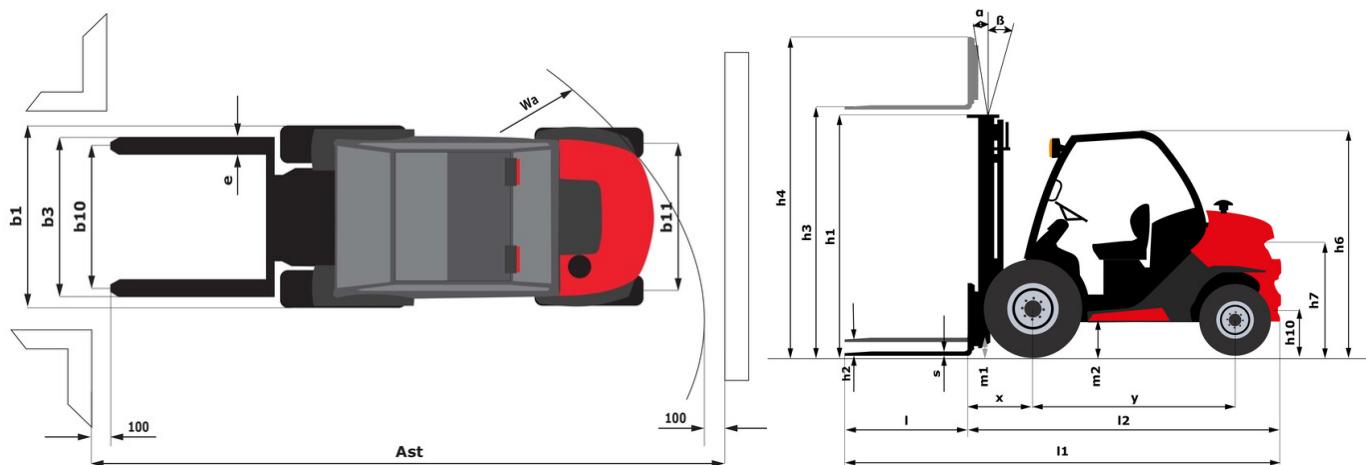

Characteristics of masts and residual capacities

Full Visibility Duplex (FVD)	
α - Mast/fork carriage tilt, forward	°
β - Mast/fork carriage tilt, backward	°
h1 - Mast lowered height	mm
h2 - Mast free lift	mm
h3 - Mast lifting height	mm
h4 - Mast extended height	mm
Residual capacity at max height	kg
Residual capacity with hooked-on side shift at max height	kg
Height at max capacity	mm
Height at max capacity with hooked-on sideshift	mm

FVD 33	FVD 37	FVD 45
12	12	12
10	10	10
2338	2598	3038
117	117	117
3300	3700	4500
4090	4490	5290
1400	1400	500
1400	1400	500
2700	2700	2800
2700	2700	2800

Free Lift Triplex (FLT)	
α - Mast/fork carriage tilt, forward	°
β - Mast/fork carriage tilt, backward	°
h1 - Mast lowered height	mm
h2 - Mast free lift	mm
h3 - Mast lifting height	mm
h4 - Mast extended height	mm
Residual capacity at max height	kg
Residual capacity with hooked-on side shift at max height	kg
Height at max capacity	mm
Height at max capacity with hooked-on sideshift	mm

FLT 34	FLT 37	FLT 40	FLT 43	FLT 47	FLT 55
12	12	12	12	12	6
10	10	10	10	10	6
1988	2088	2188	2338	2438	2788
1235	1335	1435	1585	1685	2035
3400	3700	4000	4300	4700	5500
4236	4536	4836	5136	5536	6336
1900	1500	1300	1400	430	500
1800	1400	1250		400	400
2700	2600	2700	3100	2700	2500
2700	2600	2700		2700	2500

Full Visibility Triplex (FVT)	
α - Mast/fork carriage tilt, forward	°
β - Mast/fork carriage tilt, backward	°
h1 - Mast lowered height	mm
h2 - Mast free lift	mm
h3 - Mast lifting height	mm
h4 - Mast extended height	mm
Height at max capacity	mm

FVT 33
12
10
1878
129
3300
4079
2500

Equipment

Standard
Closed cab
Differential Lock
Easy link
Ecostop
Front tires - Rough terrain profil
Inching Pedal
Mechanical suspension PVC seat - Grammer MSG65
Open cab
Oscillating rear axle
Rear tires - Rough terrain profil
Rear working light
Switch 2WD / 4WD

Optional
Audio warning on reverse
Enclosed Cab with Heat and A/C
Front and Rear - Work Lights
Joystick Switch and Move (JSM)
LED Rotative Beacon
Load backrest
Open cab
Pneumatic seat
Sideshift carriage



MANITOU HANDLING YOUR WORLD

Head Office

B.P. 249 - 430 rue de l'Aubinière

44150 Ancenis Cedex - France

Tel: +33 (0)2 40 09 10 11 - Fax: +33 (0)2 40 09 10 97

www.manitou.com



This publication provides a description of the configuration versions and options for Manitou products, which may differ for equipment. The equipment presented in this brochure may be part of a series, as an option, or it may not be available, depending on the versions. Manitou reserves the right, at any time and without notice, to amend the specifications described and represented. The specifications provided do not bind the manufacturer. For more details, please contact your Manitou agent. This is not a contractually binding document. The presentation of the products is not contractually binding. List of specifications non-exhaustive. The logos as well as the visual identity of the company are owned by Manitou and cannot be used without authorisation. All rights reserved. The photos and diagrams contained in this brochure are only provided for consultation and information purposes.

MANITOU BF SA - Limited company with board of directors - Share capital: 39,668,399 euros - 857 802 508 RCS Nantes