

Technical sheet :

# **MC 30-4 ST5**


---



 **MANITOU**  
HANDLING YOUR WORLD

| Technical characteristics |  | Metric    |                                      |
|---------------------------|--|-----------|--------------------------------------|
| 1.1                       | Manufacturer   |           | Manitou                              |
| 1.2                       | Model Name   |           | MC 30-4 ST5                          |
| 1.3                       | Power source   |           | Diesel                               |
| 1.4                       | Operator type  |           | Seated                               |
| 1.5                       | Max. capacity  | Q         | 3000 kg                              |
| 1.6                       | Load center of gravity   | c         | 500 mm                               |
| 1.8                       | Load distance, centre of drive axle to fork  | x         | 626 mm                               |
| 1.9                       | Wheelbase  | y         | 1900 mm                              |
| Weight                    |  |           |                                      |
|                           | Standard mast reference of the machine   |           | FVD 33                               |
| 2.1                       | Service weight   |           | 4440 kg                              |
| 2.2                       | Weight on front axle (laden) / rear axle (laden)   |           | 6650 kg / 790 kg                     |
| Wheels                    |  |           |                                      |
| 3.1                       | Tires type   |           | Pneumatic                            |
| 3.2                       | Dimensions of front wheels   |           | 12,5/80-18/12 SL R4                  |
| 3.3                       | Dimensions of rear wheels  |           | 27x10-12 SKS                         |
| 3.5                       | Number of front wheels / rear wheels   |           | 2 / 2                                |
| 3.5.2                     | Number of drive wheels   |           | 4                                    |
| 3.6                       | Front wheel gauge  | b10       | 1159 mm                              |
| 3.7                       | Rear wheel gauge   | b11       | 1176 mm                              |
| Dimensions                |  |           |                                      |
| 4.7                       | Height of overhead guard (cabin) / Overall height of low overhead guard (Buggie version) | h6 / h6*  | 2155 mm / 1990 mm                    |
| 4.8                       | Seat height/stand height   | h7        | 1094 mm                              |
| 4.19                      | Overall length   | l1        | 4235 mm                              |
| 4.20                      | Length to face of forks  | l2        | 3085 mm                              |
| 4.21                      | Overall width  | b1        | 1450 mm                              |
| 4.22                      | Forks section x width x length   | s / e / l | 45 mm x 100 mm / 1200 mm             |
| 4.23                      | Fork carriage ISO 2328 (class/form) A/B  |           | 3A                                   |
| 4.31                      | Ground clearance below mast  | m1        | 300 mm                               |
| 4.32                      | Ground clearance at centre of wheelbase  | m2        | 310 mm                               |
| 4.33                      | Aisle width for 1000 x 1200 pallet widthways   | Ast       | 5461 mm                              |
| 4.35                      | Turning radius   | Wa        | 3435 mm                              |
| Performances              |  |           |                                      |
| 5.1                       | Travel speed (laden / unladen)   |           | 12 km/h / 24.50 km/h                 |
| 5.2                       | Lifting speed (laden / unladen)  |           | 0.47 m/s / 0.46 m/s                  |
| 5.3                       | Lowering speed (laden / unladen)   |           | 0.50 m/s / 0.30 m/s                  |
| 5.5                       | Drawbar pull (Laden)   |           | 3100 daN                             |
| 5.7                       | Gradeability (laden)   |           | 46 %                                 |
| 5.10                      | Service brake  |           | Hydraulic brakes by loss of pressure |
|                           | Transmission type  |           | Hydrostatic                          |
| Engine                    |  |           |                                      |
| 7.1                       | Engine brand / model / nom   |           | Kubota / D1803 CRT E5B / Stage V     |
| 7.2                       | I.C. Engine power rating   |           | 37 kW                                |
| 7.3                       | Rated speed  |           | 2700 rpm                             |
| 7.4                       | Number of cylinders / Capacity of cylinders  |           | 3 - 1826 cm³                         |
| Miscellaneous             |  |           |                                      |
| 8.1                       | Type of drive control  |           | Electronic                           |
| 8.3                       | Oil flow rate for attachments  |           | 42 l/min                             |
| 8.4                       | Sound level at the driver's ear according to DIN 12 053                                  |           | 79 dB                                |

MC 30-4 ST5 - Dimensional drawing

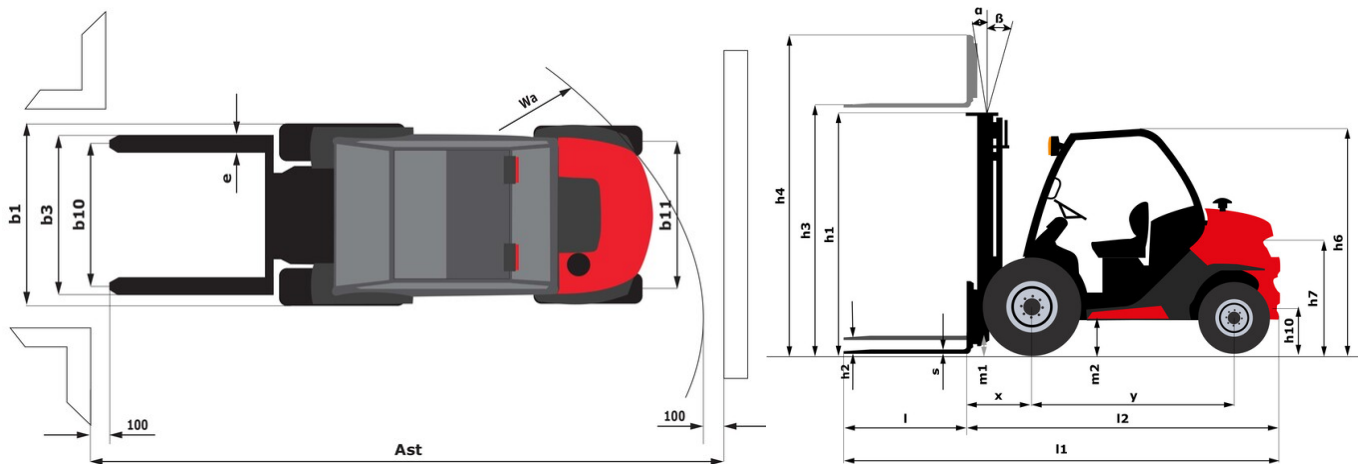

## Characteristics of masts and residual capacities

| Full Visibility Duplex (FVD)                              | FVD 33 | FVD 37 | FVD 45 |
|---|--------|--------|--------|
| α - Mast/fork carriage tilt, forward                      | 12     | 12     | 12     |
| β - Mast/fork carriage tilt, backward                     | 10     | 10     | 10     |
| h1 - Mast lowered height                                  | 2338   | 2598   | 3038   |
| h2 - Mast free lift                                       | 117    | 117    | 117    |
| h3 - Mast lifting height                                  | 3300   | 3700   | 4500   |
| h4 - Mast extended height                                 | 4090   | 4490   | 5290   |
| Residual capacity at max height                           | 1400   | 1400   | 500    |
| Residual capacity with hooked-on side shift at max height | 1400   | 1400   | 500    |
| Height at max capacity                                    | 2700   | 2700   | 2800   |
| Height at max capacity with hooked-on sideshift           | 2700   | 2700   | 2800   |

| Free Lift Triplex (FLT)                                   | FLT 34 | FLT 37 | FLT 40 | FLT 43 | FLT 47 | FLT 55 |
|---|--------|--------|--------|--------|--------|--------|
| α - Mast/fork carriage tilt, forward                      | 12     | 12     | 12     | 12     | 12     | 6      |
| β - Mast/fork carriage tilt, backward                     | 10     | 10     | 10     | 10     | 10     | 6      |
| h1 - Mast lowered height                                  | 1988   | 2088   | 2188   | 2338   | 2438   | 2788   |
| h2 - Mast free lift                                       | 1235   | 1335   | 1435   | 1585   | 1685   | 2035   |
| h3 - Mast lifting height                                  | 3400   | 3700   | 4000   | 4300   | 4700   | 5500   |
| h4 - Mast extended height                                 | 4236   | 4536   | 4836   | 5136   | 5536   | 6336   |
| Residual capacity at max height                           | 1900   | 1500   | 1300   | 1400   | 430    | 500    |
| Residual capacity with hooked-on side shift at max height | 1800   | 1400   | 1250   |        | 400    | 400    |
| Height at max capacity                                    | 2700   | 2600   | 2700   | 3100   | 2700   | 2500   |
| Height at max capacity with hooked-on sideshift           | 2700   | 2600   | 2700   |        | 2700   | 2500   |

| Full Visibility Triplex (FVT)         | FVT 33 |
|---------------------------------------|--------|
| α - Mast/fork carriage tilt, forward  | 12     |
| β - Mast/fork carriage tilt, backward | 10     |
| h1 - Mast lowered height              | 1878   |
| h2 - Mast free lift                   | 129    |
| h3 - Mast lifting height              | 3300   |
| h4 - Mast extended height             | 4079   |
| Height at max capacity                | 2500   |

## Equipment

| Standard                           |
|------------------------------------|
| Closed cab                         |
| Differential Lock                  |
| Easy link                          |
| Ecostop                            |
| Front tires - Rough terrain profil |
| Inching Pedal                      |
| Open cab                           |
| Oscillating rear axle              |
| PVC mechanical suspension seat     |
| Rear tires - Rough terrain profil  |
| Rear working light                 |
| Switch 2WD / 4WD                   |

| Optional                           |
|------------------------------------|
| Audio warning on reverse           |
| Enclosed Cab with Heat and A/C     |
| Front and Rear - Work Lights       |
| Hydraulic kit 3rd and 4th elements |
| Joystick Switch and Move (JSM)     |
| LED Rotative Beacon                |
| Load backrest                      |
| Open cab                           |
| Pneumatic seat                     |
| Sideshift carriage                 |



**Head Office**

B.P. 249 - 430 rue de l'Aubinière

44150 Ancenis Cedex - France

Tel: +33 (0)2 40 09 10 11 - Fax: +33 (0)2 40 09 10 97

[www.manitou.com](http://www.manitou.com)



This publication provides a description of the configuration versions and options for Manitou products, which may differ for equipment. The equipment presented in this brochure may be part of a series, as an option, or it may not be available, depending on the versions. Manitou reserves the right, at any time and without notice, to amend the specifications described and represented. The specifications provided do not bind the manufacturer. For more details, please contact your Manitou agent. This is not a contractually binding document. The presentation of the products is not contractually binding. List of specifications non-exhaustive. The logos as well as the visual identity of the company are owned by Manitou and cannot be used without authorisation. All rights reserved. The photos and diagrams contained in this brochure are only provided for consultation and information purposes.

MANITOU BF SA - Limited company with board of directors - Share capital: 39,668,399 euros - 857 802 508 RCS Nantes