

Technical sheet :


MC 30-4 ST5



 **MANITOU**
HANDLING YOUR WORLD

| Technical characteristics | | Metric | |
|---------------------------|---|--------------------------------------|---------|
| 1.1 | Manufacturer | Manitou | |
| 1.2 | Model Name | MC 30-4 ST5 | |
| 1.3 | Power source | Diesel | |
| 1.4 | Operator type | Seated | |
| 1.5 | Max. capacity | 3000 kg | |
| 1.6 | Load center of gravity | 500 mm | |
| 1.8 | Load distance, centre of drive axle to fork | 626 mm | |
| 1.9 | Wheelbase | 1900 mm | |
| Weight | | FVD 33 | |
| 2.1 | Standard mast reference of the machine | 4440 kg | |
| 2.2 | Service weight | 6650 kg / 790 kg | |
| Wheels | | Pneumatic | |
| 3.1 | Tires type | 12,5/80-18/12 SL R4 | |
| 3.2 | Dimensions of front wheels | 27x10-12 SKS | |
| 3.3 | Dimensions of rear wheels | 2 / 2 | |
| 3.5 | Number of front wheels / rear wheels | 4 | |
| 3.5.2 | Number of drive wheels | 1159 mm | |
| 3.6 | Front wheel gauge | 1176 mm | |
| 3.7 | Rear wheel gauge | 2155 mm / 1990 mm | |
| Dimensions | | h6 / h6* | 1094 mm |
| 4.7 | Height of overhead guard (cabin) / Overall height of low overhead guard (Buggy version) | 4235 mm | |
| 4.8 | Seat height/stand height | 3085 mm | |
| 4.19 | Overall length | 1450 mm | |
| 4.20 | Length to face of forks | 45 mm x 100 mm / 1200 mm | |
| 4.21 | Overall width | 3A | |
| 4.22 | Forks section x width x length | 300 mm | |
| 4.23 | Fork carriage ISO 2328 (class/form) A/B | 310 mm | |
| 4.31 | Ground clearance below mast | 5461 mm | |
| 4.32 | Ground clearance at centre of wheelbase | 3435 mm | |
| 4.33 | Aisle width for 1000 x 1200 pallet widthways | 12 km/h / 24.50 km/h | |
| 4.35 | Turning radius | 0.47 m/s / 0.46 m/s | |
| Performances | | 0.50 m/s / 0.30 m/s | |
| 5.1 | Travel speed (laden / unladen) | 3100 daN | |
| 5.2 | Lifting speed (laden / unladen) | 46 % | |
| 5.3 | Lowering speed (laden / unladen) | Hydraulic brakes by loss of pressure | |
| 5.5 | Drawbar pull (Laden) | Hydrostatic | |
| 5.7 | Gradeability (laden) | Kubota / D1803 CRT E5B / Stage V | |
| 5.10 | Service brake | 50 Hp/37 kW | |
| Transmission type | | 2700 rpm | |
| Engine | | 3 - 1826 cm ³ | |
| 7.1 | Engine brand / model / norm | Electronic | |
| 7.2 | Engine power (Hp / kW) | 42 l/min | |
| 7.3 | Rated speed | 79 dB | |
| 7.4 | Number of cylinders / Capacity of cylinders | | |
| Miscellaneous | | | |
| 8.1 | Type of drive control | | |
| 8.3 | Oil flow rate for attachments | | |
| 8.4 | Sound level at the driver's ear according to DIN 12 053 | | |

MC 30-4 ST5 - Dimensional drawing

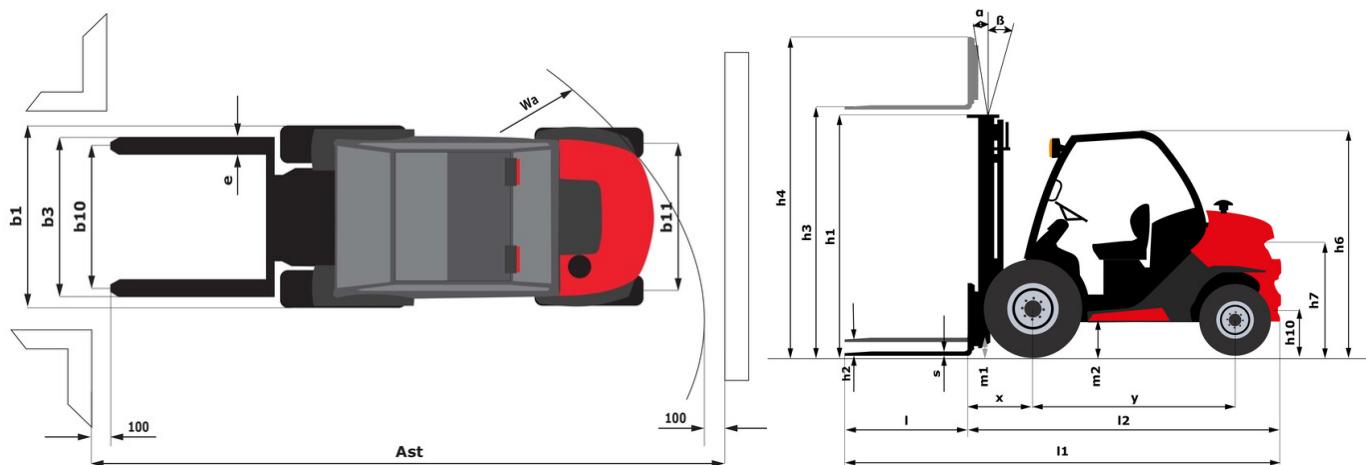

Characteristics of masts and residual capacities

| Full Visibility Duplex (FVD) | |
|---|----|
| α - Mast/fork carriage tilt, forward | ° |
| β - Mast/fork carriage tilt, backward | ° |
| h1 - Mast lowered height | mm |
| h2 - Mast free lift | mm |
| h3 - Mast lifting height | mm |
| h4 - Mast extended height | mm |
| Residual capacity at max height | kg |
| Residual capacity with hooked-on side shift at max height | kg |
| Height at max capacity | mm |
| Height at max capacity with hooked-on sideshift | mm |

| FVD 33 | FVD 37 | FVD 45 |
|--------|--------|--------|
| 12 | 12 | 12 |
| 10 | 10 | 10 |
| 2338 | 2598 | 3038 |
| 117 | 117 | 117 |
| 3300 | 3700 | 4500 |
| 4090 | 4490 | 5290 |
| 1400 | 1400 | 500 |
| 1400 | 1400 | 500 |
| 2700 | 2700 | 2800 |
| 2700 | 2700 | 2800 |

| Free Lift Triplex (FLT) | |
|---|----|
| α - Mast/fork carriage tilt, forward | ° |
| β - Mast/fork carriage tilt, backward | ° |
| h1 - Mast lowered height | mm |
| h2 - Mast free lift | mm |
| h3 - Mast lifting height | mm |
| h4 - Mast extended height | mm |
| Residual capacity at max height | kg |
| Residual capacity with hooked-on side shift at max height | kg |
| Height at max capacity | mm |
| Height at max capacity with hooked-on sideshift | mm |

| FLT 34 | FLT 37 | FLT 40 | FLT 43 | FLT 47 | FLT 55 |
|--------|--------|--------|--------|--------|--------|
| 12 | 12 | 12 | 12 | 12 | 6 |
| 10 | 10 | 10 | 10 | 10 | 6 |
| 1988 | 2088 | 2188 | 2338 | 2438 | 2788 |
| 1235 | 1335 | 1435 | 1585 | 1685 | 2035 |
| 3400 | 3700 | 4000 | 4300 | 4700 | 5500 |
| 4236 | 4536 | 4836 | 5136 | 5536 | 6336 |
| 1900 | 1500 | 1300 | 1400 | 430 | 500 |
| 1800 | 1400 | 1250 | | 400 | 400 |
| 2700 | 2600 | 2700 | 3100 | 2700 | 2500 |
| 2700 | 2600 | 2700 | | 2700 | 2500 |

| Full Visibility Triplex (FVT) | |
|---------------------------------------|----|
| α - Mast/fork carriage tilt, forward | ° |
| β - Mast/fork carriage tilt, backward | ° |
| h1 - Mast lowered height | mm |
| h2 - Mast free lift | mm |
| h3 - Mast lifting height | mm |
| h4 - Mast extended height | mm |
| Height at max capacity | mm |

| FVT 33 |
|--------|
| 12 |
| 10 |
| 1878 |
| 129 |
| 3300 |
| 4079 |
| 2500 |

Equipment

| Standard |
|--|
| Closed cab |
| Differential Lock |
| Easy link |
| Ecostop |
| Front tires - Rough terrain profil |
| Inching Pedal |
| Mechanical suspension PVC seat - Grammer MSG65 |
| Open cab |
| Oscillating rear axle |
| Rear tires - Rough terrain profil |
| Rear working light |
| Switch 2WD / 4WD |

| Optional |
|--------------------------------|
| Audio warning on reverse |
| Enclosed Cab with Heat and A/C |
| Front and Rear - Work Lights |
| Joystick Switch and Move (JSM) |
| LED Rotative Beacon |
| Load backrest |
| Open cab |
| Pneumatic seat |
| Sideshift carriage |



MANITOU HANDLING YOUR WORLD

Head Office

B.P. 249 - 430 rue de l'Aubinière

44150 Ancenis Cedex - France

Tel: +33 (0)2 40 09 10 11 - Fax: +33 (0)2 40 09 10 97

www.manitou.com



This publication provides a description of the configuration versions and options for Manitou products, which may differ for equipment. The equipment presented in this brochure may be part of a series, as an option, or it may not be available, depending on the versions. Manitou reserves the right, at any time and without notice, to amend the specifications described and represented. The specifications provided do not bind the manufacturer. For more details, please contact your Manitou agent. This is not a contractually binding document. The presentation of the products is not contractually binding. List of specifications non-exhaustive. The logos as well as the visual identity of the company are owned by Manitou and cannot be used without authorisation. All rights reserved. The photos and diagrams contained in this brochure are only provided for consultation and information purposes.

MANITOU BF SA - Limited company with board of directors - Share capital: 39,668,399 euros - 857 802 508 RCS Nantes