Technical sheet:


MC 30-4 ST5





		MC 30-4 ST5 Cleate	ed on November 4, 2025 at 9.53 PW t
1	Fechnical characteristics		Metric
1.1 N	Manufacturer		Manitou
1.2 N	Model Name		MC 30-4 ST5
1.3 F	Power source		Diesel
1.4	Operator type		Seated
	Max. capacity	Q	3000 kg
	oad center of gravity	c	500 mm
	oad distance, centre of drive axle to fork	X	626 mm
	Wheelbase	٧	1900 mm
	Weight		
	Standard mast reference of the machine		FVD 33
	Service weight		4440 kg
	Weight on front axle (laden) / rear axle (laden)		6650 kg / 790 kg
	Wheels		cook kg / / zo kg
	Fires type		Pneumatic
	Dimensions of front wheels		12,5/80-18/12 SL R4
	Dimensions of rear wheels		27x10-12 SKS
	Number of front wheels / rear wheels		2 / 2
	Number of drive wheels		4
	Front wheel gauge	b10	1159 mm
	Rear wheel gauge	b11	1176 mm
	Dimensions	BII	1170 111111
		hc /hc+	2155 mm / 1990 mm
	Height of overhead guard (cabin) / Overall height of low overhead guard (Buggie version)	h6 / h6*	
	Seat height/stand height	h7	1094 mm
	Overall length	l1	4235 mm
	ength to face of forks	12	3085 mm
	Overall width	b1	1450 mm
	Forks section x width x length	s / e / l	45 mm x 100 mm / 1200 mm
	Fork carriage ISO 2328 (class/form) A/B		3A
	Ground clearance below mast	m1	300 mm
	Ground clearance at centre of wheelbase	m2	310 mm
	Aisle width for 1000 x 1200 pallet widthways	Ast	5461 mm
	Furning radius	Wa	3435 mm
	Performances		
	Travel speed (laden / unladen)		12 km/h / 24.50 km/h
	ifting speed (laden / unladen)		0.47 m/s / 0.46 m/s
	owering speed (laden / unladen)		0.50 m/s / 0.30 m/s
	Orawbar pull (Laden)		3100 daN
5.7	Gradeability (laden)		46 %
	Service brake		Hydraulic brakes by loss of pressure
1	Fransmission type		Hydrostatic
	Engine		
	Engine brand / model / norm		Kubota / D1803 CRT E5B / Stage V
	Engine power (Hp / kW)		50 Hp/37 kW
7.3 F	Rated speed		2700 rpm
7.4	Number of cylinders / Capacity of cylinders		3 - 1826 cm³
	Miscellaneous		
8.1	Type of drive control		Electronic
8.3	Dil flow rate for attachments		42 l/min
8.4	Sound level at the driver's ear according to DIN 12 053		79 dB

MC 30-4 ST5 - Dimensional drawing

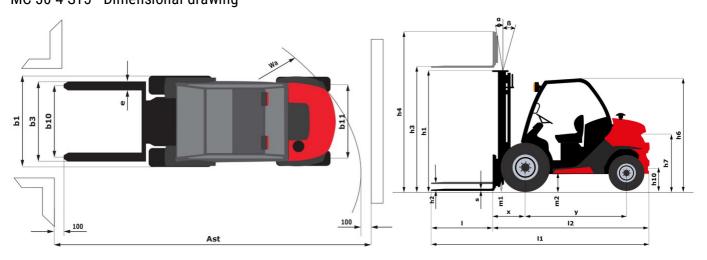

Characteristics of masts and residual capacities

Full Visibility Duplex (FVD)	
α - Mast/fork carriage tilt, forward	۰
β - Mast/fork carriage tilt, backward	۰
h1 - Mast lowered height	mm
h2 - Mast free lift	mm
h3 - Mast lifting height	mm
h4 - Mast extended height	mm
Residual capacity at max height	kg
Residual capacity with hooked-on side shift at max heigth	kg
Height at max capacity	mm
Height at max capacity with hooked-on sideshift	mm

FVD 37	FVD 45
12	12
10	10
2598	3038
117	117
3700	4500
4490	5290
1400	500
1400	500
2700	2800
2700	2800
	12 10 2598 117 3700 4490 1400

Free Lift Triplex (FLT)		FLT 34	FLT 37	FLT 40	FLT 43	FLT 47	FLT 55
α - Mast/fork carriage tilt, forward	۰	12	12	12	12	12	6
β - Mast/fork carriage tilt, backward	٠	10	10	10	10	10	6
h1 - Mast lowered height	mm	1988	2088	2188	2338	2438	2788
h2 - Mast free lift	mm	1235	1335	1435	1585	1685	2035
h3 - Mast lifting height	mm	3400	3700	4000	4300	4700	5500
h4 - Mast extended height	mm	4236	4536	4836	5136	5536	6336
Residual capacity at max height	kg	1900	1500	1300	1400	430	500
Residual capacity with hooked-on side shift at max heigth	kg	1800	1400	1250		400	400
Height at max capacity	mm	2700	2600	2700	3100	2700	2500
Height at max capacity with hooked-on sideshift	mm	2700	2600	2700		2700	2500

Full Visibility Triplex (FVT)		FVT 33
α - Mast/fork carriage tilt, forward	•	12
β - Mast/fork carriage tilt, backward	۰	10
h1 - Mast lowered height	mm	1878
h2 - Mast free lift	mm	129
h3 - Mast lifting height	mm	3300
h4 - Mast extended height	mm	4079
Height at max capacity	mm	2500

Equipment

Standard	
Closed cab	
Differential Lock	
Easy link	
Ecostop	
Front tires - Rough terrain profil	
Inching Pedal	
Mechanical suspension PVC seat - Grammer MSG65	
Open cab	
Oscillating rear axle	
Rear tires - Rough terrain profil	
Rear working light	
Switch 2WD / 4WD	

Optional		
Audio warning on reverse		
Enclosed Cab with Heat and A/C		
Front and Rear - Work Lights		
Joystick Switch and Move (JSM)		
LED Rotative Beacon		
Load backrest		
Open cab		
Pneumatic seat		
Sideshift carriage		





Head Office

B.P. 249 - 430 rue de l'Aubinière 44150 Ancenis Cedex - France Tel: +33 (0)2 40 09 10 11 - Fax: +33 (0)2 40 09 10 97 www.manitou.com



This publication provides a description of the configuration versions and options for Manitou products, which may differ for equipment. The equipment presented in this brochure may be part of a series, as an option, or it may not be available, depending on the versions. Manitou reserves the right, at any time and without notice, to amend the specifications described and represented. The specifications provided do not bind the manufacturer. For more details, please contact your Manitou agent. This is not a contractually binding document. The presentation of the products is not contractually binding. List of specifications non-exhaustive. The logos as well as the visual identity of the company are owned by Manitou and cannot be used without authorisation. All rights reserved. The photos and diagrams contained in this brochure are only provided for consultation and information purposes.

MANITOU BF SA - Limited company with board of directors - Share capital: 39,668,399 euros - 857 802 508 RCS Nantes