

Ficha técnica :

# **MHT-X 10160 ST3A**


---



 **MANITOU**  
HANDLING YOUR WORLD


| Capacities                                  |           | Métrico                                                |
|---------------------------------------------|-----------|--------------------------------------------------------|
| Max. capacity                               |           | 16000 kg                                               |
| Load center of gravity                      | c         | 600 mm                                                 |
| Max. lifting height                         |           | 9.60 m                                                 |
| Max. outreach                               |           | 5.20 m                                                 |
| Weight and dimensions                       |           |                                                        |
| Overall length                              | l1        | 7.35 m                                                 |
| Unladen weight (with forks)                 |           | 21500 kg                                               |
| Ground clearance                            | m4        | 0.43 m                                                 |
| Wheelbase                                   | y         | 3.37 m                                                 |
| Length to face of forks                     | l2        | 6.15 m                                                 |
| Overall width                               | b1        | 2.48 m                                                 |
| Overall height                              | h17       | 2.99 m                                                 |
| Overall cab width                           | b4        | 0.95 m                                                 |
| Tilt-down angle                             | a5        | 104 °                                                  |
| Tilt-up angle                               | a4        | 12 °                                                   |
| External turning radius (over tyres)        | Wa1       | 5.20 m                                                 |
| Forks length / width / section              | l / e / s | 1200 mm x 180 mm / 75 mm                               |
| Frame leveling corrector                    | a9        | 9 °                                                    |
| Wheels                                      |           |                                                        |
| Standard tires                              |           | 17,5-R25                                               |
| Number of front wheels / rear wheels        |           | 2 / 2                                                  |
| Drive wheels (front / rear)                 |           | 2 / 2                                                  |
| Steering mode                               |           | 2 wheel steer, 4 wheel steer, Crab mode                |
| Engine                                      |           |                                                        |
| Engine brand                                |           | Yanmar                                                 |
| Engine norm                                 |           | Stage IIIA                                             |
| Engine model                                |           | 4TN107TF6SMU1                                          |
| Number of cylinders / Capacity of cylinders |           | 4 - 4567 cm³                                           |
| I.C. Engine power rating / Power            |           | 173 Hp / 127 kW                                        |
| Max. torque / Engine rotation               |           | 805 Nm@1500 rpm                                        |
| Engine cooling system                       |           | Water                                                  |
| Number of batteries                         |           | 2                                                      |
| Battery voltage                             |           | 12 V                                                   |
| Drawbar pull                                |           | 11770 daN                                              |
| Transmission                                |           |                                                        |
| Transmission type                           |           | Hydrostatic                                            |
| Number of gears (forward / reverse)         |           | 2 / 2                                                  |
| Max. travel speed                           |           | 25 km/h                                                |
| Parking brake                               |           | Automatic negative parking brake                       |
| Service brake                               |           | Oil-immersed multi-discs braking on front & rear axles |
| Gradeability (laden / unladen)              |           | 32.40 % / 55.40 %                                      |
| Hydraulics                                  |           |                                                        |
| Hydraulic pump type                         |           | Variable displacement pump                             |
| Hydraulic flow - Pressure                   |           | 185 l/min - 350 bar                                    |
| Tank capacities                             |           |                                                        |
| Engine oil                                  |           | 13 l                                                   |
| Hydraulic oil                               |           | 290 l                                                  |
| Fuel tank                                   |           | 315 l                                                  |
| Noise and vibration                         |           |                                                        |
| Noise at driving position (LpA)             |           | 75 dB                                                  |
| Noise to environment (LWA)                  |           | 108 dB                                                 |
| Vibration on hands/arms                     |           | < 2.50 m/s²                                            |
| Miscellaneous                               |           |                                                        |
| Safety cab homologation                     |           | ROPS - FOPS level 2 cab                                |
| Controls                                    |           | JSM                                                    |
| Attachment recognition system (E-Reco)      |           | Standard                                               |

## MHT-X 10160 ST3A - Diagrama dimensional

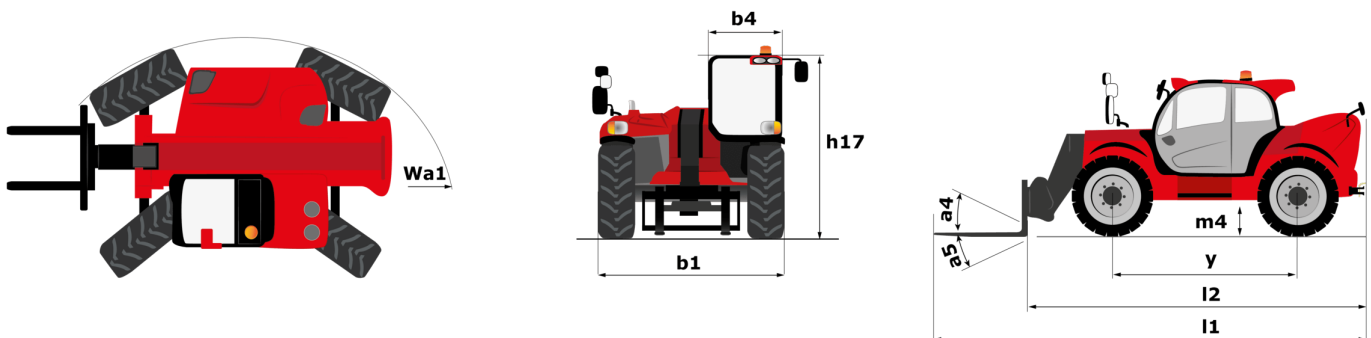


## MHT-X 10160 ST3A - Diagramas de carga


Machine on tyres with forks LC 600 mm Metric

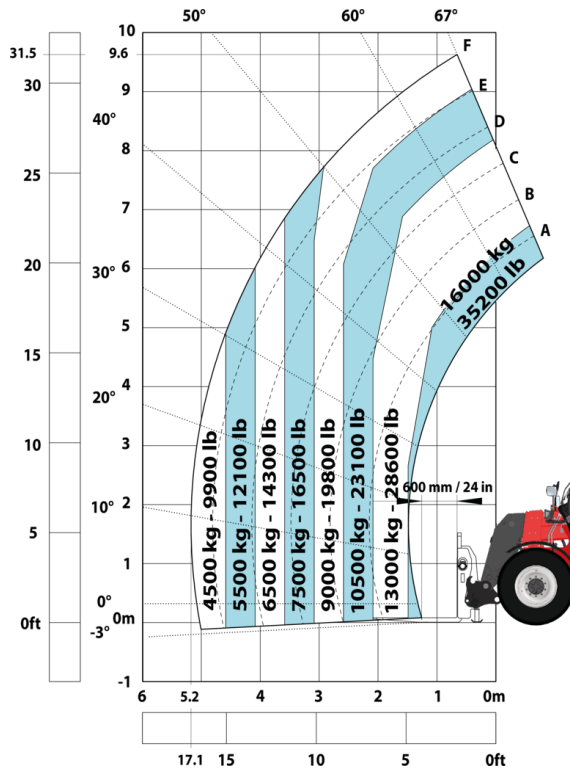


Machine on tyres with forks LC 1200 mm Metric

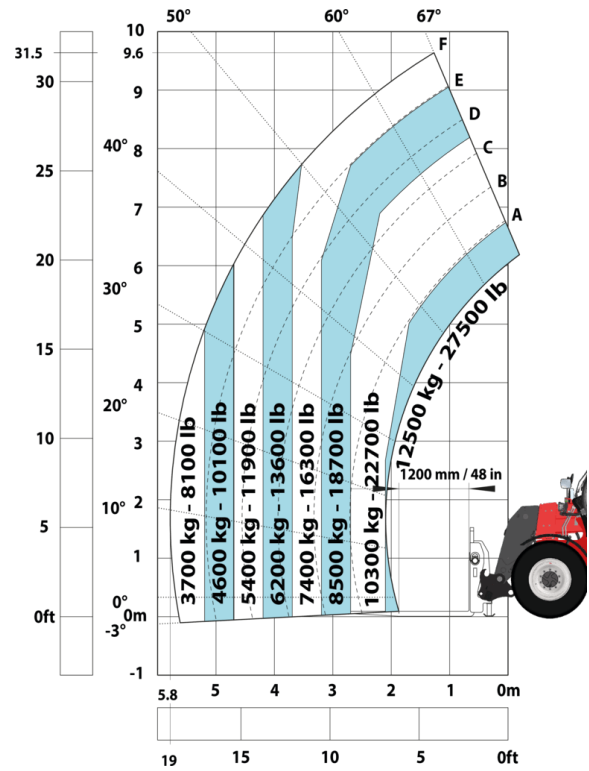


Machine on tyres with 3-hook jib 16000 kg (Metric)

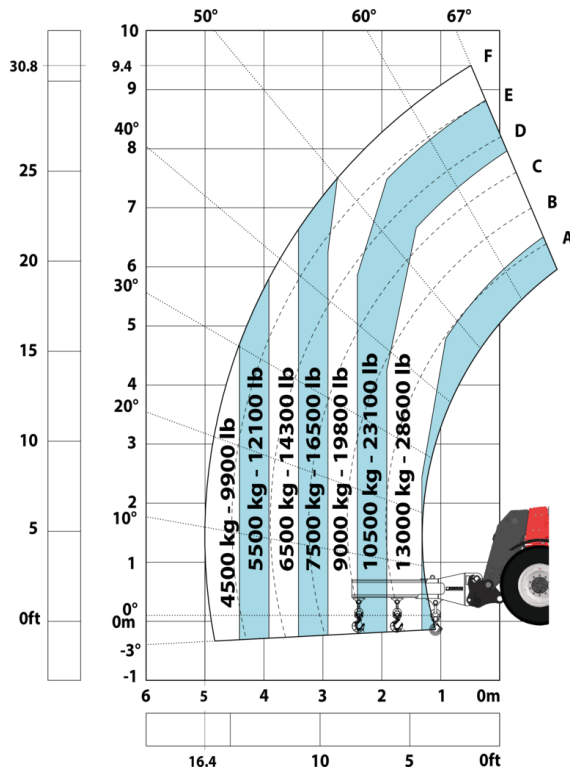


Machine on tyres with platform Metric

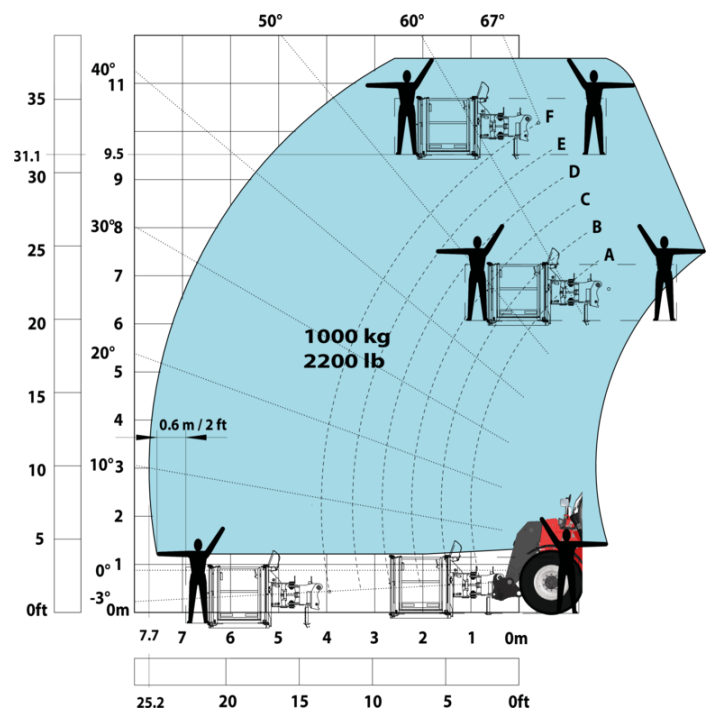

Machine on tyres with tyre handler TH 51 (Metric)

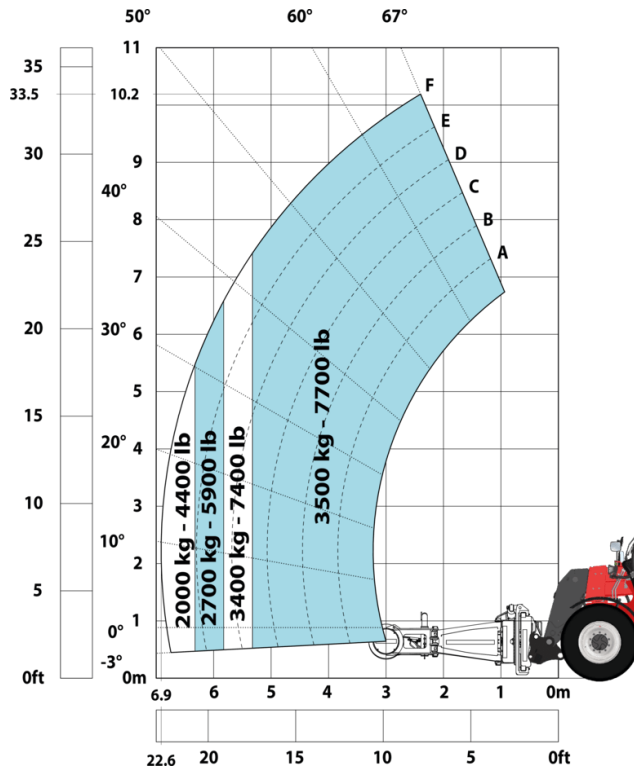

Machine on tyres with cylinder handler CH 4 (Metric)

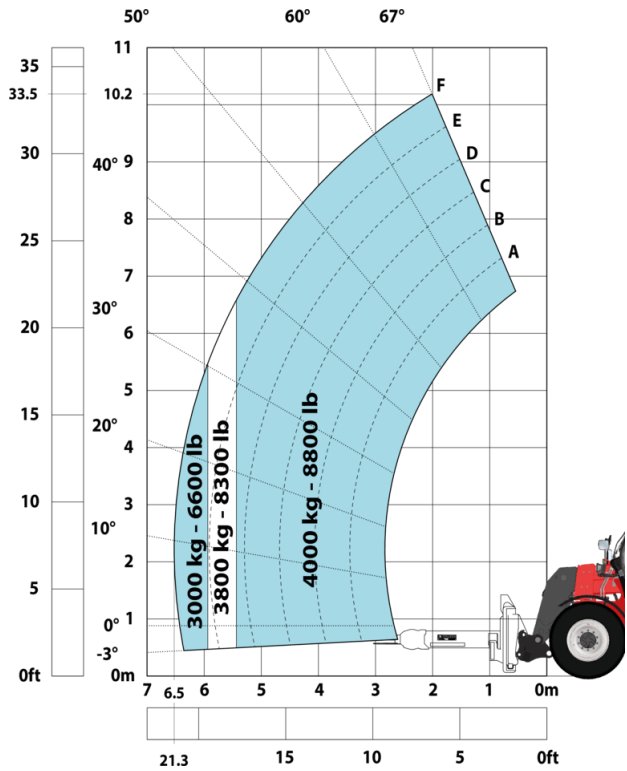



**Oficina Central**

B.P. 249 - 430 rue de l'Aubinière

44150 Ancenis Cedex - Francia

Tel.: 00 33 (0)2 40 09 10 11 - Fax: 00 33 (0)2 40 09 10 97

[www.manitou.com](http://www.manitou.com)



Esta publicación describe las versiones y posibilidades de configuración de los productos Manitou que puedan diferir en equipamiento. Los equipamientos presentados en este folleto pueden ser de serie, opcionales o no estar disponibles en algunas versiones. Manitou se reserva el derecho, en cualquier momento y sin previo aviso, de modificar las especificaciones descritas y representadas. Las especificaciones aportadas no comprometen al fabricante. Para más información, póngase en contacto con su concesionario Manitou. Documento no contractual. Presentación de los productos no contractual. Lista de especificaciones no exhaustiva. Los logos y la identidad visual de la empresa son propiedad de Manitou y no pueden ser utilizados sin autorización. Todos los derechos reservados. Las fotos y los esquemas contenidos en este folleto se ofrecen para consulta y a título indicativo solamente.

Manitou BF SA - Sociedad anónima con Consejo de Administración - Capital social: 39 668 399 euros - 857 802 508 RCS Nantes