

Technical sheet :


MI-X 15 D



 **MANITOU**
HANDLING YOUR WORLD

Technical characteristics		Metric	
1.1	Manufacturer	MANITOU	
1.2	Model Name	MI-X 15 D	
1.3	Power source	Diesel	
1.4	Operator type	Seated	
1.5	Max. capacity	1500 kg	
1.6	Load center of gravity	500 mm	
1.8	Load distance, centre of drive axle to fork	405 mm	
1.9	Wheelbase	1420 mm	
Weight			
2.1	Service weight	2905 kg	
2.2	Weight on front axle (laden) / rear axle (laden)	3820 kg / 585 kg	
2.3	Weight on front axle (Unladen) / rear axle (Unladen)	1325 kg / 1580 kg	
Wheels			
3.1	Tires type	Solid tires	
3.2	Dimensions of front wheels	6.50-10 10	
3.3	Dimensions of rear wheels	5.00-8 8	
3.5	Number of front wheels / rear wheels	2 / 2	
3.5.2	Number of drive wheels	2	
3.6	Front wheel gauge	900 mm	
3.7	Rear wheel gauge	920 mm	
Dimensions			
4.8	Seat height/stand height	1160 mm	
4.7	Height of overhead guard (cabin)	2090 mm	
4.12	Height of towing bar (coupling height)	315 mm	
4.19	Overall length	3310 mm	
4.20	Length to face of forks	2240 mm	
4.21	Overall width	1080 mm	
4.21	Overall width - Single wheels	1080 mm	
4.21	Overall width - Twinned wheels	1500 mm	
4.22	Forks section / width / length	35 mm x 100 mm x 1150 mm	
4.23	Fork carriage ISO 2328 (class/form) A/B	2A	
4.24	Fork carriage width	1000 mm	
4.31	Ground clearance below mast	115 mm	
4.32	Ground clearance at centre of wheelbase	150 mm	
4.33	Aisle Width for pallets 1000 x 1200 crossways	3590 mm	
4.34	Aisle width for 800 x 1200 pallet lengthways	3790 mm	
4.35	Turning radius	1985 mm	
4.36	Internal turning radius (over tyres)	55 mm	
Performances			
5.1	Travel speed (laden / unladen)	18.50 km/h-19 km/h	
5.2	Lifting speed (laden / unladen)	0.50 m/s-0.55 m/s	
5.3	Lowering speed (laden / unladen)	0.50 m/s-0.55 m/s	
5.5	Drawbar pull (Laden / Unladen)	1450 daN / 760 daN	
5.7	Gradeability (laden / unladen)	20 % / 20 %	
5.10	Service brake	Hydraulic	
	Transmission type	Torque converter	
Engine			
7.1	Engine brand / model / nom	Yanmar / 4TNE92-HRJ / Stage IIIA	
7.2	Engine power (Hp / kW)	45 Hp/32.80 kW	
7.3	Rated speed	2450 rpm	
7.4	Number of cylinders / Capacity of cylinders	4 - 2065 cm ³	
Miscellaneous			
8.2	Working hydraulic pressure for attachments	160 bar	
8.3	Oil flow rate for attachments	56 l/min	
8.4	Measured/guaranteed mean noise level at the ear of the operator	86 dB	
8.4	Sound level at the driver's ear according to DIN 12 053	86 dB	

MI-X 15 D - Dimensional drawing

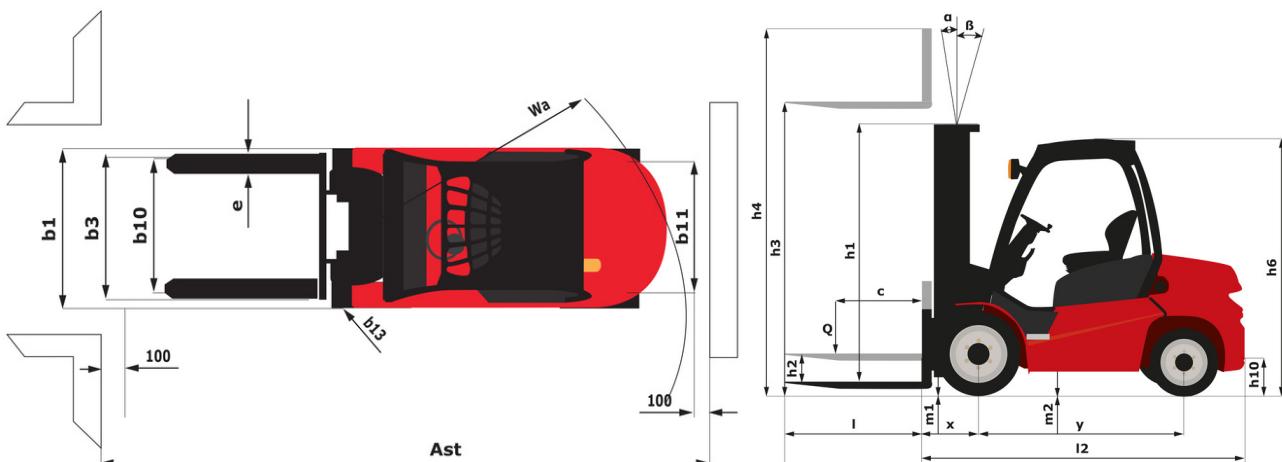

Characteristics of masts and residual capacities

Full Visibility Duplex (FVD)	FVD 30	FVD 33	FVD 37	FVD 40
α - Mast/fork carriage tilt, forward °	6	6	6	6
β - Mast/fork carriage tilt, backward °	12	12	12	12
h1 - Mast lowered height mm	1995	2145	2395	2595
h2 - Mast free lift mm	155	155	155	155
h3 - Mast lifting height mm	3000	3300	3700	4000
h4 - Mast extended height mm	3565	3865	4265	4600
Residual capacity at max height kg	1500	1500	1500	1500
Residual capacity with integrated side shift at max height kg	1500	1500	1500	1500
Height at max capacity mm	3000	3300	3700	4000
Height at max capacity with integrated sideshift mm	3000	3300	3700	4000

Free Lift Duplex (FLD)	FLD 33	FLD 37	FLD 40
α - Mast/fork carriage tilt, forward	°	6	6
β - Mast/fork carriage tilt, backward	°	12	12
h1 - Mast lowered height	mm	2160	2360
h2 - Mast free lift	mm	1575	1755
h3 - Mast lifting height	mm	3300	3700
h4 - Mast extended height	mm	3885	4285
Residual capacity at max height	kg	1500	1500
Residual capacity with integrated side shift at max height	kg	1500	1500
Height at max capacity	mm	3300	3700
Height at max capacity with integrated sideshift	mm	3300	3700



MANITOU HANDLING YOUR WORLD

Head Office

B.P. 249 - 430 rue de l'Aubinière

44150 Ancenis Cedex - France

Tel: +33 (0)2 40 09 10 11 - Fax: +33 (0)2 40 09 10 97

www.manitou.com



This publication provides a description of the configuration versions and options for Manitou products, which may differ for equipment. The equipment presented in this brochure may be part of a series, as an option, or it may not be available, depending on the versions. Manitou reserves the right, at any time and without notice, to amend the specifications described and represented. The specifications provided do not bind the manufacturer. For more details, please contact your Manitou agent. This is not a contractually binding document. The presentation of the products is not contractually binding. List of specifications non-exhaustive. The logos as well as the visual identity of the company are owned by Manitou and cannot be used without authorisation. All rights reserved. The photos and diagrams contained in this brochure are only provided for consultation and information purposes.

MANITOU BF SA - Limited company with board of directors - Share capital: 39,668,399 euros - 857 802 508 RCS Nantes