Technical sheet:

MRT 2260


VISION +







	MRT 2260 Created on November 1, 2025 at 1:16 PM	<u> 1 UT (</u>
Capacities	Metric	
Max. capacity	6000 kg	
Max. lifting height	21.80 m	
Maximum outreach	18.20 m	
Weight and dimensions		
Overall length (with forks)	I1 8.17 m	
Length to face of forks	l2 6.97 m	
Overall width	b1 2.50 m	
Overall height	h17 3.10 m	
Overall cab width	b4 0.96 m	
External turning radius (over tyres)	Wa1 4.46 m	
Ground clearance	m4 0.38 m	
Wheelbase		
	·	
Tilt-up angle		
Tilt-down angle	a5 110°	
Turret rotation	360 °	
Overall weight	18000 kg	
Forks length / width / section	I / e / s 1200 mm x 100 mm x 60 mm	
Wheels		
Standard tires	445/65 R22,5	
Drive wheels (front / rear)	2/2	
Steering mode	2 wheel steer, 4 wheel steer, Crab mode	
Stabilisers		
Stabilizers Type	Telescopic Duplex	
Controls for stabs	Stabs Commands Individual or Simultaneou	JS
Engine		
Engine brand	Yanmar	
Engine norm	Stage V, Tier 4	
Engine model	4TN107FHT-6SMU1	
Engine power (Hp / kW)	156 Hp / 115 kW	
Max. torque / Engine rotation (min)	602 Nm @ 1500 rpm	
Number of cylinders - Capacity of cylinders	4 - 4567 cm ³	
Engine cooling system	Water cooled	
Electric circuit	Water 666164	
Number of batteries / Battery voltage	2 x 12 V	
12V Battery capacity	120 Ah	
Battery starting current	(EN)850 A	
Transmission	(LN)030 A	
Transmission type	Hydrostatic	
71	,	
Gearbox / Number of gears (forward) / Number of gears (reverse)	Speedshift / 2 / 2	
Max. travel speed	40 km/h	
Drawbar pull	8600 daN	
Parking brake	Automatic negative parking brake	
Service brake	Oil-immersed multi-discs braking on front & r axles	rear
Performances		
Gradeability (laden / unladen)	40.40 % / 45.50 %	
Hydraulics	10.10 10/10.00 10	
Hydraulic pump type	Variable displacement pump	
Hydraulic flow	172 l/min	
Hydraulic Pressure	350 bar	
•	330 Dai	
Tank capacities	10.1	
Engine oil	131	
Fuel	270	
Diesel Exhaust fluid (AdBlue® type)	241	
Noise and vibration		
Noise at driving position (LpA)	68 dB	
Noise to environment (LwA)	108 dB	
Vibration on hands/arms	< 2.50 m/s²	
Miscellaneous		
Steering wheels (front / rear)	2 / 2	
Controls	2 Joysticks	
Cab certification	Cabin ROPS - FOPS level 2	
Attachment recognition system (E-Reco)	Standard	

MRT 2260 - Dimensional drawing








ther data	
ength of frame	
/heelbase	
round clearance	
ounterweight offset (turret at 90°)	
verall length at stabilisers	
verall width with stabilisers extended	
rame leveling corrector	
round clearance under front tires on stabilizers	


	Metric
l14	5.69 m
у	3.05 m
m4	0.38 m
a7	2.97 m
l12	5.30 m
b7	5.79 m
a9	+/- 7 °
m5	0.38 m

MRT 2260 - Load chart


Machine on tires with forks Metric

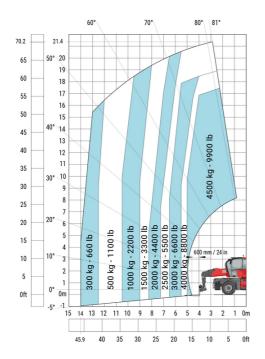


Machine on lowered stabilisers with forks (CAF) Metric

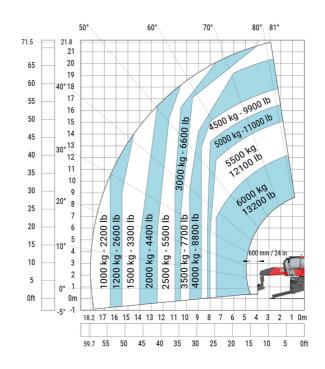


Machine on lowered stabilisers with winch 6000 kg (Metric) Machine on lowered stabilisers with 1500 kg jib with winch (Metric)

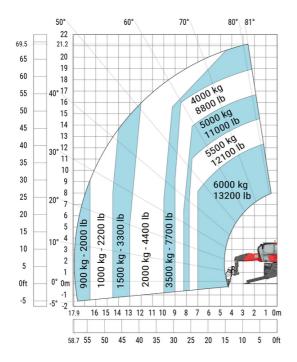


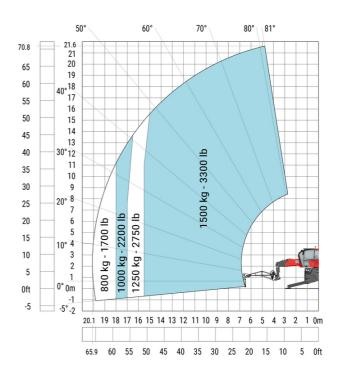


Machine on lowered stabilisers with extensible jib with winch (Metric)

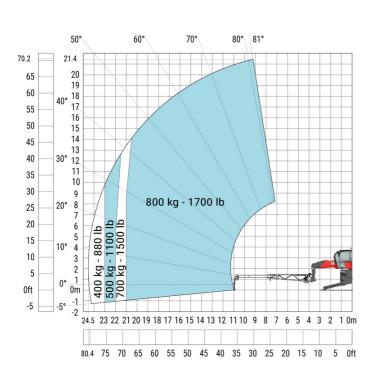


Machine on lowered stabilisers with hook 6000 kg (Metric)

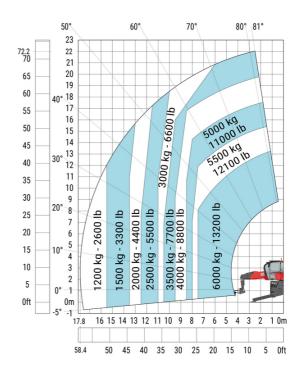


Machine on lowered stabilisers with 365 kg platform Metric Machine on lowered stabilisers with 1000 kg platform Metric

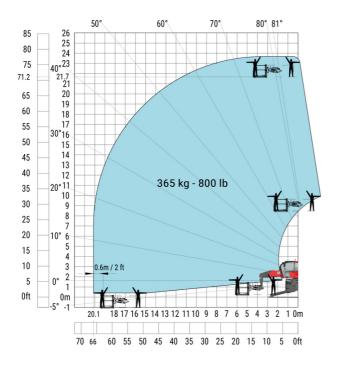


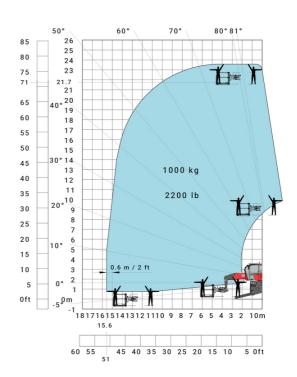

Machine on lowered stabilisers with 3D positive Metric

Machine on lowered stabilisers with 3D positive / negative Metric

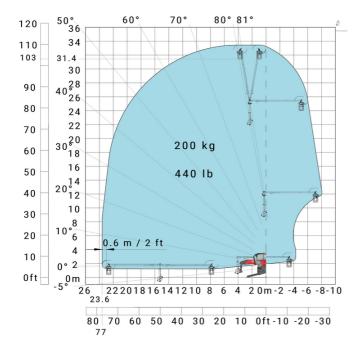

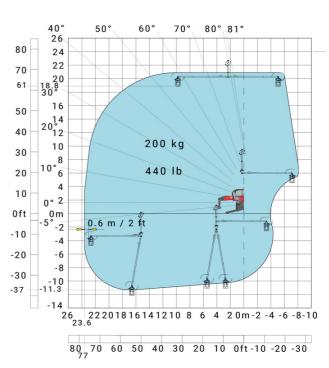





Head Office

B.P. 249 - 430 rue de l'Aubinière 44150 Ancenis Cedex - France Tel: +33 (0)2 40 09 10 11 - Fax: +33 (0)2 40 09 10 97 www.manitou.com



This publication provides a description of the configuration versions and options for Manitou products, which may differ for equipment. The equipment presented in this brochure may be part of a series, as an option, or it may not be available, depending on the versions. Manitou reserves the right, at any time and without notice, to amend the specifications described and represented. The specifications provided do not bind the manufacturer. For more details, please contact your Manitou agent. This is not a contractually binding document. The presentation of the products is not contractually binding. List of specifications non-exhaustive. The logos as well as the visual identity of the company are owned by Manitou and cannot be used without authorisation. All rights reserved. The photos and diagrams contained in this brochure are only provided for consultation and information purposes.

MANITOU BF SA - Limited company with board of directors - Share capital: 39,668,399 euros - 857 802 508 RCS Nantes