

Ficha técnica :


# MRT 3570 ES

**VISION +**




 **MANITOU**  
HANDLING YOUR WORLD


| Capacities                                  |           | Métrico                                                |
|---------------------------------------------|-----------|--------------------------------------------------------|
| Max. capacity                               |           | 7000 kg                                                |
| Max. lifting height                         |           | 34.70 m                                                |
| Max. outreach                               |           | 28 m                                                   |
| Weight and dimensions                       |           |                                                        |
| Overall length (with forks)                 | l1        | 10.06 m                                                |
| Length to face of forks                     | l2        | 8.86 m                                                 |
| Overall width                               | b1        | 2.50 m                                                 |
| Overall height                              | h17       | 3.26 m                                                 |
| Overall cab width                           | b4        | 0.96 m                                                 |
| Ground clearance                            | m4        | 0.39 m                                                 |
| Wheelbase                                   | y         | 3.75 m                                                 |
| Frame leveling longitudinal +/-             |           | 3 °                                                    |
| Tilt-up angle                               | a4        | 13 °                                                   |
| Tilt-down angle                             | a5        | 108 °                                                  |
| Turret rotation                             |           | 360 °                                                  |
| Overall weight                              |           | 24000 kg                                               |
| Forks length / width / section              | l / e / s | 1200 mm x 125 mm x 60 mm                               |
| Wheels                                      |           |                                                        |
| Standard tires                              |           | 17,5-R25                                               |
| Drive wheels (front / rear)                 |           | 2 / 2                                                  |
| Steering mode                               |           | 2 wheel steer, 4 wheel steer, Crab mode                |
| Stabilisers                                 |           |                                                        |
| Stabs Type                                  |           | Telescopic Triplex                                     |
| Controls with stabs                         |           | Stabs Commands Individual or Simultaneous              |
| Engine                                      |           |                                                        |
| Engine brand                                |           | Yanmar                                                 |
| Engine norm                                 |           | Stage V / Tier 4                                       |
| Engine model                                |           | 4TN107FTT-6SMU2                                        |
| I.C. Engine power rating / Power            |           | 211 Hp / 155 kW                                        |
| Max. torque / Engine rotation (min)         |           | 805 Nm @ 1500 rpm                                      |
| Number of cylinders - Capacity of cylinders |           | 4 - 4567 cm³                                           |
| Engine cooling system                       |           | Water cooled                                           |
| Electric circuit                            |           |                                                        |
| Number of batteries / Battery voltage       |           | 2 x 12 V                                               |
| 12V Battery capacity                        |           | 120 Ah                                                 |
| Battery starting current                    |           | (EN)850 A                                              |
| Transmission                                |           |                                                        |
| Transmission type                           |           | Hydrostatic with CVT                                   |
| Gearbox                                     |           | Speedshift                                             |
| Max. travel speed                           |           | 40 km/h                                                |
| Drawbar pull                                |           | 9300 daN                                               |
| Parking brake                               |           | Automatic negative parking brake                       |
| Service brake                               |           | Oil-immersed multi-discs braking on front & rear axles |
| Performances                                |           |                                                        |
| Gradeability (laden / unladen)              |           | 29 % / 38.70 %                                         |
| Hydraulics                                  |           |                                                        |
| Hydraulic pump type                         |           | Variable displacement pump                             |
| Hydraulic flow                              |           | 185 l/min                                              |
| Hydraulic Pressure                          |           | 350 bar                                                |
| Tank capacities                             |           |                                                        |
| Engine oil                                  |           | 13 l                                                   |
| Hydraulic oil                               |           | 300 l                                                  |
| Fuel tank                                   |           | 320 l                                                  |
| Diesel Exhaust fluid (AdBlue® type)         |           | 24 l                                                   |
| Noise and vibration                         |           |                                                        |
| Noise at driving position (LpA)             |           | 68 dB                                                  |
| Noise to environment (LwA)                  |           | 109 dB                                                 |
| Vibration to whole hand/arm                 |           | < 2.50 m/s²                                            |
| Miscellaneous                               |           |                                                        |
| Steering wheels (front / rear)              |           | 2 / 2                                                  |
| Controls                                    |           | 2 Joysticks                                            |
| Safety cab homologation                     |           | ROPS - FOPS level 2 cab                                |
| Attachment recognition system (E-Reco)      |           | Standard                                               |

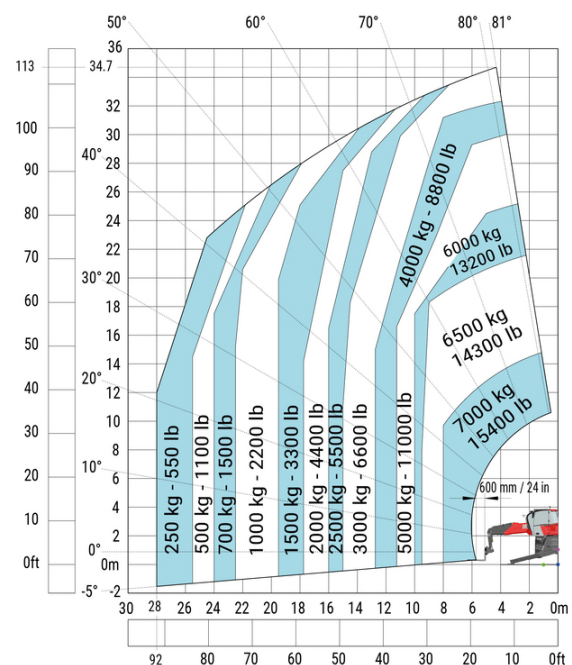


Machine on lowered stabilisers with winch 7200 kg (metric)

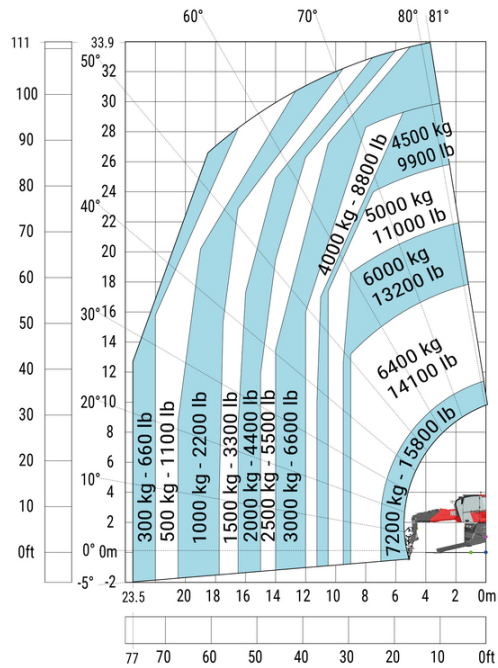


Machine on lowered stabilisers with 1500 kg jib Metric

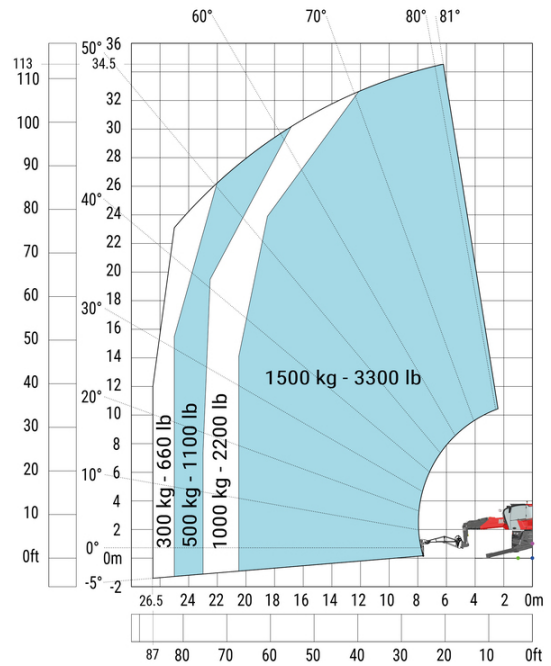


Machine on lowered stabilisers with hook 9000 kg (Metric)

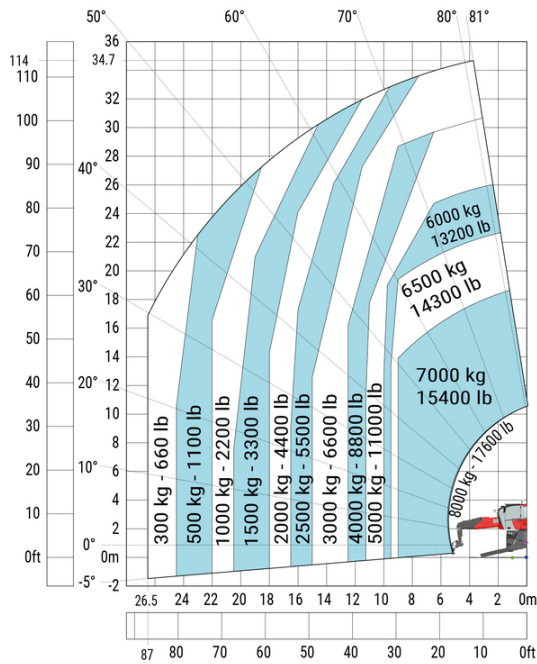

Machine on lowered stabilisers with 365 kg platform Metric

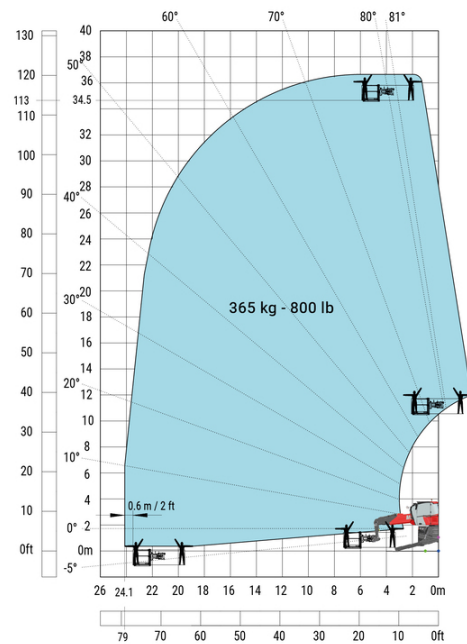

## Machine on lowered stabilisers with 3D positive Metric

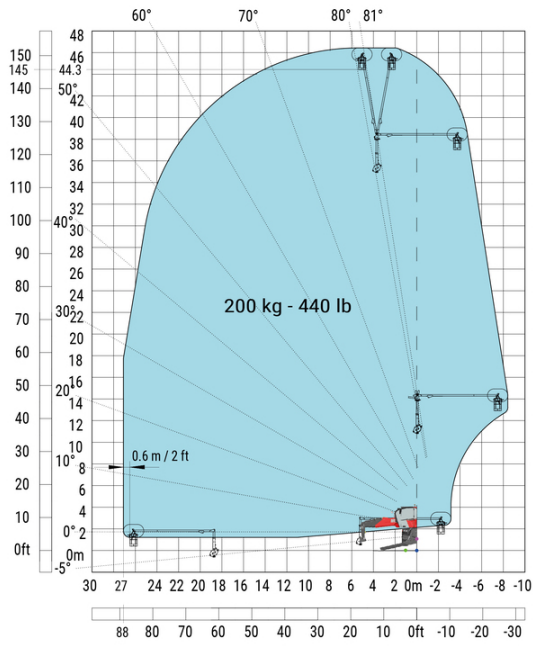



**Oficina Central**

B.P. 249 - 430 rue de l'Aubinière

44150 Ancenis Cedex - Francia

Tel.: 00 33 (0)2 40 09 10 11 - Fax: 00 33 (0)2 40 09 10 97

[www.manitou.com](http://www.manitou.com)



Esta publicación describe las versiones y posibilidades de configuración de los productos Manitou que puedan diferir en equipamiento. Los equipamientos presentados en este folleto pueden ser de serie, opcionales o no estar disponibles en algunas versiones. Manitou se reserva el derecho, en cualquier momento y sin previo aviso, de modificar las especificaciones descritas y representadas. Las especificaciones aportadas no comprometen al fabricante. Para más información, póngase en contacto con su concesionario Manitou. Documento no contractual. Presentación de los productos no contractual. Lista de especificaciones no exhaustiva. Los logos y la identidad visual de la empresa son propiedad de Manitou y no pueden ser utilizados sin autorización. Todos los derechos reservados. Las fotos y los esquemas contenidos en este folleto se ofrecen para consulta y a título indicativo solamente.

Manitou BF SA - Sociedad anónima con Consejo de Administración - Capital social: 39 668 399 euros - 857 802 508 RCS Nantes