

Technical sheet :

MRT-X 3060

VISION +



 **MANITOU**
HANDLING YOUR WORLD


The image contains three technical drawings of a forklift, each with dimension labels:

- Top View:** Shows the forklift from above. Dimensions include l_{12} (overall width), wa_1 (width of the mast), b_4 (width of the operator's seat area), h_{17} (height of the operator's seat area), a_9 (angle of the mast), m_5 (width of the mast base), b_1 (width of the mast base), and b_7 (overall width of the mast base).
- Side View:** Shows the forklift from the side. Dimensions include a_7 (overall length), a_4 (height of the mast), a_5 (height of the mast base), m_4 (width of the mast base), y (width of the mast base), l_{14} (width of the mast base), l_2 (overall length), and l_1 (overall length).
- Front View:** Shows the forklift from the front. Dimensions include a_7 (overall length), a_4 (height of the mast), a_5 (height of the mast base), m_4 (width of the mast base), y (width of the mast base), l_{14} (width of the mast base), l_2 (overall length), and l_1 (overall length).


Other data		Metric
Length of frame	l14	5.92 m
Wheelbase	y	3.25 m
Ground clearance	m4	0.38 m
Counterweight offset (turret at 90°)	a7	3.45 m
Tilt-up angle	a4	12 °
Tilt-down angle	a5	110 °
Overall length at stabilisers	l12	5.62 m
External turning radius (over tyres)	Wa1	4.63 m
Overall width with stabilisers extended	b7	6.04 m
Overall height	h17	3.10 m
Frame leveling corrector	a9	+/- 7 °
Ground clearance under front tires on stabilizers	m5	0.40 m

MRT-X 3060 - Load chart



Machine on tires with forks Metric

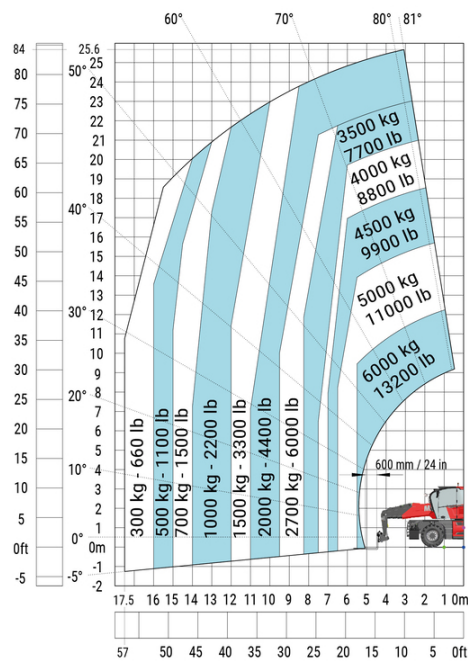


Machine on lowered stabilisers with forks (CAF) Metric

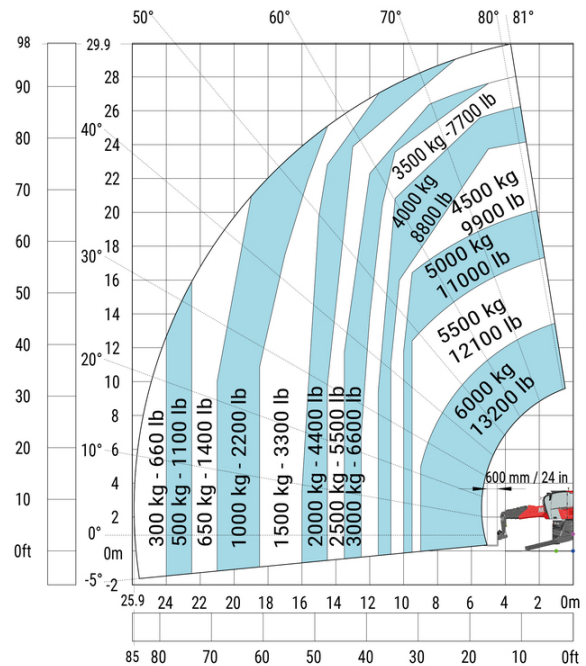


Machine on lowered stabilisers with winch 6000 kg (Metric) Machine on lowered stabilisers with 2000 kg jib (Metric)

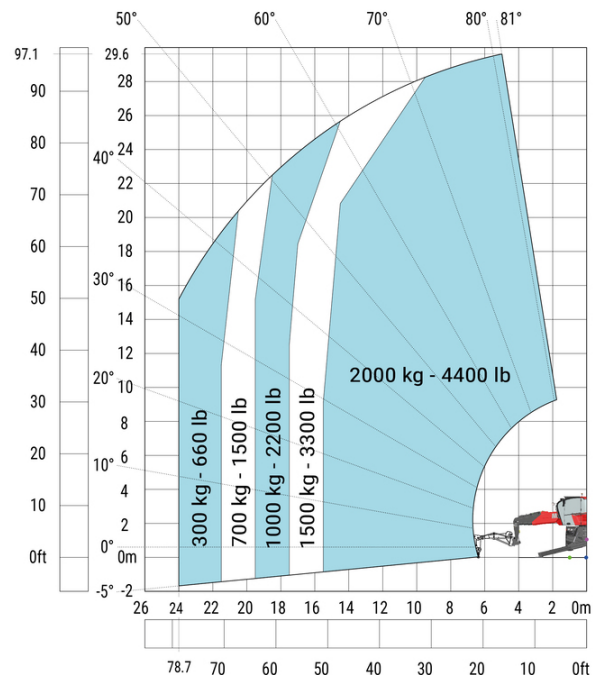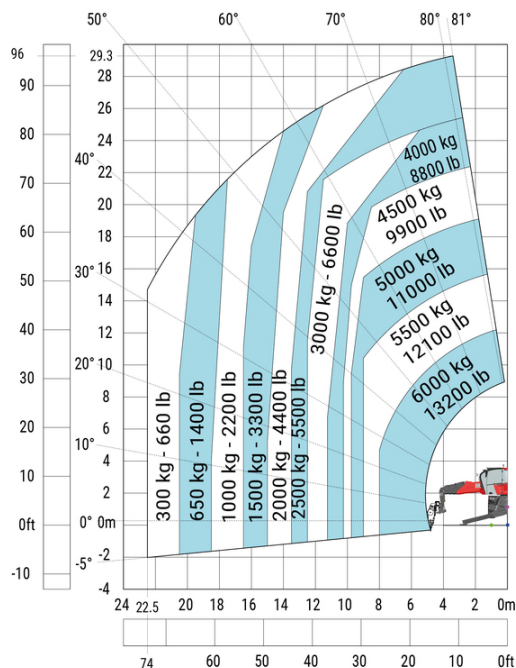


Machine on lowered stabilisers with 6000 kg jib (Metric)

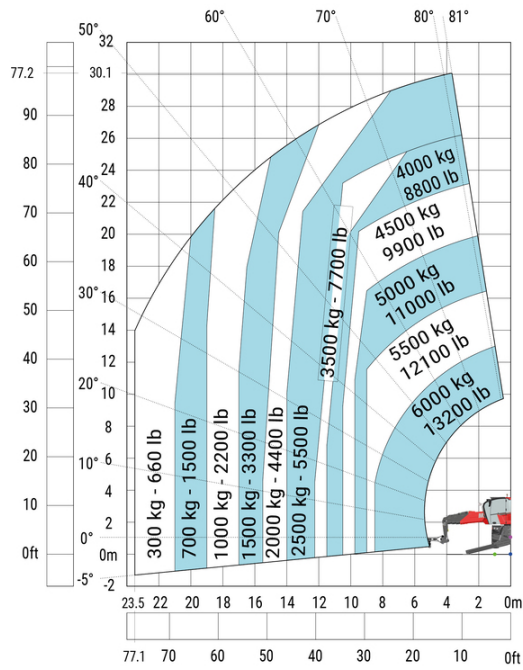


Machine on lowered stabilisers with 2000 kg jib with winch (Metric)

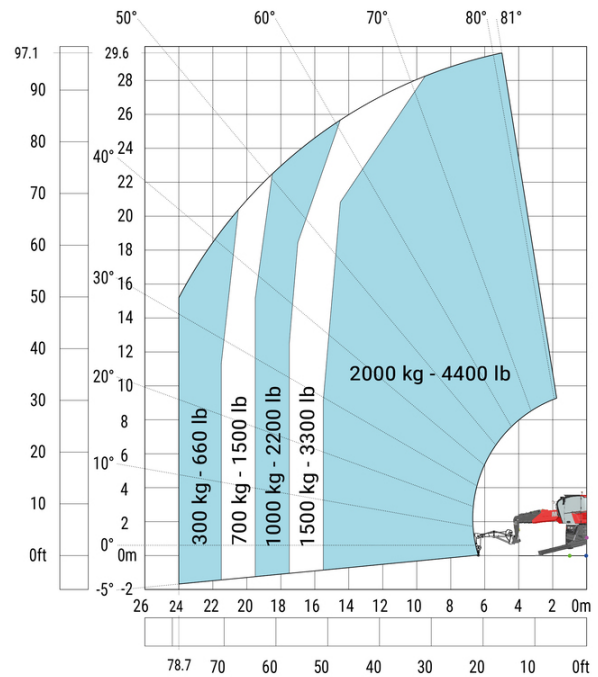



Machine on lowered stabilisers with extensible jib with winch (Metric)

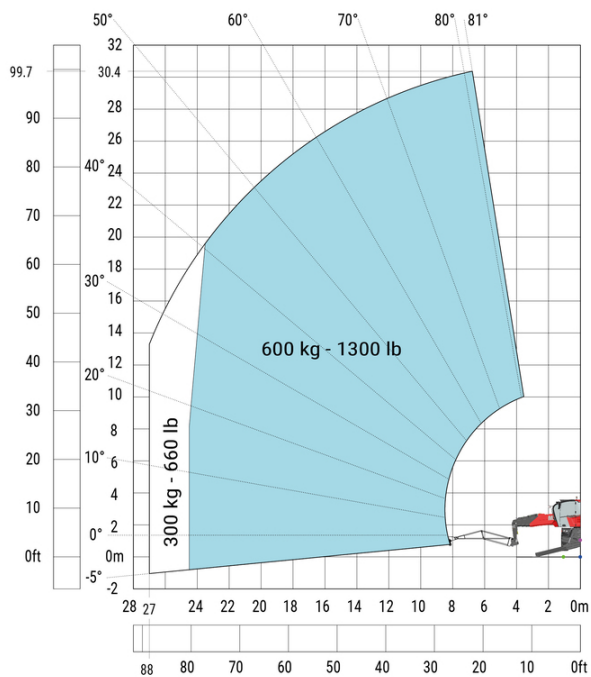


Machine on lowered stabilisers with hook 6000 kg (Metric)

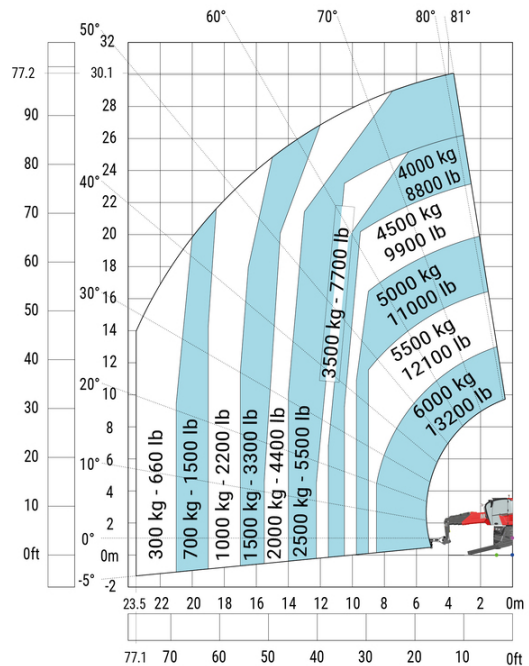


Machine on lowered stabilisers with 365 kg platform Metric Machine on lowered stabilisers with 1000 kg platform Metric

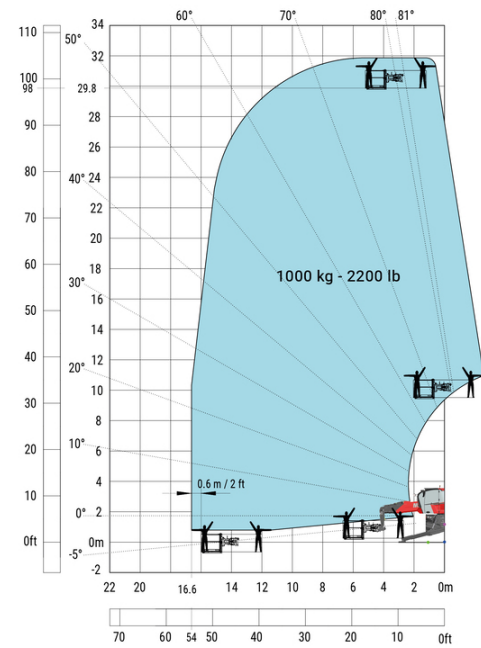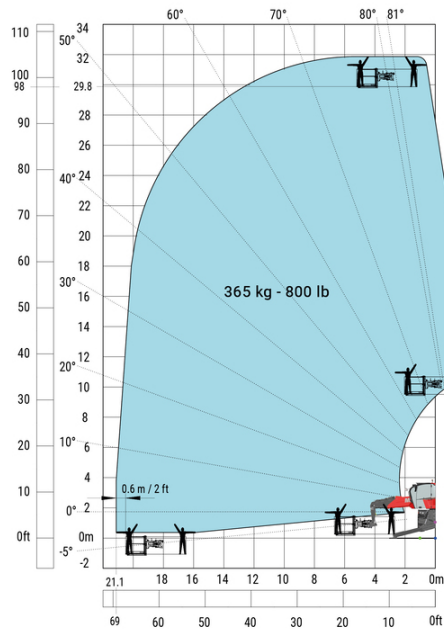

Machine on lowered stabilisers with 3D positive Metric

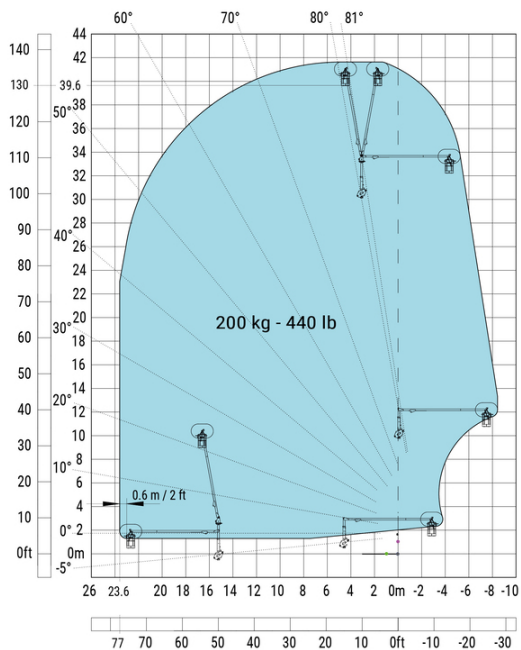

Machine on lowered stabilisers with 3D negative Metric

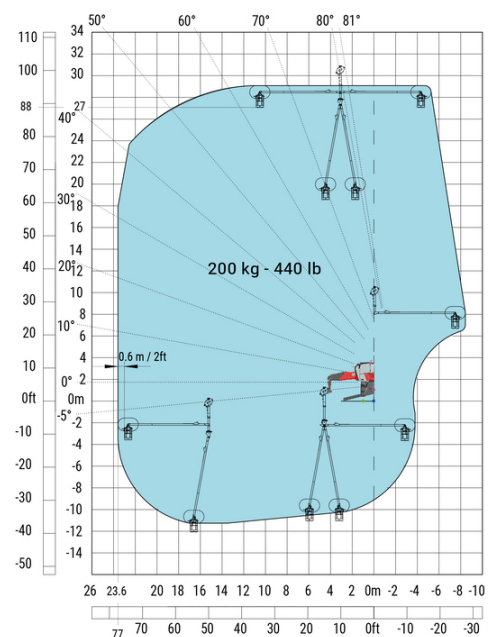



Head Office

B.P. 249 - 430 rue de l'Aubinière

44150 Ancenis Cedex - France

Tel: +33 (0)2 40 09 10 11 - Fax: +33 (0)2 40 09 10 97

www.manitou.com



This publication provides a description of the configuration versions and options for Manitou products, which may differ for equipment. The equipment presented in this brochure may be part of a series, as an option, or it may not be available, depending on the versions. Manitou reserves the right, at any time and without notice, to amend the specifications described and represented. The specifications provided do not bind the manufacturer. For more details, please contact your Manitou agent. This is not a contractually binding document. The presentation of the products is not contractually binding. List of specifications non-exhaustive. The logos as well as the visual identity of the company are owned by Manitou and cannot be used without authorisation. All rights reserved. The photos and diagrams contained in this brochure are only provided for consultation and information purposes.

MANITOU BF SA - Limited company with board of directors - Share capital: 39,668,399 euros - 857 802 508 RCS Nantes