Technical sheet:

MRT-X 3570


VISION +







11 12 b1 h17 b4 Wa1 m4 y a4 a5	Metric 7000 kg 34.70 m 28 m 10.06 m 8.86 m 2.50 m 3.26 m 0.96 m 5.06 m 0.44 m 3.75 m 13 ° 108 ° 23800 kg 1200 mm x 125 mm x 60 mm
12 b1 h17 b4 Wa1 m4 y a4	7000 kg 34.70 m 28 m 10.06 m 8.86 m 2.50 m 3.26 m 0.96 m 5.06 m 0.44 m 3.75 m 13 ° 108 ° 360 ° 23800 kg
12 b1 h17 b4 Wa1 m4 y a4	34.70 m 28 m 10.06 m 8.86 m 2.50 m 3.26 m 0.96 m 5.06 m 0.44 m 3.75 m 13 ° 108 ° 360 ° 23800 kg
12 b1 h17 b4 Wa1 m4 y a4	28 m 10.06 m 8.86 m 2.50 m 3.26 m 0.96 m 5.06 m 0.44 m 3.75 m 13 ° 108 ° 360 ° 23800 kg
12 b1 h17 b4 Wa1 m4 y a4	8.86 m 2.50 m 3.26 m 0.96 m 5.06 m 0.44 m 3.75 m 13 ° 108 ° 360 ° 23800 kg
12 b1 h17 b4 Wa1 m4 y a4	8.86 m 2.50 m 3.26 m 0.96 m 5.06 m 0.44 m 3.75 m 13 ° 108 ° 360 ° 23800 kg
b1 h17 b4 Wa1 m4 y a4	8.86 m 2.50 m 3.26 m 0.96 m 5.06 m 0.44 m 3.75 m 13 ° 108 ° 360 ° 23800 kg
b1 h17 b4 Wa1 m4 y a4	2.50 m 3.26 m 0.96 m 5.06 m 0.44 m 3.75 m 13 ° 108 ° 360 ° 23800 kg
h17 b4 Wa1 m4 y a4	3.26 m 0.96 m 5.06 m 0.44 m 3.75 m 13 ° 108 ° 360 °
b4 Wa1 m4 y a4 a5	0.96 m 5.06 m 0.44 m 3.75 m 13 ° 108 ° 360 °
Wa1 m4 y a4 a5	5.06 m 0.44 m 3.75 m 13 ° 108 ° 360 ° 23800 kg
m4 y a4 a5	0.44 m 3.75 m 13 ° 108 ° 360 ° 23800 kg
y a4 a5	3.75 m 13 ° 108 ° 360 ° 23800 kg
a4 a5	13° 108° 360° 23800 kg
a5	108° 360° 23800 kg
	360 ° 23800 kg
1/e/s	23800 kg
I/e/s	
17.67.5	1200 11111 X 123 11111 X 00 11111
	17,5-R25
	2/2
	2 wheel steer, 4 wheel steer, Crab mode
	2 Wheel Steel, 4 Wheel Steel, Glab Houe
	Talasaania Triplay
	Telescopic Triplex
	Stabs Commands Individual or Simultaneous
	Venner
	Yanmar
	Stage IIIA
	4TN107FTT-6SMU2
	211 Hp / 155 kW
	805 Nm @ 1500 rpm
	4 - 4567 cm³
	Water cooled
	0 10 V
	2 x 12 V
	120 Ah
	850 A
	W 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1
	Hydrostatic with CVT
	Speedshift
	40 km/h
	9300 daN
	Automatic negative parking brake
	Oil-immersed multi-discs braking on front & rear axles
	uxico
	29 % / 38.70 %
	27 10 30.10 10
	Variable displacement pump
	variable displacement pump 172 l/min
	350 bar
	330 ngi
	101
	13
	320
	(0.10
	68 dB
	109 dB
	2.60 m/s²
	2/2
	2 Joysticks
	Cabin ROPS - FOPS level 2 Standard

MRT-X 3570 - Dimensional drawing








Other data	
Length of frame	
Wheelbase	
Ground clearance	
Counterweight offset (turret at 90°)	
Overall length at stabilisers	
Overall width with stabilisers extended	
Frame leveling corrector	
Ground clearance under front tires on stabilizers	


	Metric
l14	6.80 m
у	3.75 m
m4	0.44 m
a7	3.75 m
l12	6.50 m
b7	7.42 m
a9	8 °
m5	0.40 m

MRT-X 3570 - Load chart

Machine on tires with forks Metric

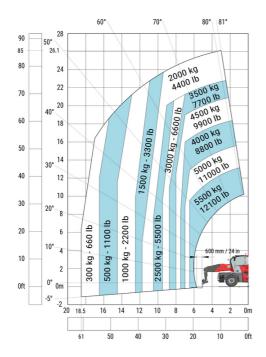



Machine on lowered stabilisers with forks Metric

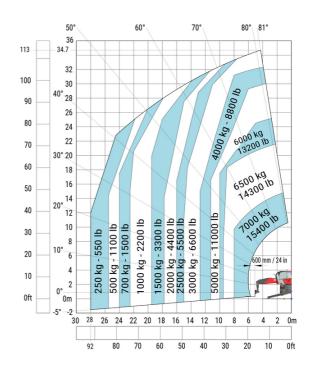


Machine on lowered stabilisers with winch 7200 kg (metric)


Machine on lowered stabilisers with 1500 kg jib Metric

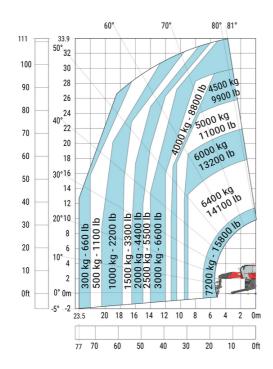

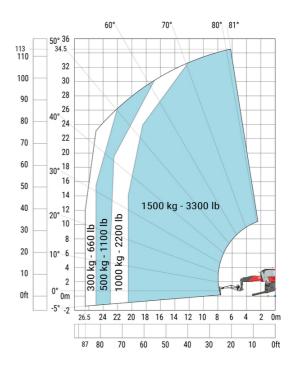


Machine on lowered stabilisers with hook 9000 kg (Metric) Machine on lowered stabilisers with 365 kg platform Metric

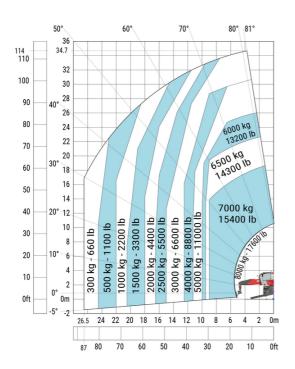

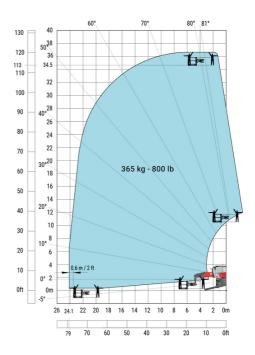

Machine on lowered stabilisers with 3D positive Metric







Head Office

B.P. 249 - 430 rue de l'Aubinière 44150 Ancenis Cedex - France Tel: +33 (0)2 40 09 10 11 - Fax: +33 (0)2 40 09 10 97 www.manitou.com



This publication provides a description of the configuration versions and options for Manitou products, which may differ for equipment. The equipment presented in this brochure may be part of a series, as an option, or it may not be available, depending on the versions. Manitou reserves the right, at any time and without notice, to amend the specifications described and represented. The specifications provided do not bind the manufacturer. For more details, please contact your Manitou agent. This is not a contractually binding document. The presentation of the products is not contractually binding. List of specifications non-exhaustive. The logos as well as the visual identity of the company are owned by Manitou and cannot be used without authorisation. All rights reserved. The photos and diagrams contained in this brochure are only provided for consultation and information purposes.

MANITOU BF SA - Limited company with board of directors - Share capital: 39,668,399 euros - 857 802 508 RCS Nantes