

Technical sheet :


# MSI-X 25



 **MANITOU**  
HANDLING YOUR WORLD

Technical characteristics		Metric	
1.1	Manufacturer	Manitou	
1.2	Model Name	MSI-X 25	
1.3	Power source	Diesel	
1.4	Operator type	Seated	
1.5	Max. capacity	2500 kg	
1.6	Load center of gravity	500 mm	
1.8	Load distance, centre of drive axle to fork	621 mm	
1.9	Wheelbase	1900 mm	
Weight			
2.1	Service weight	3875 kg	
2.2	Weight on front axle (laden) / rear axle (laden)	5510 kg / 865 kg	
2.3	Weight on front axle (Unladen) / rear axle (Unladen)	1533 kg / 2342 kg	
Wheels			
3.1	Tires type	Inflatable	
3.2	Dimensions of front wheels	300-15/18 6T R43	
3.3	Dimensions of rear wheels	7.00-12/12 ED PLUS	
3.5	Number of front wheels / rear wheels	2 / 2	
3.5.2	Number of drive wheels	2	
3.6	Front wheel gauge	1044 mm	
3.7	Rear wheel gauge	1108 mm	
Dimensions			
4.8	Seat height/stand height	972 mm	
4.7	Height of overhead guard (cabin)	2095 mm	
4.19	Overall length	4193 mm	
4.20	Length to face of forks	3043 mm	
4.21	Overall width	1330 mm	
4.22	Forks section / width / length	40 mm x 122 mm x 1150 mm	
4.23	Fork carriage ISO 2328 (class/form) A/B	2A	
4.24	Fork carriage width	1260 mm	
4.31	Ground clearance below mast	260 mm	
4.32	Ground clearance at centre of wheelbase	238 mm	
4.33	Aisle Width for pallets 1000 x 1200 crossways	4591 mm	
4.35	Turning radius	2620 mm	
Performances			
5.1	Travel speed (laden / unladen)	18 km/h-22 km/h	
5.2	Lifting speed (laden / unladen)	0.50 m/s-0.50 m/s	
5.3	Lowering speed (laden / unladen)	0.50 m/s-0.30 m/s	
5.5	Drawbar pull (Laden / Unladen)	2010 daN / 1250 daN	
5.7	Gradeability (laden / unladen)	33 % / 34 %	
5.10	Service brake	Hydraulic brakes by loss of pressure	
Engine			
7.1	Engine brand / model / norm	Kubota / V2403 / Stage IIIA	
7.2	Engine power (Hp / kW)	49 Hp/36 kW	
7.3	Rated speed	2700 rpm	
7.4	Number of cylinders / Capacity of cylinders	4 - 2434 cm <sup>3</sup>	
Miscellaneous			
8.1	Type of drive control	Cable	
8.2	Working hydraulic pressure for attachments	180 bar	
8.3	Oil flow rate for attachments	45 l/min	
8.4	Measured/guaranteed mean noise level at the ear of the operator	80 dB	
8.4	Sound level at the driver's ear according to DIN 12 053	80 dB	

## MSI-X 25 - Dimensional drawing

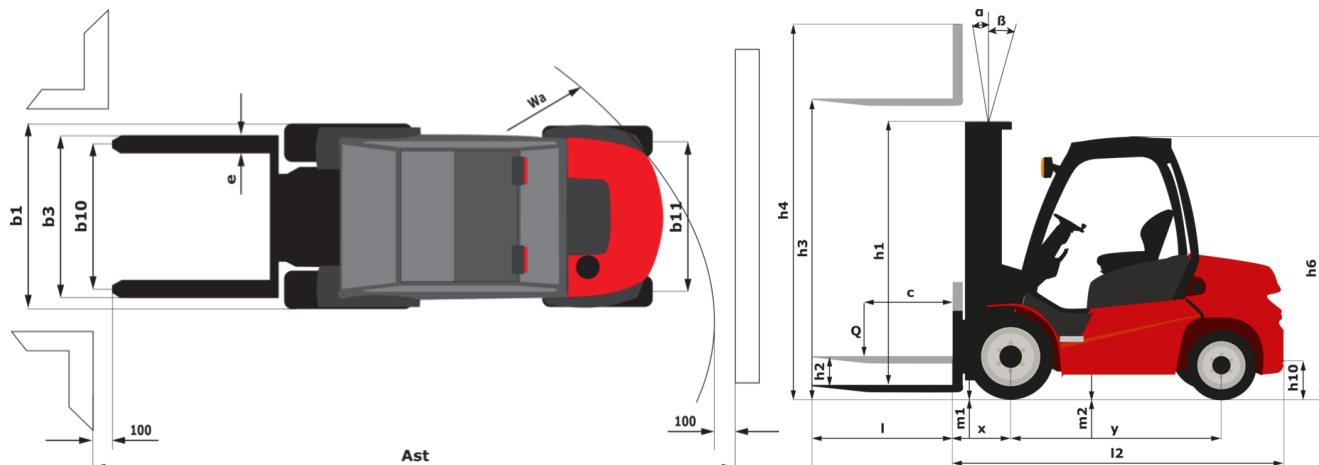

## Characteristics of masts and residual capacities

Full Visibility Duplex (FVD)	FVD 30	FVD 33	FVD 37	FVD 40	FVD 45
α - Mast/fork carriage tilt, forward °	10	10	10	10	10
β - Mast/fork carriage tilt, backward °	12	12	12	12	12
h1 - Mast lowered height mm	2136	2286	2546	2736	2986
h2 - Mast free lift mm	85	85	85	85	85
h3 - Mast lifting height mm	3000	3300	3700	4000	4500
h4 - Mast extended height mm	3738	4038	4438	4738	5238
Residual capacity at max height kg	2500	2500			
Height at max capacity mm	3000	3300	2500	2500	2500

Free Lift Triplex (FLT)	FLT 34	FLT 37	FLT 40	FLT 43	FLT 47	FLT 55	FLT 60
α - Mast/fork carriage tilt, forward °	10	10	10	10	10	6	6
β - Mast/fork carriage tilt, backward °	12	12	12	12	12	6	6
h1 - Mast lowered height mm	1936	2036	2136	2286	2386	2736	2986
h2 - Mast free lift mm	1183	1283	1383	1483	1633	1893	2083
h3 - Mast lifting height mm	3400	3700	4000	4300	4700	5500	6000
h4 - Mast extended height mm	4184	4484	4784	5116	5484	6356	6916
Residual capacity at max height kg	2500	2500	2500	2500	2500		
Height at max capacity mm	3400	3700	4000	4300	4700	2500	2500

Full Visibility Triplex (FVT)	FVT 33
α - Mast/fork carriage tilt, forward °	10
β - Mast/fork carriage tilt, backward °	12
h1 - Mast lowered height mm	1826
h2 - Mast free lift mm	72
h3 - Mast lifting height mm	3300
h4 - Mast extended height mm	4027
Height at max capacity mm	2500



# **MANITOU** HANDLING YOUR WORLD

## Head Office

B.P. 249 - 430 rue de l'Aubinière  
44150 Ancenis Cedex - France  
Tel: +33 (0)2 40 09 10 11 - Fax: +33 (0)2 40 09 10 97  
[www.manitou.com](http://www.manitou.com)



This publication provides a description of the configuration versions and options for Manitou products, which may differ for equipment. The equipment presented in this brochure may be part of a series, as an option, or it may not be available, depending on the versions. Manitou reserves the right, at any time and without notice, to amend the specifications described and represented. The specifications provided do not bind the manufacturer. For more details, please contact your Manitou agent. This is not a contractually binding document. The presentation of the products is not contractually binding. List of specifications non-exhaustive. The logos as well as the visual identity of the company are owned by Manitou and cannot be used without authorisation. All rights reserved. The photos and diagrams contained in this brochure are only provided for consultation and information purposes.

MANITOU BF SA - Limited company with board of directors - Share capital: 39,668,399 euros - 857 802 508 RCS Nantes