Technical sheet:

MT 1440 A ST5







	MT 1440 A STS Created on November 1, 2025 at 1:38 PM L
Capacities	Metric
Max. capacity	4000 kg
Max. lifting height	13.53 m
Maximum outreach	9.46 m
Breakout force with bucket	7916 daN
Weight and dimensions	
Overall length to carriage	l11 6.02 m
Length to face of forks	12 6.13 m
Overall width	b1 2.36 m
Overall height	h17 2.45 m
Wheelbase	
	•
Ground clearance	m4 0.37 m
Overall cab width	b4 0.89 m
Tilt-up angle	a4 12 °
Tilt-down angle	a5 114°
External turning radius (over tyres)	Wa1 3.94 m
Overall weight	11200 kg
Unladen weight (with man basket)	11620 kg
Tires type	Inflatable
Standard tires	Alliance 400/80 - 24 - 162A8
Forks length / width / section	I / e / s 1200 mm x 125 mm x 45 mm
Performances	
Lifting	16 s
Lowering	14 s
Extension	19.30 s
Scoop	4 s
Dump	4 \$
Engine	
Engine brand	Deutz
Engine norm	Stage V
Engine model	TCD 3.6L
Number of cylinders / Capacity of cylinders	4 - 3621 cm³
Engine power (Hp/kW)	100 Hp / 75 kW
Max. torque / Engine rotation	410 Nm @ 1600 rpm
Drawbar pull (Laden)	9930 daN
Transmission	7750 daix
Transmission type	Torque converter
Number of gears (forward / reverse)	4 / 4
	24.90 km/h
Max. travel speed	
Parking brake	Automatic parking brake
Service brake	Oil-immersed multi-discs braking on front & rea axles
Hydraulics	unio unio unio unio unio unio unio unio
Hydraulic pump type	Gear pump
Hydraulic flow / Pressure	167 l/min-270 bar
Tank capacities	107 ymm 270 Ddi
Engine oil	10
Engine oil Hydraulic oil	1351
Diesel Exhaust fluid (AdBlue® type)	22.60
Fuel Naise and sibration	140 l
Noise and vibration	70.10
Noise at driving position (LpA)	79 dB
Noise to environment (LwA)	106 dB
Vibration on hands/arms	< 2.50 m/s²
Compatible platform	
Platform capacity	Q 1000 kg
Number of people	3
Platform dimensions (length x width)	lp / ep 5000 mm x 1200 mm
Platform weight*	1150 kg
Miscellaneous	
Steering wheels (front / rear)	2/2
Drive wheels (front / rear)	2/2
Cab certification	Cabin ROPS - FOPS level 2
Controls	JSM

MT 1440 A ST5 - Dimensional drawing









MT 1440 A ST5 - Load chart


Machine on tires with forks - with levelling device Metric

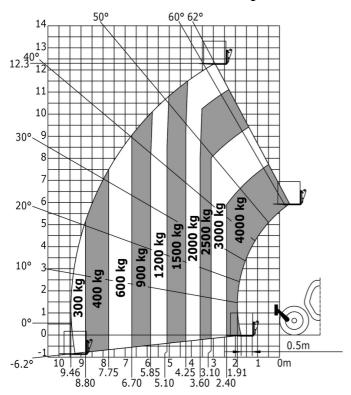

Machine on lowered stabilisers with forks Metric

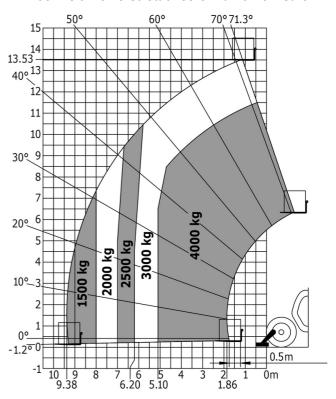

Machine on stabilisers with Man basket Metric

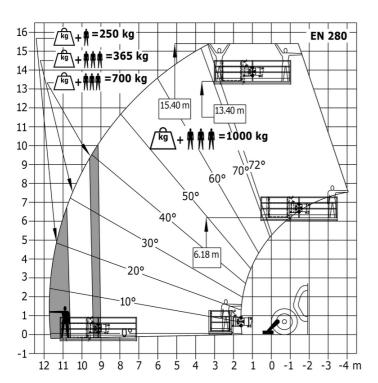





Head Office

B.P. 249 - 430 rue de l'Aubinière 44150 Ancenis Cedex - France Tel: +33 (0)2 40 09 10 11 - Fax: +33 (0)2 40 09 10 97 www.manitou.com



This publication provides a description of the configuration versions and options for Manitou products, which may differ for equipment. The equipment presented in this brochure may be part of a series, as an option, or it may not be available, depending on the versions. Manitou reserves the right, at any time and without notice, to amend the specifications described and represented. The specifications provided do not bind the manufacturer. For more details, please contact your Manitou agent. This is not a contractually binding document. The presentation of the products is not contractually binding. List of specifications non-exhaustive. The logos as well as the visual identity of the company are owned by Manitou and cannot be used without authorisation. All rights reserved. The photos and diagrams contained in this brochure are only provided for consultation and information purposes.

MANITOU BF SA - Limited company with board of directors - Share capital: 39,668,399 euros - 857 802 508 RCS Nantes