Technical sheet:

# MT 930 H







	MT 930 H Created on November 4, 2025 at 2:55 PM
Capacities	Metric
Max. capacity	3000 kg
Max. lifting height	8.85 m
Maximum outreach	6.05 m
Weight and dimensions	
Overall length to carriage	l11 4.67 m
Overall length (with forks)	I1 5.77 m
Overall width	b1 1.99 m
Overall height	h17 1.99 m
Wheelbase	y 2.69 m
Ground clearance	m4 0.35 m
Overall cab width	b4 0.79 m
Tilt-up angle	a4 11 °
Tilt-down angle	a5 116°
External turning radius (over tyres)	Wa1 3.35 m
Unladen weight (with forks)	6550 kg
	6550 kg
Overall weight	Inflatable
Tires type Standard tires	
	Alliance - 380/75 R20 148A8 A580
Forks length / width / section	I / e / s 1070 mm x 100 mm x 50 mm
Performances	1004
Lifting	10.24 s
Lowering	7.95 s
Extension	9.89 s
Retraction	9.48 s
Crowd	3.06 s
Dump	2.44 s
Engine	
Engine brand	Kubota
Engine norm	Stage V
Engine model	V3307-CR-T-EW05
Number of cylinders / Capacity of cylinders	4 - 3331 cm³
Engine power (Hp/kW)	75 Hp / 54.60 kW
Max. torque / Engine rotation	263 Nm @ 1400 rpm
Drawbar pull (Laden)	3860 daN
Transmission	
Transmission type	Hydrostatic
Number of gears (forward / reverse)	2/2
Max. travel speed	24.90 km/h
Service brake	Hydraulic
Hydraulics	
Hydraulic pump type	Gear pump
Hydraulic flow / Pressure	88 l/min-245 bar
Tank capacities	
Engine oil	111
Hydraulic oil	1151
Fuel	90 I
Noise and vibration	
Noise at driving position (LpA)	74 dB
Noise to environment (LwA)	103 dB
Vibration on hands/arms	< 2.50 m/s²
Miscellaneous	- 2.00 m/s
Steering wheels (front / rear)	2/2
Cab certification	Cabin ROPS - FOPS level 2
oab cerancaadii	Capili rors - rors level z

## MT 930 H - Dimensional drawing








### MT 930 H - Load chart

#### Machine on tires with forks Metric

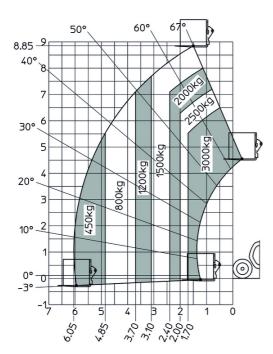





#### **Head Office**

B.P. 249 - 430 rue de l'Aubinière 44150 Ancenis Cedex - France Tel: +33 (0)2 40 09 10 11 - Fax: +33 (0)2 40 09 10 97 www.manitou.com



This publication provides a description of the configuration versions and options for Manitou products, which may differ for equipment. The equipment presented in this brochure may be part of a series, as an option, or it may not be available, depending on the versions. Manitou reserves the right, at any time and without notice, to amend the specifications described and represented. The specifications provided do not bind the manufacturer. For more details, please contact your Manitou agent. This is not a contractually binding document. The presentation of the products is not contractually binding. List of specifications non-exhaustive. The logos as well as the visual identity of the company are owned by Manitou and cannot be used without authorisation. All rights reserved. The photos and diagrams contained in this brochure are only provided for consultation and information purposes.

MANITOU BF SA - Limited company with board of directors - Share capital: 39,668,399 euros - 857 802 508 RCS Nantes