Technical sheet:


MTA 6642 E74






Capacities		Imperial
Max. capacity		6601 lb
Max. lifting height		42 ft
Maximum outreach		28 ft 3 in
Veight and dimensions		
Overall length to carriage	l11	19 ft 1 in
Overall width	b1	8 ft 2 in
Overall height	h17	7 ft 8 in
/heelbase	у	9 ft 11 in
round clearance	m4	16 in
verall cab width	b4	33 in
ïlt-up angle	a4	12 °
ilt-down angle	a5	112 °
xternal turning radius	Wa3	13 ft 9 in
Inladen weight (with forks)		22002 lb
ires type		Inflatable
tandard tires		13 x 24
orks length / width / section	I/e/s	47 in x 5 in x 2 in
erformances	1,70,0	
ifting		11 s
owering		8 s
xtension		14 s
etraction		12 s
rowd		7 s
Dump		4 s
ingine		4.0
ngine brand		Deutz
ngine norm		Stage IV, Tier 4 final
ngine model		TCD 3.6 L4
lumber of cylinders / Capacity of cylinders		4 - 0.23 in ³
ingine power (Hp/kW)		74 Hp / 55 kW
Max. torque / Engine rotation		288 ft/lbs @ 1300 rpm
ransmission		200 Tribs (# 1300 Ipili
ransmission type		Torque converter with powershift gearbox
lumber of gears (forward / reverse)		4 / 3
fax. travel speed		4 / 3 15 mph
arking brake		Hydraulic spring release SAHR
ervice brake		Wet disc brakes
		Dana
xle Manufacturer		Dalla
lydraulics		Connection
ydraulic pump type		Gear pump
lydraulic flow / Pressure		41 US gpm-3002 PSI
ank capacities		41101
ingine oil		4 US gal
lydraulic oil		45 US gal
uel		47 US gal
liscellaneous		
teering wheels (front / rear)		2 / 2
		2 / 2
urive wheels (front / rear) Cab certification		ROPS/FOPS

MTA 6642 E74 - Dimensional drawing

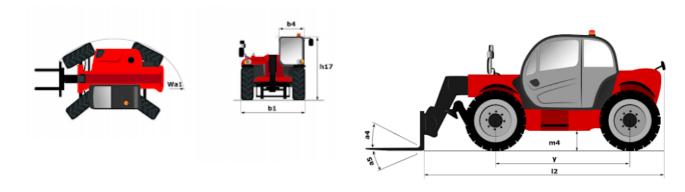

MTA 6642 E74 - Load chart

Machine on tires with forks Imperial

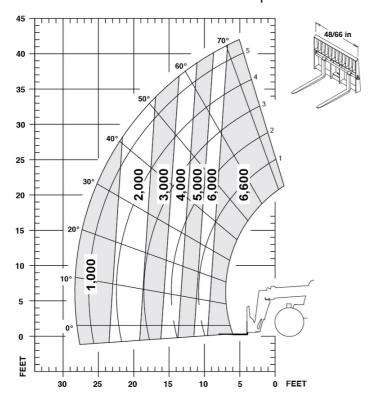





Head Office

B.P. 249 - 430 rue de l'Aubinière 44150 Ancenis Cedex - France Tel: +33 (0)2 40 09 10 11 - Fax: +33 (0)2 40 09 10 97 www.manitou.com



This publication provides a description of the configuration versions and options for Manitou products, which may differ for equipment. The equipment presented in this brochure may be part of a series, as an option, or it may not be available, depending on the versions. Manitou reserves the right, at any time and without notice, to amend the specifications described and represented. The specifications provided do not bind the manufacturer. For more details, please contact your Manitou agent. This is not a contractually binding document. The presentation of the products is not contractually binding. List of specifications non-exhaustive. The logos as well as the visual identity of the company are owned by Manitou and cannot be used without authorisation. All rights reserved. The photos and diagrams contained in this brochure are only provided for consultation and information purposes.

MANITOU BF SA - Limited company with board of directors - Share capital: 39,668,399 euros - 857 802 508 RCS Nantes