


# V210 - NEW

# SKID LOADERS



# GEHL®

| Kapazität                                        |     | Metrisch          |
|--------------------------------------------------|-----|-------------------|
| Operating Capacity At 50% Tipping Load           |     | 952.54 kg         |
| Operating Weight                                 |     | 3393 kg           |
| Eigengewicht                                     |     | 3045 kg           |
| Tipping capacity                                 |     | 1905 kg           |
| Gewicht und Abmessungen                          |     |                   |
| Operating Weight - Approximate                   |     | 3393 kg           |
| Overall Operating Height - Fully Raised          | h27 | 4013 mm           |
| Höhe bis Schaufeldrehpunkt – bei max. Hubhöhe    | h28 | 3061 mm           |
| Overall Height to top of ROPS                    | h17 | 2032 mm           |
| Auskippwinkel bei voller Hubhöhe                 | a5  | 42 °              |
| Dump height                                      | h29 | 2286 mm           |
| Overall length with bucket                       | l16 | 3543 mm           |
| Dump reach - Full height                         | r6  | 851 mm            |
| Rückrollwinkel bei voller Hubhöhe                | a4  | 92 °              |
| Seat to ground height                            | h30 | 952.50 mm         |
| Overall width less bucket                        | b1  | 1623 mm           |
| Bodenfreiheit der Maschine                       | m4  | 178 mm            |
| Overall length - Less Bucket                     | l2  | 2743 mm           |
| Clearance Radius - Front with Bucket             | b18 | 2146 mm           |
| Clearance Circle - Rear                          | wa1 | 1664 mm           |
| Leistung                                         |     |                   |
| Travel Speed with Two-Speed Option - Maximum     |     | 18.70 km/h        |
| Fahrtgeschwindigkeit (unbeladen)                 |     | 12.10 km/h        |
| Motor                                            |     |                   |
| Marke                                            |     | Yanmar            |
| Motor Modell                                     |     | 4TNV98C-NGL       |
| Motornorm                                        |     | Stage V, Tier 4   |
| Gross Power                                      |     | 52.70 kW          |
| Net Power                                        |     | 51.70 kW          |
| Max. Drehmoment / Motordrehzahl                  |     | 241 Nm / 1625 rpm |
| Antriebsart                                      |     | Diesel            |
| Anzahl der Zylinder                              |     | 4                 |
| Kühlsystem des Motors                            |     | Wasser            |
| Batterie                                         |     | 12 V              |
| Alternator - Ampere                              |     | 100 A             |
| Starter                                          |     | 3 kW              |
| Hydraulisch                                      |     |                   |
| Zusatzhydraulik                                  |     | 86.50 l/min       |
| Auxiliary Hydraulic Pressure                     |     | 239.59 bar        |
| High-Flow Auxiliary Hydraulics – Option          |     | 114 l/min         |
| High-Flow Auxiliary Hydraulics Pressure – Option |     | 229.25 bar        |
| Tankkapazität                                    |     |                   |
| Kapazität des Kraftstoffbehälters                |     | 106 l             |
| Reservoir Capacity Hydraulics                    |     | 22.70 l           |
| Hubraum                                          |     | 3.30 l            |

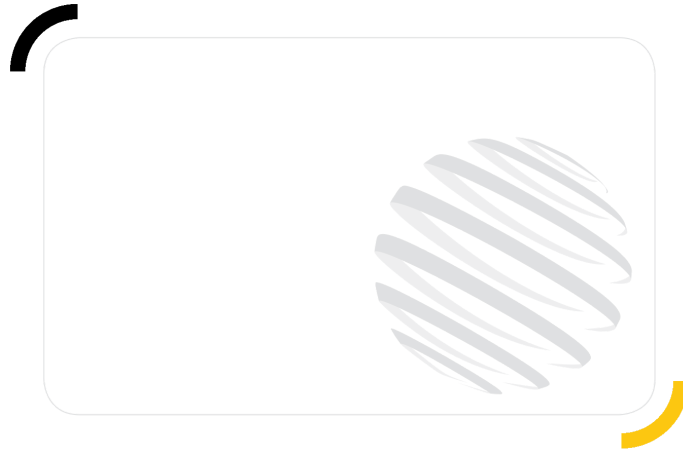

# GEHL®

Siège Social  
P.O. Box 179 - One Gehl Way - West Bend, WI, USA 53095  
Tel: (262) 334-9461 - Fax: (262) 338-7517  
[www.gehl.com](http://www.gehl.com)



This brochure describes versions and configuration options for Gehl products which may be fitted with different equipment. The equipment described in this brochure may be standard, optional or not available depending on version. Gehl reserves the right to change the specifications shown and described at any time and without prior warning. The manufacturer is not liable for the specifications given. For more information, contact your Gehl dealer. Non-contractual document. Product descriptions may differ from actual products. List of specifications is not comprehensive. The logos and visual identity of the company are the property of Gehl and may not be used without authorization. All rights reserved. The photos and diagrams contained in this brochure are provided for information only.

MANITOU EQUIPMENT AMERICAS, LLC - Limited company with board of directors - Share capital: 39,668,399 euros - 857 802 508 RCS West Bend