Technical sheet:

## **2300VT**







	<b>2300VT</b> Created on November 1, 2025 at	<b>2300VT</b> Created on November 1, 2025 at 8:30 AM UTC	
Capacities	Metric		
Rated Operating Capacity	1043.26 kg		
Operating Capacity At 50% Tipping Load	1490.50 kg		
Rated Operating Capacity with Optional Counterweight	1088.62 kg		
Operating Weight	4169 kg		
Unladen weight	3817 kg		
Weight and dimensions			
Overall Operating Height - Fully Raised	h27 4026 mm		
Height to Hinge Pin - Fully Raised	h28 3073 mm		
Overall Height to top of ROPS	h17 2045 mm		
Dump angle at full height	a5 42 °		
Dump height	h29 2300 mm		
Overall length with bucket	I16 3589 mm		
Dump reach - Full height	r6 927 mm		
Rollback Angle at Full Height	a4 92 °		
Seat to ground height	h30 965 mm		
Overall width less bucket	b1 1676 mm		
Ground clearance	m4 191 mm		
Overall length - Less Bucket	l2 2789 mm		
Clearance Radius - Front with Bucket	b18 2235 mm		
Performances			
Travel speed (unladen)	10.30 km/h		
Travel Speed with Two-Speed Option - Maximum	15.30 km/h		
Wheels			
Transmission type	Hydrostatic		
Engine	,		
Engine brand	Yanmar		
Engine model	4TNV98CT-XNGL		
Engine norm	Stage V		
Max. torque / Engine rotation	294 Nm / 1800 rpm		
Power source	Diesel		
Number of cylinders	4		
Engine power (Hp / kW)	72 Hp / 52.70 kW		
Engine cooling system	Water		
Battery voltage	12 V		
Alternator - Ampere	100 A		
Starter	3 kW		
Hydraulics			
Standard flow - Auxiliary hydraulics	86.50 l/min		
Auxiliary Hydraulic Pressure	239.59 bar		
High-Flow Auxiliary Hydraulics - Option	114 l/min		
High-Flow Auxiliary Hydraulics Pressure - Option	229.25 bar		
Tank capacities			
Fuel	144		
Hydraulic tank capacity	22.70		
Displacement	3.301		
Liquid cooling tank volume	18 I		
Enquire cooming tank forallic	101		

## 2300VT - Dimensional drawing







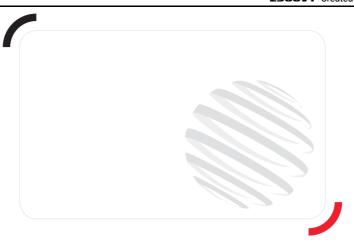



## **Head Office**

B.P. 249 - 430 rue de l'Aubinière 44150 Ancenis Cedex - France Tel: +33 (0)2 40 09 10 11 - Fax: +33 (0)2 40 09 10 97 www.manitou.com



This publication provides a description of the configuration versions and options for Manitou products, which may differ for equipment. The equipment presented in this brochure may be part of a series, as an option, or it may not be available, depending on the versions. Manitou reserves the right, at any time and without notice, to amend the specifications described and represented. The specifications provided do not bind the manufacturer. For more details, please contact your Manitou agent. This is not a contractually binding document. The presentation of the products is not contractually binding. List of specifications non-exhaustive. The logos as well as the visual identity of the company are owned by Manitou and cannot be used without authorisation. All rights reserved. The photos and diagrams contained in this brochure are only provided for consultation and information purposes.

MANITOU BF SA - Limited company with board of directors - Share capital: 39,668,399 euros - 857 802 508 RCS Nantes