RT165

TRACK LOADERS



GEHL.

Capacities		
Operating Weight		
Operating Capacity at 35% Tipping Load		
Operating Capacity At 50% Tipping Load		
Tipping capacity		
Weight and dimensions		
Overall Operating Height - Fully Raised	h27	
Height to Hinge Pin – Fully Raised	h28	
Reach - Fully Raised	dp1	
Dump angle at full height	a5	
Dump Height - Fully Raised	h29	
Maximum Rollback Angle - Fully Raised	a4	
Overall Height to top of ROPS	h17	
Overall length with bucket	l16	
Overall Length without Bucket	11	
Specified Height	h31	
Reach at Specified Height	r4	
Dump angle at specified height	a17	
Maximum Rollback Angle at Ground	a13	
Carry Position	d5	
Maximum Rollback Angle at Carry Position	a14	
Digging Position	h32	
Ground clearance	m4	
Track gauge	b10	
Track Shoe Width	b20	
Crawler base	y2	
Overall width less bucket	b1	
Bucket Width	e1	
Clearance Radius - Front with Bucket	b18	
Clearance Circle - Rear	wa1	
Track Type / Track Rollers / Roller Type		
Performances		
Ground Speed - Single Speed		
Drawbar Pull/Tractive Effort		
Bucket Breakout - Tilt Cylinder		
Bucket Breakout - Lift Cylinder		
Engine		
Engine brand		
Engine model		
Motor Type		
Gross Power / Power		
Battery voltage		
Cold Cranking Amps at Temperature (CCA)		
Alternator - Voltage / Ampere		
Hydraulics		
Standard flow - Auxiliary hydraulics		
Tank capacities		
Oil Pan Capacity		
Hydraulic tank capacity		
Fuel tank		
Displacement / Number of cylinders		

RT165 Created on 6 May 2024 at 19.16.54 UTC

Metric

3638 kg

748 kg

1069 kg

2139 kg

4008 mm 3038 mm

641 mm

39 °

2329 mm

98 °

1969 mm

3205 mm

2393 mm

1638 mm

559 mm

70 ° 28 °

198 mm

28 °

53 mm

185 mm

1407 mm

400 mm

1265 mm 1727 mm

1676 mm

1979 mm

1440 mm

Rubber / 4 / Steel

10.50 km/h

4345 kg 1919 kg

2295 kg

Yanmar 4TNV98C-NMS2V

Radial Piston

51.70 kW @ 2500 rpm

12 V

950 A


112 V / 100 A

71 l/min

9 l

39 l 62.50 l

3.30l/4

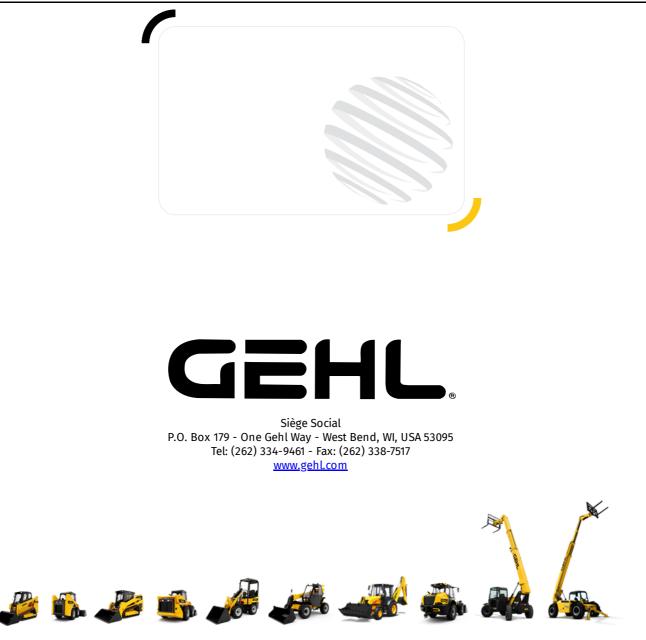

This brochure describes versions and configuration options for Gehl products which may be fitted with different equipment. The equipment described in this brochure may be standard, optional or not available depending on version. Gehl reserves the right to change the specifications shown and described at any time and without prior warning. The manufacturer is not liable for the specifications given. For more information, contact your Gehl dealer. Non-contractual document. Product descriptions may differ from actual products. List of specifications is not comprehensive. The logos and visual identity of the company are the property of Gehl and may not be used without authorization. All rights reserved. The photos and diagrams contained in this brochure are provided for information only.

MANITOU EQUIPMENT AMERICAS, LLC - Limited company with board of directors - Share capital: 39,668,399 euros - 857 802 508 RCS West Bend