RT185

TRACK LOADERS






	killes Elsterre	l ui
Capacities		
Operating Weight		
Operating Capacity at 35% Tipping Load		
Operating Capacity At 50% Tipping Load		
Tipping capacity		
Weight and dimensions		
Overall Operating Height - Fully Raised	h27	
Height to Hinge Pin – Fully Raised	h28	
Reach - Fully Raised	dp1	
Dump angle at full height	a5	
Dump Height - Fully Raised	h29	
Overall Height to top of ROPS	h17	
Overall length with bucket	l16	
Overall Length without Bucket	l1	
Specified Height	h31	
Reach at Specified Height	r4	
Dump angle at specified height	a17	
Maximum Rollback Angle at Ground	a13	
Carry Position	d5	
Maximum Rollback Angle at Carry Position	a14	
Digging Position	h32	
Angle of Departure with STD Counterweight		
Ground clearance	m4	
Track gauge	b10	
Track Shoe Width	b20	
Crawler base	y2	
Overall width less bucket	b1	
Bucket Width	e1	
Clearance Radius - Front with Bucket	b18	
Clearance Circle - Rear	wa1	
Track Type / Track Rollers / Roller Type		
Performances		
Ground Speed - Single Speed		
Drawbar Pull/Tractive Effort		
Bucket Breakout - Tilt Cylinder		
Bucket Breakout - Lift Cylinder		
Engine		
Engine brand		
Engine model		
Motor Type	A	xel P
Gross Power / Power		
Battery voltage		
Cold Cranking Amps at Temperature (CCA)		
Alternator - Voltage / Ampere		
Hydraulics		
Standard flow - Auxiliary hydraulics		
Tank capacities		
Hydraulic tank capacity		
Hydraulic tank capacity Fuel tank		

RT185 Erstellt am 4. Mai 2024 um 20:28:16 UTC

Metrisch

methoen
4128 kg
839 kg
1199 kg
2398 kg
4267 mm
3251 mm
876 mm
40.20 °
2489 mm
2103 mm
3754 mm
2921 mm
1715 mm
790 mm
66.80 °
30 °
208 mm
31.60 °
23 mm
30.40 °
318 mm
1313 mm
320 mm
1382 mm
1636 mm
1674 mm
2322 mm
1666 mm
Rubber / 4 / Steel
9.50 km/h
4635 kg
2429 kg
2275 kg
Yanmar
4TNV98CT-XNMSV
Axel Piston with planetary gear box reduction
51.70 kW @ 2500 rpm
12 V
850 A
14 V / 100 A
70 l/min
41.60 l

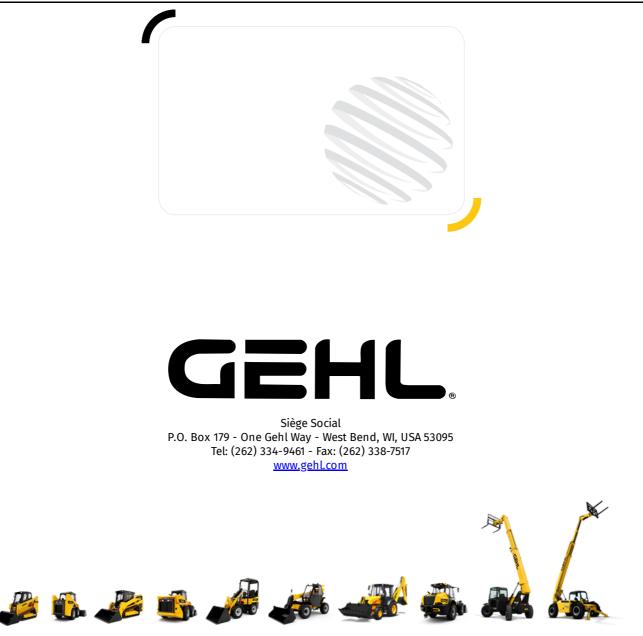

This brochure describes versions and configuration options for Gehl products which may be fitted with different equipment. The equipment described in this brochure may be standard, optional or not available depending on version. Gehl reserves the right to change the specifications shown and described at any time and without prior warning. The manufacturer is not liable for the specifications given. For more information, contact your Gehl dealer. Non-contractual document. Product descriptions may differ from actual products. List of specifications is not comprehensive. The logos and visual identity of the company are the property of Gehl and may not be used without authorization. All rights reserved. The photos and diagrams contained in this brochure are provided for information only.

MANITOU EQUIPMENT AMERICAS, LLC - Limited company with board of directors - Share capital: 39,668,399 euros - 857 802 508 RCS West Bend