## RT185

## **TRACK LOADERS**






Capacities		
Operating Weight		
Operating Capacity at 35% Tipping Load		
Operating Capacity At 50% Tipping Load		
Tipping capacity		
Weight and dimensions		
Overall Operating Height - Fully Raised	h27	
Height to Hinge Pin – Fully Raised	h28	
Reach - Fully Raised	dp1	
Dump angle at full height	a5	
Dump Height - Fully Raised	h29	
Overall Height to top of ROPS	h17	
Overall length with bucket	l16	
Overall Length without Bucket	11	
Specified Height	h31	
Reach at Specified Height	r4	
Dump angle at specified height	a17	
Maximum Rollback Angle at Ground	a13	
Carry Position	d5	
Maximum Rollback Angle at Carry Position	a14	
Digging Position	h32	
Angle of Departure with STD Counterweight	1152	
Ground clearance	m4	
Track gauge	b10	
Track Shoe Width	b20	
Crawler base	y2	
Overall width less bucket	b1	
Bucket Width	e1	
Clearance Radius - Front with Bucket	b18	
Clearance Circle - Rear	wa1	
Track Type / Track Rollers / Roller Type	Wai	
Performances		
Ground Speed - Single Speed		
Drawbar Pull/Tractive Effort		
Bucket Breakout - Tilt Cylinder		
Bucket Breakout - Lift Cylinder Engine		
<b>.</b>		
Engine brand		
Engine model		
Motor Type		A
Gross Power / Power		
Battery voltage		
Cold Cranking Amps at Temperature (CCA)		
Alternator - Voltage / Ampere		
Hydraulics		
Standard flow - Auxiliary hydraulics		
Tank capacities		
Hydraulic tank capacity		
Fueltank		

T185	Created	on 8	May	2024	at	7:15:10	am	UTC	
------	---------	------	-----	------	----	---------	----	-----	--

R

0.04	
	Metric
	4128 kg
	839 kg
	1199 kg
	2398 kg
	u u u u u u u u u u u u u u u u u u u
27	4267 mm
28	3251 mm
)1	876 mm
5	40.20 °
.9	2489 mm
7	2103 mm
6	3754 mm
1	2921 mm
81	1715 mm
÷	790 mm
7	66.80 °
3	30 °
5	208 mm
4	31.60 °
32	23 mm
	30.40 °
4	318 mm
10	1313 mm
20	320 mm
2	1382 mm
1	1636 mm
1	1674 mm
18	2322 mm
a1	1666 mm
	Rubber / 4 / Steel
	9.50 km/h
	4635 kg
	2429 kg
	2275 kg
	Yanmar
	4TNV98CT-XNMSV
	Axel Piston with planetary gear box reduction
	51.70 kW @ 2500 rpm
	12 V
	850 A
	14 V / 100 A
	701/
	70 l/min
	(10)
	41.60 l
	91 L
	3.311/4

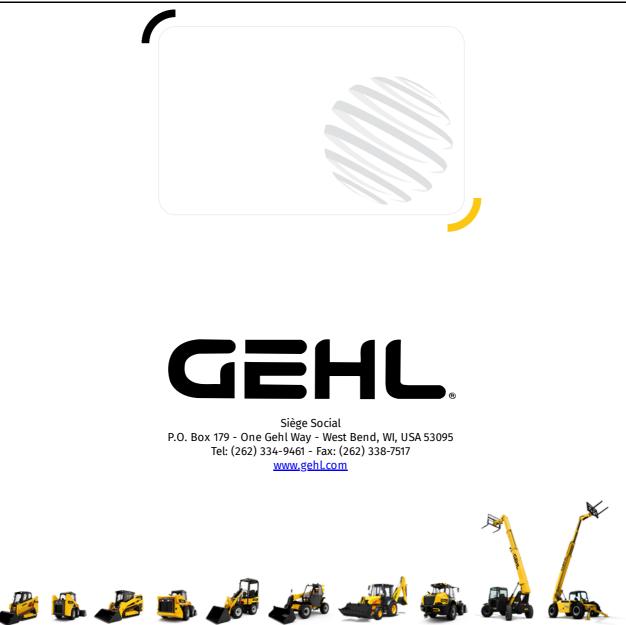

This brochure describes versions and configuration options for Gehl products which may be fitted with different equipment. The equipment described in this brochure may be standard, optional or not available depending on version. Gehl reserves the right to change the specifications shown and described at any time and without prior warning. The manufacturer is not liable for the specifications given. For more information, contact your Gehl dealer. Non-contractual document. Product descriptions may differ from actual products. List of specifications is not comprehensive. The logos and visual identity of the company are the property of Gehl and may not be used without authorization. All rights reserved. The photos and diagrams contained in this brochure are provided for information only.

MANITOU EQUIPMENT AMERICAS, LLC - Limited company with board of directors - Share capital: 39,668,399 euros - 857 802 508 RCS West Bend