RT185

TRACK LOADERS






Height to Hinge Pin - Fully Raised Boump angle at full height Dump Height To top of ROPS Overall Meight Excert top of ROPS Nump angle at specified Height Aakinum ROIback Angle at Ground Aakinum ROIback Angle at Carry Position Diging Position Ingle of Departure with STD Counterweight Ground Clearance Tack gauge Tack Sauge Tack Sauge Tack Sauge Voerall With Hess bucket Lacarance Aratius - Front with Bucket Laearance Gricle - Rear Track Type / Track Rollers / Roller Type Verformances Ground Speed - Single Speed <t< th=""><th></th><th></th></t<>		
Operating Capacity At 35% Tipping Load Image: Capacity At 55% Tipping Load Image:		
Operating Capacity At 50% Tipping Load I Veight and dimensions I Veight and dimensions I Verall to perating height - Fully Raised I Verall to perating height - Fully Raised I Verall to perating height - Fully Raised I Dump angle at full height I Dump Height - Fully Raised I Durp Height To top of ROPS I Dverall Length without Bucket I Durp angle at specified height I Durp angle at specified height I Aaximum Rollback Angle at Ground I arary Position I Aaximum Rollback Angle at Carry Position I Diging Position I rack Sauge I		
ipping capacity Weight and dimensions Overall Operating Height - Fully Raised teach - Fully Raised teach - Fully Raised Dump Height - Fully Raised Dump Height - Fully Raised Dump Height - Fully Raised Dverall Height to top of ROPS Overall Length with bucket Overall Length with bucket Overall Length with bucket Overall Aspecified Height Aaximum Rollback Angle at Ground Aray Position Maging Position Nagel of Departure with SDD Counterweight Ground Clearance Tack Sauge Tack Type / Tack Rollers / Roller Type Performances Tack Type / Tack Rollers / Roller Type Performances Targel – Single Speed		
Weight and dimensions Dyerall Operating Height 1- Fully Raised leight to Hinge Pin - Fully Raised Dump angle at full height Dureall Height to top of ROPS Dyerall Length with bucket Dyerall Length without Bucket Dyerall at specified height Dump angle at specified height Aaximum Rollback Angle at Ground Aaximum Rollback Angle at Carry Position Aging Position Ingige of Departure with STD Counterweight Ground Clearance Tack Sage Ack Shoe Width Itararce Radius - Front with Bucket Bearance Arcle - Rear Irack Shoe Pull/Tractive Effort Bearance Circle - Rear Ground Speed - Single Speed Single Spead Single Spead Single Spead Single Spea		
Dverall Operating Height - Fully Raised Image: Section		
Height to Hinge Pin - Fully Raised Image: Section - Fully Raised Dump Height To Hup Raised Image: Section - Fully Raised Dverall Height to top of ROPS Image: Section - Fully Raised Dverall Height to top of ROPS Image: Section - Fully Raised Dverall Height to top of ROPS Image: Section - Fully Raised Dverall Height to top of ROPS Image: Section - Fully Raised Dverall Height With bucket Image: Section - Fully Raised - Section - Fully Fully Fully Raised - Fully Raised - Section - Fully Raised - Fully Raised - Fully Raised - Fully Raised - Section - Full		
Reach - Fully Raised Image: Sect: Sect	h27	
bump angle at full height Jump Height - Fully Raised Dverall Height to top of ROPS Dverall Length with bucket Specified Height Leach at Specified Height Dump angle at specified height Aaximum Rollback Angle at Ground Carry Position Aaximum Rollback Angle at Carry Position Digging Position Carry Position Aaximum Rollback Angle at Carry Position Digging Position Carry	h28	
bump Height - Fully Raised Verall Height to top of ROPS Verall Height to top of ROPS Verall Length with bucket Overall Length with bucket Overall Length with bucket Specified Height Reach at Specified Height Caary Position Height Caary Position Caary Power Caary Powe	dp1	
Dverall Height to top of ROPS	a5	
Dverall length with bucket Dverall Length without Bucket Dverall Length without Bucket Specified Height Acarimum Rollback Angle at Ground Carry Position Aaximum Rollback Angle at Carry Position Digging Position Angle of Departure with STD Counterweight Ground Clearance Track gauge Track Shoe Width Learance Radius - Front with Bucket Learance Radius - Front with Bucket Learance Radius - Front with Bucket Drawbar Pull/Tractive Effort Backet Breakout - Lift Cylinder Backet Breakout - Lift Cylinder Bargine Drand Bargine Drand Bargine Drand Bargine Brand Bargine Drand Bargine Drand Bargine Drand Bargine Drand Bargine	h29	
Dverall Length without Bucket specified Height Reach at Specified Height Dump angle at specified height Aaximum Rollback Angle at Ground Carry Position Aaximum Rollback Angle at Ground Carry Position Digging Position Angle of Departure with STD Counterweight Ground clearance Track Sauge Track Shoe Width Sauket Width Bearance Radius - Front with Bucket Clearance Circle - Rear Track Type / Track Rollers / Roller Type Performances Bround Speed - Single Speed Drawbar Pull/Tractive Effort Bucket Breakout - Lift Cylinder Sucket Breakout - Lift Cylinder Singine brand Singine brand Singine brand Singine brand Singine brand Singine brand Singine prover / Power	h17	
specified Height teach at Specified Height Aaximum Rollback Angle at Ground Carry Position Aaximum Rollback Angle at Carry Position Digging Position Angle of Departure with STD Counterweight Ground Clearance Track Space Track Space Dyerall width less bucket Bucket Width Clearance Circle - Rear Track Speed - Single Speed Drawbar Pull/Tractive Effort Bucket Breakout - Lift Cylinder Bucket Breakout - Lift Cylinder Burgen and Ingine brand Ingine brand Stors Power / Power	l16	
Reach at Specified Height Image: Appecified Height Aaximum Rollback Angle at Ground Image: Appecified Height Aaximum Rollback Angle at Ground Image: Appecified Height Aaximum Rollback Angle at Garup Position Image: Appecified Height Digging Position Image: Appecified Height Aaximum Rollback Angle at Carup Position Image: Appecified Height Digging Position Image: Appecified Height Angle of Departure with STD Counterweight Image: Appecified Height Foround Clearance Image: Appecified Height Track gauge Image: Appecified Height Track Shoe Width Image: Appecified Height Crawler base Image: Appecified Height Dyerall width less bucket Image: Appecified Height Clearance Circle - Rear Image: Appecified Height Tack Type / Track Rollers / Roller Type Image: Appecified Height Pareformances Image: Appecified Height Ground Speed - Single Speed Image: Appecified Height Drawbar Pull/Tractive Effort Image: Appecified Height Bucket Breakout - Lift Cylinder Image: Appecified Height Image: Appecified Height Image: Appecified Height Autort	11	
Reach at Specified Height Image: Appecified Height Aaximum Rollback Angle at Ground Image: Appecified Height Aaximum Rollback Angle at Ground Image: Appecified Height Aaximum Rollback Angle at Garup Position Image: Appecified Height Digging Position Image: Appecified Height Aaximum Rollback Angle at Carup Position Image: Appecified Height Digging Position Image: Appecified Height Angle of Departure with STD Counterweight Image: Appecified Height Foround Clearance Image: Appecified Height Track gauge Image: Appecified Height Track Shoe Width Image: Appecified Height Crawler base Image: Appecified Height Dyerall width less bucket Image: Appecified Height Clearance Circle - Rear Image: Appecified Height Tack Type / Track Rollers / Roller Type Image: Appecified Height Pareformances Image: Appecified Height Ground Speed - Single Speed Image: Appecified Height Drawbar Pull/Tractive Effort Image: Appecified Height Bucket Breakout - Lift Cylinder Image: Appecified Height Image: Appecified Height Image: Appecified Height Autort	h31	
bump angle at specified height Aaximum Rollback Angle at Ground Carry Position Aaximum Rollback Angle at Carry Position Digging Position Angle of Departure with STD Counterweight Ground Clearance Track gauge Track Shoe Width Crawler base Dverall width less bucket Bucket Width Clearance Circle - Rear Track Type / Track Rollers / Roller Type Performances Ground Speed - Single Speed Drawbar Pull/Tractive Effort Bucket Breakout - Tilt Cylinder Bucket Breakout - Lift Cylinder Bucket Breakout - Lift Cylinder Ground Clearance Antor Type Grower / Power	r4	
Aaximum Rollback Angle at Ground Carry Position Aaximum Rollback Angle at Carry Position Digging Position Angle of Departure with STD Counterweight Ground clearance Track gauge Track Shoe Width Crawler base Dverall width less bucket Bucket Width Clearance Radius - Front with Bucket Clearance Circle - Rear Track Type / Track Roller Type Performances Ground Speed - Single Speed Drawbar Pull/Tractive Effort Bucket Breakout - Lift Cylinder Bucket Breakout - Lift Cylinder Buck	a17	
Aary Position Image: Angle at Carry Position Aaximum Rollback Angle at Carry Position Image: Angle of Departure with STD Counterweight Arge of Departure with STD Counterweight Image: Angle of Departure with STD Counterweight Ground Clearance Image: Angle of Departure with STD Counterweight Ground Clearance Image: Angle of Departure with STD Counterweight Ground Clearance Image: Angle of Departure with STD Counterweight Ground Clearance Image: Angle of Departure with STD Counterweight Growler Lass Image: Angle of Departure with STD Counterweight Dyerall with less bucket Image: Angle of Departure with StD Counterweight Growler Lass Image: Angle of Departure with StD Counterweight Clearance Radius - Front with Bucket Image: Angle of Counterweight Clearance Circle - Rear Image: Angle of Stolle Speed Grown Speed - Single Speed Image: Angle of Stolle Speed Drawbar Pull/Tractive Effort Image: Angle of Stolle Speed Bucket Breakout - Lift Cylinder Image: Angle of Stolle Speed Bucket Breakout - Lift Cylinder Image: Angle of Stolle Speed Image: Brand Image: Angle of Stolle Speed Angle of Stolle Speed Image: Angle of Stolle Speed <	a13	
Aaximum Rollback Angle at Carry Position Digging Position Angle of Departure with STD Counterweight Ground clearance Track gauge Track Shoe Width Crawler base Dverall width less bucket Bucket Width Clearance Radius - Front with Bucket Clearance Radius - Front with Bucket Clearance Circle - Rear Track Type / Track Rollers / Roller Type Performances Ground Speed - Single Speed Drawbar Pull/Tractive Effort Bucket Breakout - Tilt Cylinder Bucket Breakout - Tilt Cylinder	d5	
bigging Position Angle of Departure with STD Counterweight Ground clearance Track gauge Track Shoe Width Crawler base Deerall width less bucket Bucket Width Clearance Radius - Front with Bucket Clearance Radius - Front with Bucket Clearance Circle - Rear Track Type / Track Rollers / Roller Type Performances Ground Speed - Single Speed Drawbar Pull/Tractive Effort Bucket Breakout - Tilt Cylinder Bucket Breakout - Lift Cylinder Bucket Breakout	a14	
Angle of Departure with STD Counterweight Ground clearance Track gauge Track Shoe Width Crawler base Dverall width less bucket Bucket Width Clearance Radius - Front with Bucket Clearance Radius - Front with Bucket Clearance Circle - Rear Track Type / Track Rollers / Roller Type Performances Ground Speed - Single Speed Drawbar Pull/Tractive Effort Bucket Breakout - Tilt Cylinder Bucket Breakout - Lift Cylinder Bucket Bucket Breakout - Lift Cylinder Bucket Breakout - Lift Cylinder Bucket Breakout - Lift Cylinder Bucket Bucket Bucket Bucket Bucket Bucket Bucket Bucket Bucket Bucket Bucket Bucket Bucket Bucket Bucket Bucket Bucket Bucket Bucket B	h32	
Sround clearance irack gauge irack gauge irack Shoe Width Crawler base Dverall width less bucket Bucket Width Learance Radius - Front with Bucket Clearance Circle - Rear irack Type / Track Rollers / Roller Type Performances Ground Speed - Single Speed Orawbar Pull/Tractive Effort Bucket Breakout - Tilt Cylinder Bucket Breakout - Lift Cylinder Bingine brand Grigine model Ator Type Gross Power / Power		
rack gauge rack gauge rack Shoe Width crawler base Overall width less bucket Bucket Width Clearance Radius - Front with Bucket Clearance Radius - Front with Bucket Clearance Circle - Rear rack Type / Track Rollers / Roller Type Performances Ground Speed - Single Speed Orawbar Pull/Tractive Effort Bucket Breakout - Tilt Cylinder Gingine brand Gingine model Adotor Type Gross Power / Power	m4	
Track Shoe Width Crawler base Dverall width less bucket Bucket Width Clearance Radius - Front with Bucket Clearance Circle - Rear Track Type / Track Rollers / Roller Type Performances Ground Speed - Single Speed Drawbar Pull/Tractive Effort Bucket Breakout - Tilt Cylinder Bucket Breakout - Lift Cylinder Grogne model Adoror Type Gross Power / Power	b10	
Verall width less bucket Bucket Width Clearance Radius - Front with Bucket Clearance Circle - Rear Track Type / Track Rollers / Roller Type Performances Ground Speed - Single Speed Drawbar Pull/Tractive Effort Bucket Breakout - Tilt Cylinder Bucket Breakout - Lift Cylinder Gingine brand Gingine model Adotor Type Gross Power / Power	b20	
Bucket Width Clearance Radius - Front with Bucket Clearance Circle - Rear Track Type / Track Rollers / Roller Type Performances Ground Speed - Single Speed Drawbar Pull/Tractive Effort Bucket Breakout - Tilt Cylinder Bucket Breakout - Lift Cylinder Bucket Breakout - Lift Cylinder Gross Power / Power	y2	
learance Radius - Front with Bucket learance Circle - Rear frack Type / Track Rollers / Roller Type Performances Ground Speed - Single Speed Drawbar Pull/Tractive Effort Bucket Breakout - Tilt Cylinder Bucket Breakout - Lift Cylinder Bucket Breakout - Li	b1	
Clearance Circle - Rear Cirack Type / Track Rollers / Roller Type Performances Ground Speed - Single Speed Drawbar Pull/Tractive Effort Bucket Breakout - Tilt Cylinder Bucket Breakout - Lift Cylinder Bingine Gingine brand Gingine model Motor Type Gross Power / Power	e1	
Track Type / Track Rollers / Roller Type Performances Ground Speed - Single Speed Drawbar Pull/Tractive Effort Bucket Breakout - Tilt Cylinder Bucket Breakout - Lift Cylinder Gross Power / Power	b18	
Track Type / Track Rollers / Roller Type Performances Ground Speed - Single Speed Drawbar Pull/Tractive Effort Bucket Breakout - Tilt Cylinder Bucket Breakout - Lift Cylinder Gross Power / Power	wa1	
Performances Ground Speed - Single Speed Drawbar Pull/Tractive Effort Bucket Breakout - Tilt Cylinder Bucket Breakout - Lift Cyl		
Ground Speed - Single Speed Drawbar Pull/Tractive Effort Bucket Breakout - Tilt Cylinder Bucket Breakout - Lift Cylinder Bigine Bigine Brand Bigine model Motor Type Gross Power / Power		
Drawbar Pull/Tractive Effort Bucket Breakout - Tilt Cylinder Bucket Breakout - Lift Cylinder Bigine brand Bigine model Motor Type Bross Power / Power		
Bucket Breakout - Tilt Cylinder Bucket Breakout - Lift Cylinde		
Bucket Breakout - Lift Cylinder		
ingine brand ingine brand ingine model Aotor Type Gross Power / Power		
ingine brand ingine model Aotor Type Gross Power / Power		
ngine model Aotor Type Gross Power / Power		
Aotor Type Gross Power / Power		
Gross Power / Power		Axel Pist
Battery voltage		
Cold Cranking Amps at Temperature (CCA)		
liternator - Voltage / Ampere		
Indiana Contraction Contra		
itandard flow - Auxiliary hydraulics		
Tank capacities		
Hydraulic tank capacity		
uel tank		
Displacement / Number of cylinders		

RT185 Created on 29 April 2024 at 02:44:15 UTC	-
--	---

	Metric
	4128 kg
	839 kg
	1199 kg
	2398 kg
7	4267 mm
3	3251 mm
1	876 mm
	40.20 °
9	2489 mm
,	2103 mm
	3754 mm
	2921 mm
1	1715 mm
	790 mm
	66.80 °
	30 °
	208 mm
•	31.60 °
2	23 mm
	30.40 °
•	318 mm
)	1313 mm
)	320 mm
	1382 mm
	1636 mm
	1674 mm
3	2322 mm
1	1666 mm
	Rubber / 4 / Steel
	9.50 km/h
	4635 kg
	2429 kg
	2275 kg
	Yanmar
	4TNV98CT-XNMSV
	Axel Piston with planetary gear box reduction
	51.70 kW @ 2500 rpm
	12 V
	850 A
	14 V / 100 A
	70.1/min
	70 l/min
	(1 (0)
	41.60 l 91 l
	3.31L/ 4
	5.511/4

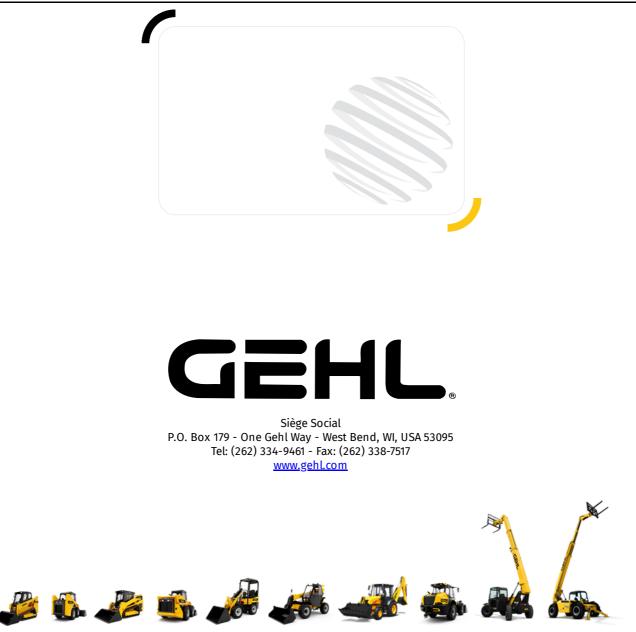

This brochure describes versions and configuration options for Gehl products which may be fitted with different equipment. The equipment described in this brochure may be standard, optional or not available depending on version. Gehl reserves the right to change the specifications shown and described at any time and without prior warning. The manufacturer is not liable for the specifications given. For more information, contact your Gehl dealer. Non-contractual document. Product descriptions may differ from actual products. List of specifications is not comprehensive. The logos and visual identity of the company are the property of Gehl and may not be used without authorization. All rights reserved. The photos and diagrams contained in this brochure are provided for information only.

MANITOU EQUIPMENT AMERICAS, LLC - Limited company with board of directors - Share capital: 39,668,399 euros - 857 802 508 RCS West Bend