Technical sheet:

# MT-X 1440







	MT-x 1440 Created on November 4, 2025 at 11:01 AM UTC	
Capacities	Metric	
Max. capacity	4000 kg	
Max. lifting height	13.53 m	
Maximum outreach	9.46 m	
Breakout force with bucket	8000 daN	
Weight and dimensions		
Overall length to carriage	l11 6.02 m	
Length to face of forks	l2 6.13 m	
Overall width	b1 2.42 m	
Overall height	h17 2.45 m	
Wheelbase	y 3.07 m	
Ground clearance	m4 0.37 m	
Overall cab width	b4 0.89 m	
Tilt-up angle	a4 12 °	
Tilt-down angle	a5 114 °	
External turning radius (over tyres)	Wa1 3.94 m	
Unladen weight (with forks)	11115 kg	
Overall weight	11115 kg	
Tires type Standard tires	Pneumatic  Alliance 400/80 - 24 - 162A8	)
Forks length / width / section  Performances	I / e / s 1200 mm x 125 mm x 50 mm	1
Lifting	15.50 s	
	11.60 s	
Lowering Extension	16.50 s	
Retraction	11.90 s	
Crowd	3.90 s	
Dump	4 s	
Engine	Dading	
Engine brand	Perkins	
Engine norm	Stage IIIA	
Engine model	1104D-44TA	
Number of cylinders / Capacity of cylinders	4 - 4400 cm³	
Engine power (Hp/kW)	101 Hp / 74.50 kW	
Max. torque / Engine rotation	400 Nm @ 1400 rpm	
Drawbar pull (Laden)	8250 daN	
Transmission		
Transmission type	Torque converter	
Number of gears (forward / reverse)	4 / 4	
Max. travel speed	24.90 km/h	
Max. travel speed (may vary according to applicable regulations)	25 km/h	
Parking brake	Automatic Negative Hand-brak	
Service brake	Oil-immersed multi-discs braking on f axles	ront & rear
Hydraulics	GAICS	
•	Coornumn	
Hydraulic pump type Hydraulic flow / Pressure	Gear pump 167 I/min-270 bar	
•	107 1/111111-270 bal	
Tank capacities	14.401	
Engine oil	11.40	
Hydraulic oil	135	
Hydraulic tank capacity	175	
Fuel	140 l	
Noise and vibration	20.10	
Noise at driving position (LpA)	82 dB	
Noise to environment (LwA)	105 dB	
Vibration on hands/arms	< 2.50 m/s <sup>2</sup>	
Miscellaneous		
Steering wheels (front / rear)	2/2	
Drive wheels (front / rear)	2/2	
Cab certification	Cabin ROPS - FOPS level 2	
Controls	JSM	

## MT-X 1440 - Dimensional drawing









### MT-X 1440 - Load chart

Machine on tires with forks - with levelling device Metric

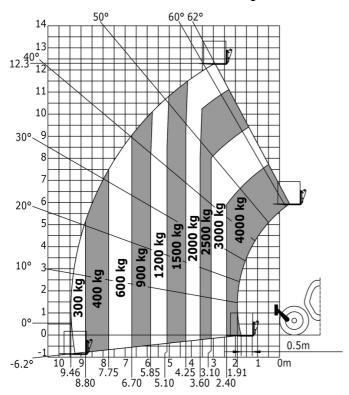

#### Machine on lowered stabilisers with forks Metric

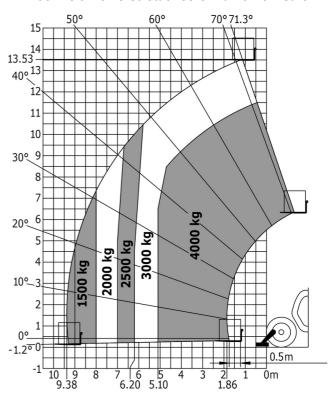





#### **Head Office**

B.P. 249 - 430 rue de l'Aubinière 44150 Ancenis Cedex - France Tel: +33 (0)2 40 09 10 11 - Fax: +33 (0)2 40 09 10 97 www.manitou.com



This publication provides a description of the configuration versions and options for Manitou products, which may differ for equipment. The equipment presented in this brochure may be part of a series, as an option, or it may not be available, depending on the versions. Manitou reserves the right, at any time and without notice, to amend the specifications described and represented. The specifications provided do not bind the manufacturer. For more details, please contact your Manitou agent. This is not a contractually binding document. The presentation of the products is not contractually binding. List of specifications non-exhaustive. The logos as well as the visual identity of the company are owned by Manitou and cannot be used without authorisation. All rights reserved. The photos and diagrams contained in this brochure are only provided for consultation and information purposes.

MANITOU BF SA - Limited company with board of directors - Share capital: 39,668,399 euros - 857 802 508 RCS Nantes