

Technical sheet :


ES 410 ET



 **MANITOU**
HANDLING YOUR WORLD

Technical characteristics		Metric	
1.1	Manufacturer	Manitou	
1.2	Model Name	ES 410 ET	
1.3	Power source	Electrical - Lead	
1.4	Operator type	Pedestrian	
1.5	Max. capacity	1000 kg	
1.6	Load center of gravity	600 mm	
1.8	Distance from Load backrest to center of rear axle	720 mm	
1.9	Wheelbase	1245 mm	
Weight			
2.1	Service weight	870 kg	
2.2	Weight on front axle (laden) / rear axle (laden)	709 kg / 1161 kg	
2.3	Weight on front axle (Unladen) / rear axle (Unladen)	609 kg / 261 kg	
Wheels			
3.1	Tires type	Polyurethane cushion	
3.3	Number of load wheels / Size of load wheels	2 / 125x50	
3.4	Number of stabilizer wheels / Size of the stabilizer wheels	1 / 125x50	
3.5	Number of front wheels / rear wheels	2 / 2	
3.5.2	Number of drive wheels / Size of drive wheels	1/230x70	
3.6	Front wheel gauge	517 mm	
3.7	Rear wheel gauge	380 mm	
Dimensions			
4.15	Fork height in low position	85 mm	
4.19	Overall length	1870 mm	
4.20	Length to face of forks	720 mm	
4.21	Overall width	800 mm	
4.22	Forks section / width / length	60 mm / 180 mm / 1150 mm	
4.24	Fork carriage width	680 mm	
4.31	Ground clearance below mast	35 mm	
4.32	Ground clearance at centre of wheelbase	20 mm	
4.35	Turning radius	1400 mm	
Performances			
5.1	Travel speed (laden / unladen)	5.80 km/h / 6 km/h	
5.2	Lifting speed (laden / unladen)	0.24 m/s / 0.14 m/s	
5.3	Lowering speed (laden / unladen)	0.20 m/s / 0.30 m/s	
5.8	Max Gradeability (laden / unladen)	8 % / 10 %	
5.10	Service brake	Electro magnetic	
Engine			
6.1	Drive motor rating S2 60 min	1.20 kW	
6.2	Lift motor rating at S3 15%	3 kW	
6.4	Battery voltage / capacity	24 V / 160 Ah	
6.5	Battery weight (+/- 5%)	150 kg	
Miscellaneous			
8.1	Type of drive control	AC	
8.4	Sound level at the driver's ear according to DIN 12 053	65 dB	

ES 410 ET - Dimensional drawing

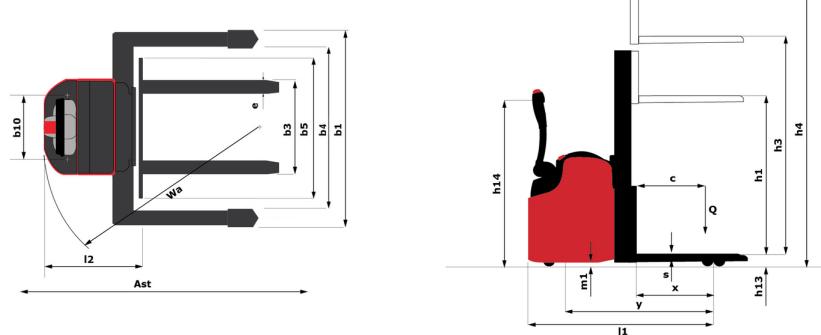

Characteristics of masts and residual capacities

Central Cylinder Duplex (CCD)	CCD 26	CCD 29	CCD 34
h1 - Mast lowered height mm	1780	1930	2180
h2 - Mast free lift mm	140	140	140
h3 - Mast lifting height mm	2630	2930	3430
h4 - Mast extended height mm	3065	3365	3865
Residual capacity at max height kg	1000	1000	900

Central Cylinder Simplex (CCS)	CCS 15	CCS 17
h1 - Mast lowered height mm	1930	2180
h2 - Mast free lift mm	1500	1750
h3 - Mast lifting height mm	1500	1750
h4 - Mast extended height mm	1930	2180
Residual capacity at max height kg	1000	1000



MANITOU HANDLING YOUR WORLD

Head Office

B.P. 249 - 430 rue de l'Aubinière

44150 Ancenis Cedex - France

Tel: +33 (0)2 40 09 10 11 - Fax: +33 (0)2 40 09 10 97

www.manitou.com



This publication provides a description of the configuration versions and options for Manitou products, which may differ for equipment. The equipment presented in this brochure may be part of a series, as an option, or it may not be available, depending on the versions. Manitou reserves the right, at any time and without notice, to amend the specifications described and represented. The specifications provided do not bind the manufacturer. For more details, please contact your Manitou agent. This is not a contractually binding document. The presentation of the products is not contractually binding. List of specifications non-exhaustive. The logos as well as the visual identity of the company are owned by Manitou and cannot be used without authorisation. All rights reserved. The photos and diagrams contained in this brochure are only provided for consultation and information purposes.

MANITOU BF SA - Limited company with board of directors - Share capital: 39,668,399 euros - 857 802 508 RCS Nantes