

Ficha técnica :


# ES-C 507



 **MANITOU**  
HANDLING YOUR WORLD

|       | Technical characteristics                               |           | Métrico                |
|-------|---------------------------------------------------------|-----------|------------------------|
| 1.1   | Manufacturer                                            |           | Manitou                |
| 1.2   | Model Name                                              |           | ES 507 GPF - ES-C 507  |
| 1.3   | Power source                                            |           | Electrical             |
| 1.4   | Operator type                                           |           | Pedestrian             |
| 1.5   | Max. capacity                                           | Q         | 700 kg                 |
| 1.6   | Load center of gravity                                  | c         | 400 mm                 |
| 1.8   | Distance from Load backrest to center of rear axle      | x         | 101 mm                 |
| 1.9   | Wheelbase                                               | y         | 932 mm                 |
|       | <b>Weight</b>                                           |           |                        |
| 2.1   | Service weight                                          |           | 1250 kg                |
| 2.2   | Weight on front axle (laden) / rear axle (laden)        |           | 1893 kg / 307 kg       |
| 2.3   | Weight on front axle (Unladen) / rear axle (Unladen)    |           | 820 kg / 680 kg        |
|       | <b>Wheels</b>                                           |           |                        |
| 3.1   | Tires type                                              |           | Polyurethane           |
| 3.3   | Number of load wheels / Size of load wheels             |           | 2 / 150x70             |
| 3.5   | Number of front wheels / rear wheels                    |           | 1 / 2                  |
| 3.5.2 | Number of drive wheels / Size of drive wheels           |           | 1/230x70               |
| 3.7   | Rear wheel gauge                                        | b11       | 826 mm                 |
|       | <b>Dimensions</b>                                       |           |                        |
| 4.15  | Fork height in low position                             | h13       | 35 mm                  |
| 4.19  | Overall length                                          | l1        | 2013 mm                |
| 4.20  | Length to face of forks                                 | l2        | 1213 mm                |
| 4.21  | Overall width                                           | b1        | 923 mm                 |
| 4.22  | Forks section / width / length                          | s / e / l | 30 mm / 90 mm / 800 mm |
| 4.23  | Fork carriage ISO 2328 (class/form) A/B                 |           | 2B                     |
| 4.24  | Fork carriage width                                     | b3        | 750 mm                 |
| 4.31  | Ground clearance below mast                             | m1        | 60 mm                  |
| 4.32  | Ground clearance at centre of wheelbase                 | m2        | 69 mm                  |
| 4.35  | Turning radius                                          | Wa        | 1335 mm                |
| 4.9   | Height tiller min. / max.                               | h14 / h14 | 830 mm / 1385 mm       |
|       | <b>Performances</b>                                     |           |                        |
| 5.1   | Travel speed (laden / unladen)                          |           | 4.50 km/h / 4.50 km/h  |
| 5.2   | Lifting speed (laden / unladen)                         |           | 0.30 m/s / 0.18 m/s    |
| 5.3   | Lowering speed (laden / unladen)                        |           | 0.22 m/s / 0.27 m/s    |
| 5.8   | Max Gradeability (laden / unladen)                      |           | 7 % / 10 %             |
| 5.10  | Service brake                                           |           | Electro magnetic       |
|       | <b>Engine</b>                                           |           |                        |
| 6.1   | Drive motor rating S2 60 min                            |           | 1.50 kW                |
| 6.2   | Lift motor rating at S3 15%                             |           | 3 kW                   |
| 6.3   | Battery according to DIN 43531/35/36 A, B, C            |           | DIN 43535-B            |
| 6.4   | Battery voltage / capacity                              |           | 24 V / 180 Ah          |
| 6.5   | Battery weight (+/- 5%)                                 |           | 189 kg                 |
|       | <b>Miscellaneous</b>                                    |           |                        |
| 8.1   | Type of drive control                                   |           | AC                     |
| 8.4   | Sound level at the driver's ear according to DIN 12 053 |           | 65 dB                  |

## ES-C 507 - Diagrama dimensional

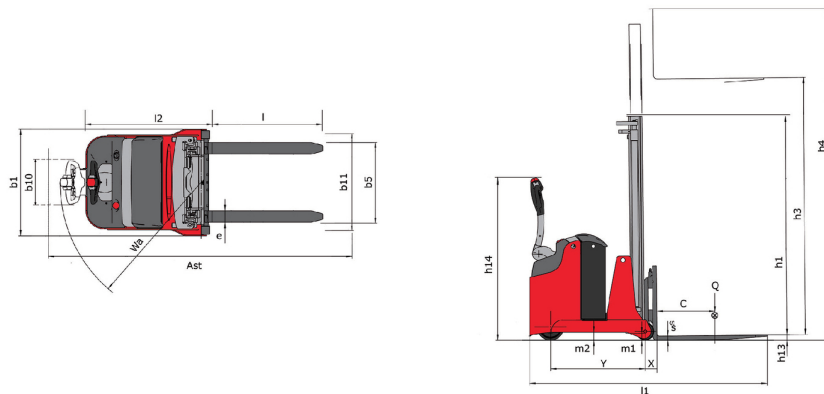

# Características de los mástiles y capacidad residual

| Central Cylinder Simplex (CCS)  |    | CCS 15 | CCS 17 |
|---------------------------------|----|--------|--------|
| h1 - Mast lowered height        | mm | 1931   | 2181   |
| h2 - Mast free lift             | mm | 1420   | 1670   |
| h3 - Mast lifting height        | mm | 1420   | 1670   |
| h4 - Mast extended height       | mm | 2070   | 2320   |
| Residual capacity at max height | kg | 700    | 700    |

| Full Visibility Duplex (FVD)    |    | FVD 29 | FVD 34 | FVD 38 |
|---------------------------------|----|--------|--------|--------|
| h1 - Mast lowered height        | mm | 1931   | 2181   | 2381   |
| h3 - Mast lifting height        | mm | 2850   | 3350   | 3750   |
| h4 - Mast extended height       | mm | 3500   | 4000   | 4400   |
| Residual capacity at max height | kg | 700    | 700    | 600    |

| Free Lift Duplex (FLD)          |    | FLD 29 | FLD 34 |
|---------------------------------|----|--------|--------|
| h1 - Mast lowered height        | mm | 1931   | 2181   |
| h2 - Mast free lift             | mm | 1420   | 1670   |
| h3 - Mast lifting height        | mm | 2850   | 3355   |
| h4 - Mast extended height       | mm | 3500   | 4000   |
| Residual capacity at max height | kg | 700    | 700    |

| Free Lift Triplex (FLT)         |    | FLT 42 |
|---------------------------------|----|--------|
| h1 - Mast lowered height        | mm | 1956   |
| h2 - Mast free lift             | mm | 1380   |
| h3 - Mast lifting height        | mm | 4160   |
| h4 - Mast extended height       | mm | 4810   |
| Residual capacity at max height | kg | 500    |



**Oficina Central**

B.P. 249 - 430 rue de l'Aubinière

44150 Ancenis Cedex - Francia

Tel.: 00 33 (0)2 40 09 10 11 - Fax: 00 33 (0)2 40 09 10 97

[www.manitou.com](http://www.manitou.com)



Esta publicación describe las versiones y posibilidades de configuración de los productos Manitou que puedan diferir en equipamiento. Los equipamientos presentados en este folleto pueden ser de serie, opcionales o no estar disponibles en algunas versiones. Manitou se reserva el derecho, en cualquier momento y sin previo aviso, de modificar las especificaciones descritas y representadas. Las especificaciones aportadas no comprometen al fabricante. Para más información, póngase en contacto con su concesionario Manitou. Documento no contractual. Presentación de los productos no contractual. Lista de especificaciones no exhaustiva. Los logos y la identidad visual de la empresa son propiedad de Manitou y no pueden ser utilizados sin autorización. Todos los derechos reservados. Las fotos y los esquemas contenidos en este folleto se ofrecen para consulta y a título indicativo solamente.

Manitou BF SA - Sociedad anónima con Consejo de Administración - Capital social: 39 668 399 euros - 857 802 508 RCS Nantes