

Scheda tecnica :


ES 612 LI



 **MANITOU**
HANDLING YOUR WORLD

| Technical characteristics | | Metrico | |
|---------------------------|---|-----------|--------------------------|
| 1.1 | Manufacturer | | Manitou |
| 1.2 | Model Name | | ES 612 LI |
| 1.3 | Power source | | Electrical |
| 1.4 | Operator type | | Pedestrian |
| 1.5 | Max. capacity | Q | 1200 kg |
| 1.6 | Load center of gravity | c | 600 mm |
| 1.8 | Distance from Load backrest to center of rear axle | x | 834 mm |
| 1.9 | Wheelbase | y | 1492 mm |
| Weight | | | |
| 2.1 | Service weight | | 1251 kg |
| 2.2 | Weight on front axle (laden) / rear axle (laden) | | 1295 kg / 1163 kg |
| 2.3 | Weight on front axle (Unladen) / rear axle (Unladen) | | 1328 kg / 1003 kg |
| Wheels | | | |
| 3.1 | Tires type | | Bandage |
| 3.3 | Number of load wheels / Size of load wheels | | 2 / 140x60 |
| 3.4 | Number of stabilizer wheels / Size of the stabilizer wheels | | 1 / 140x60 |
| 3.5 | Number of front wheels / rear wheels | | 2 / 4 |
| 3.5.2 | Number of drive wheels / Size of drive wheels | | 1/230x70 |
| 3.6 | Front wheel gauge | b10 | 529 mm |
| 3.7 | Rear wheel gauge | b11 | 380 mm |
| Dimensions | | | |
| 4.6 | Initial lift | h5 | 110 mm |
| 4.19 | Overall length | l1 | 2162 mm |
| 4.20 | Length to face of forks | l2 | 973 mm |
| 4.21 | Overall width | b1 | 800 mm |
| 4.22 | Forks section / width / length | s / e / l | 60 mm / 185 mm / 1190 mm |
| 4.24 | Fork carriage width | b3 | 700 mm |
| 4.32 | Ground clearance at centre of wheelbase | m2 | 30 mm |
| 4.33 | Aisle Width for pallets 1000 x 1200 crossways | Ast | 2521 mm |
| 4.34 | Aisle width for 800 x 1200 pallet lengthways | Ast | 2428 mm |
| 4.35 | Turning radius | Wa | 1716 mm |
| 4.9 | Height tiller min. / max. | h14 / h14 | 750 mm / 1250 mm |
| Performances | | | |
| 5.1 | Travel speed (laden / unladen) | | 4.50 km/h / 4.50 km/h |
| 5.2 | Lifting speed (laden / unladen) | | 0.18 m/s / 0.30 m/s |
| 5.3 | Lowering speed (laden / unladen) | | 0.27 m/s / 0.22 m/s |
| 5.8 | Max Gradeability (laden / unladen) | | 7 % / 10 % |
| 5.10 | Service brake | | Electro magnetic |
| Engine | | | |
| 6.1 | Drive motor rating S2 60 min | | 1.50 kW |
| 6.2 | Lift motor rating at S3 15% | | 3 kW |
| 6.3 | Battery according to DIN 43531/35/36 A, B, C | | DIN 43535-B |
| 6.4 | Battery voltage / capacity | | 24 V / 180 Ah |
| 6.5 | Battery weight (+/- 5%) | | 189 kg |
| Miscellaneous | | | |
| 8.1 | Type of drive control | | AC |
| 8.4 | Sound level at the driver's ear according to DIN 12 053 | | 65 dB |

ES 612 LI - Disegno quotato

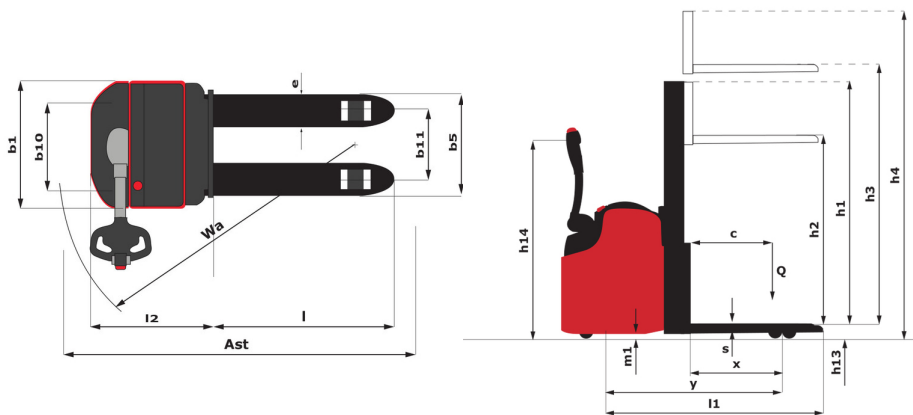

Caratteristiche dei montanti e capacità residue

| Central Cylinder Simplex (CCS) | | CCS 15 | CCS 17 |
|---------------------------------|----|--------|--------|
| h1 - Mast lowered height | mm | 1953 | 2203 |
| h2 - Mast free lift | mm | 1506 | 1756 |
| h3 - Mast lifting height | mm | 1506 | 1756 |
| h4 - Mast extended height | mm | 1960 | 2210 |
| Residual capacity at max height | kg | 1200 | 1200 |

| Full Visibility Duplex (FVD) | | FVD 29 | FVD 34 | FVD 38 |
|---------------------------------|----|--------|--------|--------|
| h1 - Mast lowered height | mm | 1953 | 2203 | 2403 |
| h3 - Mast lifting height | mm | 2936 | 3436 | 3836 |
| h4 - Mast extended height | mm | 3390 | 3890 | 4290 |
| Residual capacity at max height | kg | 1200 | 1050 | 800 |

| Free Lift Duplex (FLD) | | FLD 29 | FLD 34 |
|---------------------------------|----|---------|--------|
| h1 - Mast lowered height | mm | 1953 | 2203 |
| h2 - Mast free lift | mm | 1506 | 1756 |
| h3 - Mast lifting height | mm | 2931 | 3431 |
| h4 - Mast extended height | mm | 3385000 | 3885 |
| Residual capacity at max height | kg | 1200 | 1050 |

| Free Lift Triplex (FLT) | | FLT 42 | FLT 45 |
|---------------------------------|----|--------|--------|
| h1 - Mast lowered height | mm | 1911 | 2071 |
| h2 - Mast free lift | mm | 1466 | 1626 |
| h3 - Mast lifting height | mm | 4246 | 4726 |
| h4 - Mast extended height | mm | 4723 | 5203 |
| Residual capacity at max height | kg | 650 | 580 |



 **MANITOU**
HANDLING YOUR WORLD

Sede centrale

MANITOU ITALIA Srl

Via Cristoforo Colombo 2, Loc. Cavazzona - 41013 CASTELFRANCO EMILIA (MO)

Tel: 059.95.98.11 - Fax 059.95.98.65

www.manitou.com



Questa pubblicazione presenta la descrizione delle versioni e delle possibilità di configurazione dei prodotti Manitou, che possono differire per attrezzature. Gli allestimenti presentati nel presente opuscolo possono essere di serie, optional o non disponibili, a seconda delle versioni. Manitou si riserva il diritto di modificare, in qualsiasi momento e senza alcun preavviso, le specifiche tecniche descritte e rappresentate. Le specifiche indicate non rappresentano alcun obbligo per il costruttore. Per maggiori dettagli, rivolgersi al proprio concessionario Manitou. Documento non contrattuale. Elenco delle specifiche non esaustivo. I loghi nonché l'identità visiva dell'azienda sono di proprietà di Manitou e non possono essere utilizzati senza autorizzazione. Tutti i diritti riservati. Le immagini e gli schemi contenuti nel presente opuscolo sono forniti esclusivamente a fini di consultazione e a titolo indicativo.

Manitou BF SA - Società anonima con consiglio di amministrazione. Capitale sociale: 39,668,399 euro - 857 802 508 RCS Nantes