Technical sheet :








	Technical characteristics	
1.1	Manufacturer	
1.2	Model Name	
1.3	Power source	
1.4	Operator type	
1.5	Max. capacity	Q
1.6	Load center of gravity	С
1.8	Distance from Load backrest to center of rear axle	х
1.9	Wheelbase	у
	Weight	
2.1	Service weight	
2.2	Weight on front axle (laden) / rear axle (laden)	
2.3	Weight on front axle (Unladen) / rear axle (Unladen)	
	Wheels	
3.1	Tires type	
3.3	Number of load wheels / Size of load wheels	
3.4	Number of stabilizer wheels / Size of the stabilizer wheels	
3.5	Number of front wheels / rear wheels	
3.5.2	Number of drive wheels / Size of drive wheels	
3.6	Front wheel gauge	b10
3.7	Rear wheel gauge	b11
	Dimensions	
4.15	Fork height in low position	h13
4.19	Overall length	11
4.20	Length to face of forks	12
4.21	Overall width	b1
4.22	Forks section / width / length	s / e /
4.24	Fork carriage width	b3
4.32	Ground clearance at centre of wheelbase	m2
4.33	Aisle Width for pallets 1000 x 1200 crossways	Ast
4.34	Aisle width for 800 x 1200 pallet lengthways	Ast
4.35	Turning radius	Wa
4.9	Height tiller min. / max.	h14 / h
	Performances	
5.1	Travel speed (laden / unladen)	
5.2	Lifting speed (laden / unladen)	
5.3	Lowering speed (laden / unladen)	
5.8	Max Gradeability (laden / unladen)	
5.10	Service brake	
	Engine	
6.1	Drive motor rating S2 60 min	
6.2	Lift motor rating at S3 15%	
6.3	Battery according to DIN 43531/35/36 A, B, C	
6.4	Battery voltage / capacity	
6.5	Battery weight (+/- 5%)	
	Miscellaneous	
8.1	Type of drive control	
8.4	Sound level at the driver's ear according to DIN 12 053	

ES 61	G Created on August 30, 2025 at 8:00 PM UTC
	Metric
	Manitou
	ES 616
	Electrical - Lead
	Pedestrian
Q	1600 kg
c	600 mm
X	687 mm
у	1252 mm
,	
	1095 kg
	1065 kg / 1620 kg
	855 kg / 240 kg
	500 kg / 210 kg
	Polyurethane
	24 / 82 x 68
	1 / 120 x 54
	2/2
	1/230x70
b10	529 m
b11	380 mm
h13	85 mm
11	1910 mm
12	761 mm
b1	800 mm
s / e / l	60 mm / 185 mm / 1150 mm
b3	700 mm
m2	30 mm
Ast	2286 mm
Ast	2325 mm
Wa	1476 mm
h14 / h14	750 mm / 1250 mm
	6 km/h / 6 km/h
	0.18 m/s / 0.30 m/s
	0.27 m/s / 0.22 m/s
	7 % / 10 %
	Electro magnetic
	1.50 kW
	3 kW
	DIN 43535-B
	24 V / 250 Ah
	189 kg
	AC
	65 dB

ES 616 - Dimensional drawing

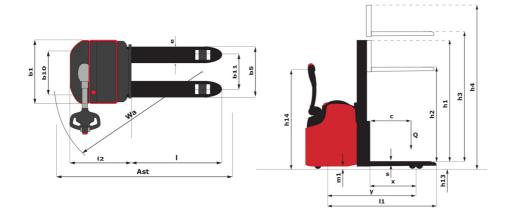

Characteristics of masts and residual capacities

Central Cylinder Simplex (CCS)		CCS 15	CCS 17
h1 - Mast lowered height	mm	1930	2180
h2 - Mast free lift	mm	1505	1755
h3 - Mast lifting height	mm	1505	1755
h4 - Mast extended height	mm	1944	2194
Residual capacity at max height	kg	1600	1600

Full Visibility Duplex (FVD)		FVD 29	FVD 34	FVD 38
h1 - Mast lowered height	mm	1930	2180	2380
h3 - Mast lifting height	mm	2935	3435	3835
h4 - Mast extended height	mm	3374	3874	4274
Residual capacity at max height	kg	1350	1100	900

Free Lift Duplex (FLD)		FLD 29	FLD 34
h1 - Mast lowered height	mm	1930	2180
h2 - Mast free lift	mm	1505	1755
h3 - Mast lifting height	mm	2930	3430
h4 - Mast extended height	mm	3369	3869
Residual capacity at max height	kg	1350	1100

Free Lift Triplex (FLT)		FLT 42	FLT 47	FLT 54
h1 - Mast lowered height	mm	1889	2049	2300
h2 - Mast free lift	mm	1465	1625	1875
h3 - Mast lifting height	mm	4245	4725	5455
h4 - Mast extended height	mm	4701	5181	5880
Residual capacity at max height	kg	700	550	500



Head Office B.P. 249 - 430 rue de l'Aubinière 44150 Ancenis Cedex - France Tel: +33 (0)2 40 09 10 11 - Fax: +33 (0)2 40 09 10 97 www.manitou.com



This publication provides a description of the configuration versions and options for Manitou products, which may differ for equipment. The equipment presented in this brochure may be part of a series, as an option, or it may not be available, depending on the versions. Manitou reserves the right, at any time and without notice, to amend the specifications described and represented. The specifications provided do not bind the manufacturer. For more details, please contact your Manitou agent. This is not a contractually binding document. The presentation of the products is not contractually binding. List of specifications non-exhaustive. The logos as well as the visual identity of the company are owned by Manitou and cannot be used without authorisation. All rights reserved. The photos and diagrams contained in this brochure are only provided for consultation and information purposes.

MANITOU BF SA - Limited company with board of directors - Share capital: 39,668,399 euros - 857 802 508 RCS Nantes