


Technical sheet :


# **KLEOS EB 250 D18**

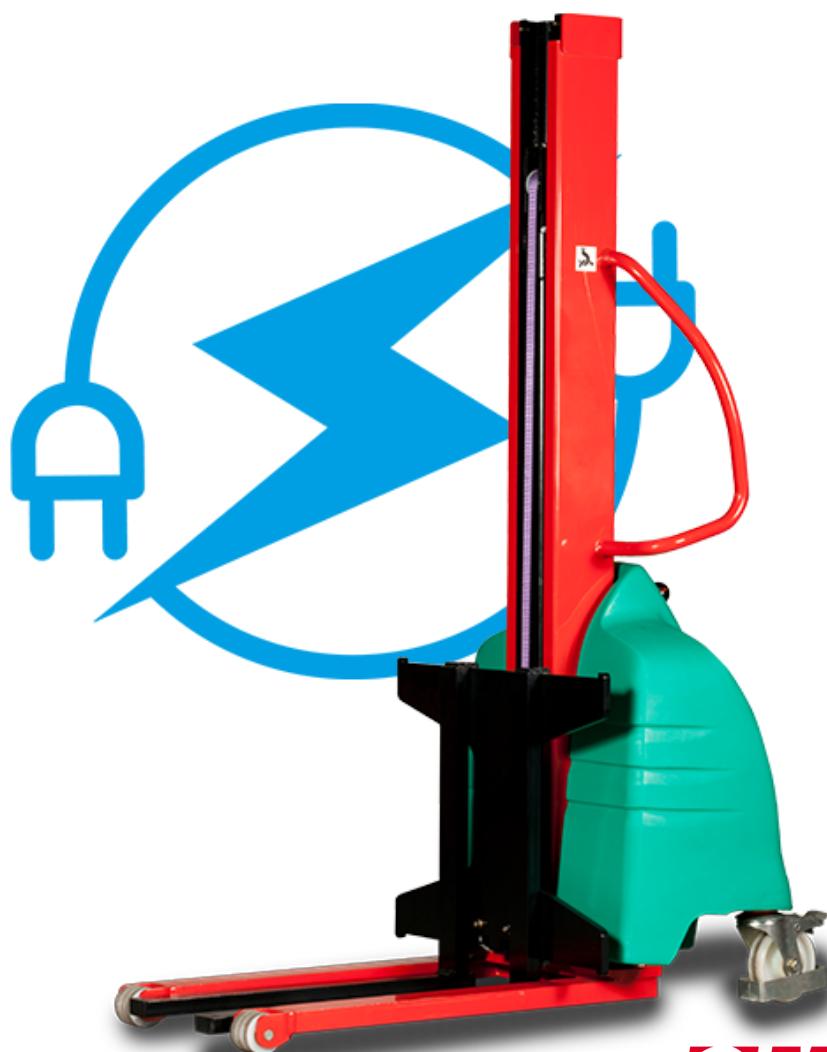

 **MANITOU**  
HANDLING YOUR WORLD

Technical characteristics		Metric	
1.1	Manufacturer		Manitou
1.2	Model Name		Kleos EB 250 D18
1.3	Power source		Electrical - Lead
1.4	Operator type		Pedestrian
1.5	Max. capacity	Q	250 kg
1.6	Load center of gravity	c	250 mm
2.1	<b>Weight</b>		155 kg
3.1	Overall weight without tools		
3.2	Wheels		
3.3	Tires type		Nylon
4.19	Dimensions of front wheels		2x (75x65)
4.20	Dimensions of rear wheels		2x (150x50)
4.21	<b>Dimensions</b>		
4.32	Mast lowered height	h1	1585 mm
4.5	Mast extended height	h4	2475 mm
4.20	Overall length	l1	1032 mm
4.21	Length to face of forks	l2	571 mm
4.32	Overall width	b1	710 mm
	Ground clearance at centre of wheelbase	m2	40 mm
5.2	<b>Performances</b>		
5.3	Lifting speed (laden / unladen)		0.07 m/s / 0.07 m/s
5.11	Lowering speed (laden / unladen)		0.10 m/s / 0.10 m/s
5.11	Parking brake		Mecanic
6.2	<b>Engine</b>		
6.4	Lift motor rating at S3 15%		1.20 kW
6.4	Battery voltage / capacity		12 V / 110 Ah
8.4	<b>Miscellaneous</b>		
8.4	Sound level at the driver's ear according to DIN 12 053		65 dB





## Kleos EB 250 D18 - Dimensional drawing

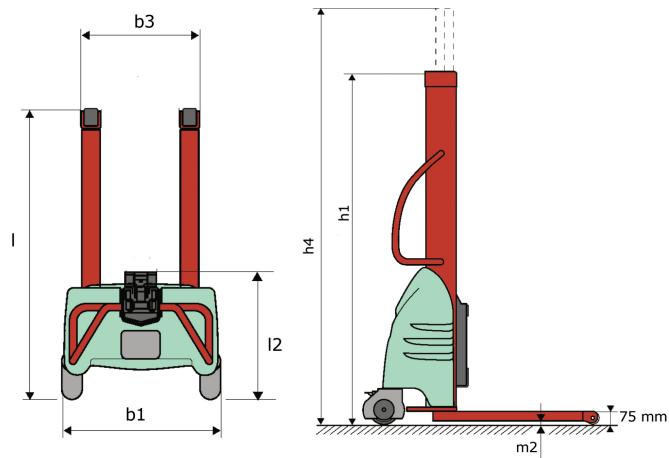

## Tool characteristics

Tool 250 kg	Attachment capacity kg	Center of gravity of load mm	A1 mm	A2 mm	B mm	B1 mm	C mm	D mm	E mm	E1 mm	E2 mm	F mm	Weight kg	
EPE 250	250	250	500	515	40	-	-	270	-	-	-	320	21	
FA 250	250	250	500	540	-	230	650	50	50	20	-	-	680	33
PLF 250	200	300	620	635	500	-	-	280	-	88	-	-	630	40
POT 250	150	400	425	440	50	-	-	170	-	-	-	-	320	22

## Tools





# **MANITOU** HANDLING YOUR WORLD

## Head Office

B.P. 249 - 430 rue de l'Aubinière  
44150 Ancenis Cedex - France  
Tel: +33 (0)2 40 09 10 11 - Fax: +33 (0)2 40 09 10 97  
[www.manitou.com](http://www.manitou.com)



This publication provides a description of the configuration versions and options for Manitou products, which may differ for equipment. The equipment presented in this brochure may be part of a series, as an option, or it may not be available, depending on the versions. Manitou reserves the right, at any time and without notice, to amend the specifications described and represented. The specifications provided do not bind the manufacturer. For more details, please contact your Manitou agent. This is not a contractually binding document. The presentation of the products is not contractually binding. List of specifications non-exhaustive. The logos as well as the visual identity of the company are owned by Manitou and cannot be used without authorisation. All rights reserved. The photos and diagrams contained in this brochure are only provided for consultation and information purposes.

MANITOU BF SA - Limited company with board of directors - Share capital: 39,668,399 euros - 857 802 508 RCS Nantes