Technical sheet :


KLEOS HM 250 D18





1.1ManufacturerManitou1.2Model NameHM 250 D181.3Power sourceManual1.4Operator typePedestrian1.5Max. capacityQ1.6Load center of gravitycWeight	
1.3Power sourceManual1.4Operator typePedestrian1.5Max. capacityQ250 kg1.6Load center of gravityc250 mmWeight	
1.4Operator typePedestrian1.5Max. capacityQ250 kg1.6Load center of gravityc250 mmWeight	
1.5 Max. capacity Q 250 kg 1.6 Load center of gravity c 250 mm Weight	
1.6 Load center of gravity c 250 mm Weight	
Weight	
2.1 Overall weight without tools 110 kg	
Wheels	
3.1 Tires type Nylon	
3.2 Dimensions of front wheels 2x (75x65)	
3.3 Dimensions of rear wheels 2x (150x50)	
Dimensions	
4.2 Mast lowered height h1 1585 mm	
4.5 Mast extended height h4 2475 mm	
4.19 Overall length 11 1032 mm	
4.20 Length to face of forks 12 571 mm	
4.21 Overall width b1 710 mm	
4.25 Forks spread b5 529 mm	
Performances	
5.2 Lifting speed (laden / unladen) 0.10 m/s / 0.10 m/s	
5.3 Lowering speed (laden / unladen) 0.10 m/s / 0.10 m/s	
5.11 Parking brake Mecanic	


Kleos HM 250 D18 - Dimensional drawing

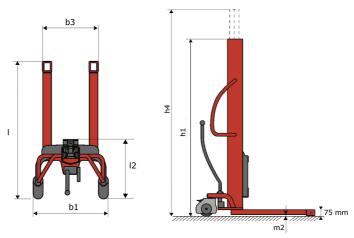

Tool characteristics

Tool 250 kg	Attachment capacity	Center of gravity of load	A1	A2	В	E	31	С	D	E	E1	E2	F	Weight
	kg	mm	mm	mm	mm	mm	mm	mm	mm	mm	mm	mm	mm	kg
EPE 250	250	250	500	515	40	-	-	270	-	-	-	-	320	21
FA 250	250	250	500	540	-	230	650	50	50	20	-	-	680	33
PLF 250	200	300	620	635	500	-	-	280	-	88	-	-	630	40
POT 250	150	400	425	440	50	-	-	170	-	-	-	-	320	22

Tools

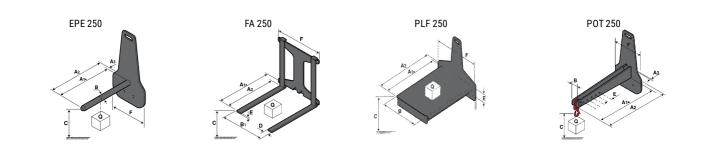



Head Office B.P. 249 - 430 rue de l'Aubinière 44150 Ancenis Cedex - France Tel: +33 (0)2 40 09 10 11 - Fax: +33 (0)2 40 09 10 97 www.manitou.com



This publication provides a description of the configuration versions and options for Manitou products, which may differ for equipment. The equipment presented in this brochure may be part of a series, as an option, or it may not be available, depending on the versions. Manitou reserves the right, at any time and without notice, to amend the specifications described and represented. The specifications provided do not bind the manufacturer. For more details, please contact your Manitou agent. This is not a contractually binding document. The presentation of the products is not contractually binding. List of specifications non-exhaustive. The logos as well as the visual identity of the company are owned by Manitou and cannot be used without authorisation. All rights reserved. The photos and diagrams contained in this brochure are only provided for consultation and information purposes.

MANITOU BF SA - Limited company with board of directors - Share capital: 39,668,399 euros - 857 802 508 RCS Nantes