Technical sheet :


KLEOS HM 250 D25





1.1 Manufacturer 1.2 Model Name 1.3 Power source 1.4 Operator type 1.5 Max. capacity 1.6 Load center of gravity Weight		Q	Manitou HM 250 D25 Manual Pedestrian 250 kg
1.3 Power source 1.4 Operator type 1.5 Max. capacity 1.6 Load center of gravity			Manual Pedestrian 250 kg
1.4 Operator type 1.5 Max. capacity 1.6 Load center of gravity			Pedestrian 250 kg
1.5 Max. capacity 1.6 Load center of gravity			250 kg
1.6 Load center of gravity			-
		С	
Weight			250 mm
2.1 Overall weight without tools			110 kg
Wheels			
3.1 Tires type			Nylon
3.2 Dimensions of front wheels			2x (75x65)
3.3 Dimensions of rear wheels			2x (150x50)
Dimensions			
4.2 Mast lowered height		h1	1815 mm
4.5 Mast extended height		h4	3055 mm
4.19 Overall length		11	1032 mm
4.20 Length to face of forks		12	571 mm
4.21 Overall width		b1	710 mm
4.25 Fork spread		b5	529 mm
4.32 Ground clearance at centre of whe	elbase	m2	40 mm
Performances			
5.2 Lifting speed (laden / unladen)			0.10 m/s / 0.10 m/s
5.3 Lowering speed (laden / unladen)			0.10 m/s / 0.10 m/s
5.11 Parking brake			Mecanic


Kleos HM 250 D25 - Dimensional drawing

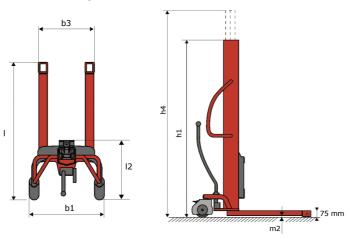

Tool characteristics

Tool 250 kg	Attachment capacity	Center of gravity of load	A1	A2	В	E	31	С	D	E	E1	E2	F	Weight
	kg	mm	mm	mm	mm	mm	mm	mm	mm	mm	mm	mm	mm	kg
EPE 250	250	250	500	515	40	-	-	270	-	-	-	-	320	21
FA 250	250	250	500	540	-	230	650	50	50	20	-	-	680	33
PLF 250	200	300	620	635	500	-	-	280	-	88	-	-	630	40
POT 250	150	400	425	440	50	-	-	170	-	-	-	-	320	22

Tools

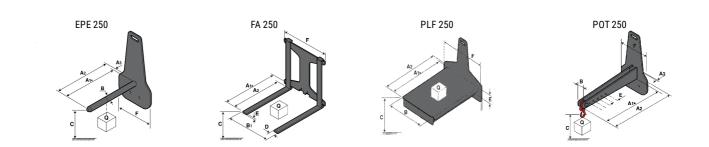



B.P. 249 - 430 rue de l'Aubinière 44150 Ancenis Cedex - France Tel: +33 (0)2 40 09 10 11 - Fax: +33 (0)2 40 09 10 97 www.manitou.com



This publication provides a description of the configuration versions and options for Manitou products, which may differ for equipment. The equipment presented in this brochure may be part of a series, as an option, or it may not be available, depending on the versions. Manitou reserves the right, at any time and without notice, to amend the specifications described and represented. The specifications provided do not bind the manufacturer. For more details, please contact your Manitou agent. This is not a contractually binding document. The presentation of the products is not contractually binding. List of specifications non-exhaustive. The logos as well as the visual identity of the company are owned by Manitou and cannot be used without authorisation. All rights reserved. The photos and diagrams contained in this brochure are only provided for consultation and information purposes.

MANITOU BF SA - Limited company with board of directors - Share capital: 39,668,399 euros - 857 802 508 RCS Nantes