Technical sheet :


KLEOS HM 250 D25





Technical characteristicsMetric1.1ManufacturerMainitou1.2Model NameHM 250 D251.3Power sourceHM 250 D251.3Power sourceManual1.4Operator typePedestrian1.5Max. capacityQ250 kg1.6Load center of gravityc250 mm2.1Overall weight without toolsC250 mm3.1Tires type110 kg110 kg3.2Dimensions of front wheels2x (75x65)3.3Dimensions of rear wheels2x (150x50)4.2Mast lowered heighth11815 mm4.5Mast extended heighth43055 mm	
1.2Model NameHM 250 D251.3Power sourceIdManual1.4Operator typePedestrian1.5Max. capacityQ250 kg1.6Load center of gravityc250 mm2.1Overall weight without toolsId110 kg2.1Overall weight without toolsId110 kg3.1Tires typeId2x (75x65)3.2Dimensions of front wheelsId2x (150x50)3.3Dimensions of rear wheelsId1815 mm	
1.3Power sourceManual1.4Operator typePedestrian1.5Max. capacityQ250 kg1.6Load center of gravityc250 mmWeight2.1Overall weight without toolsImage: Source of gravityImage: Source of gravity3.1Tires typeImage: Source of gravityImage: Source of gravity3.1Tires typeImage: Source of gravityImage: Source of gravity3.1Tires typeImage: Source of gravityImage: Source of gravity3.2Dimensions of front wheelsImage: Source of gravityImage: Source of gravity3.3Dimensions of rear wheelsImage: Source of gravityImage: Source of gravity4.2Mast lowered heighth11815 mm	
1.4Operator typePedestrian1.5Max. capacityQ250 kg1.6Load center of gravityc250 mm2.1Overall weight without toolsImage: Second condition of the second conditio	
1.5Max. capacityQ250 kg1.6Load center of gravityc250 mWeightC250 m2.1Overall weight without toolsI100 mWheelsI110 kg3.1Tires typeINylon3.2Dimensions of front wheels2x (75x65)3.3Dimensions of rear wheels2x (150x50)Image: Dimensions of rear wheelsImage: Dimensions4.2Mast lowered heighth1	
1.6Load center of gravityc250 mmWeightC250 mm2.1Overall weight without tools110 kgWheelsC110 kg3.1Tires type23.2Dimensions of front wheels2x (75x65)3.3Dimensions of rear wheels2x (150x50)DimensionsC2x (150x50)4.2Mast lowered heighth1	
WeightWeight2.1Overall weight without tools110 kgWheels103.1Tires type103.2Dimensions of front wheels2x (75x65)3.3Dimensions of rear wheels2x (150x50)Dimensions104.2Mast lowered heighth1	
2.1Overall weight without tools110 kgWheelsNylon3.1Tires type2x (75x65)3.2Dimensions of front wheels2x (75x65)3.3Dimensions of rear wheels2x (150x50)Dimensions4.2Mast lowered heighth1	
WheelsMeels3.1Tires typeNylon3.2Dimensions of front wheels2x (75x65)3.3Dimensions of rear wheels2x (150x50)Dimensions4.2Mast lowered heighth1	
3.1Tires typeNylon3.2Dimensions of front wheels2x (75x65)3.3Dimensions of rear wheels2x (150x50)Dimensions4.2Mast lowered heighth1	
3.2Dimensions of front wheels2x (75x65)3.3Dimensions of rear wheels2x (150x50)DimensionsDimensionsDimensions4.2Mast lowered heighth11815 mm	
3.3Dimensions of rear wheels2x (150x50)DimensionsDimensionsDimensions4.2Mast lowered heighth11815 mm	
Dimensions 4.2 Mast lowered height h1 1815 mm	
4.2 Mast lowered height h1 1815 mm	
4.5 Mast extended height h4 3055 mm	
4.19 Overall length 11 1032 mm	
4.20 Length to face of forks 12 571 mm	
4.21 Overall width b1 710 mm	
4.25 Fork spread b5 529 mm	
4.32 Ground clearance at centre of wheelbase m2 40 mm	
Performances	
5.2 Lifting speed (laden / unladen) 0.10 m/s / 0.10 m/s	
5.3 Lowering speed (laden / unladen) 0.10 m/s / 0.10 m/s	
5.11 Parking brake Mecanic	


Kleos HM 250 D25 - Dimensional drawing

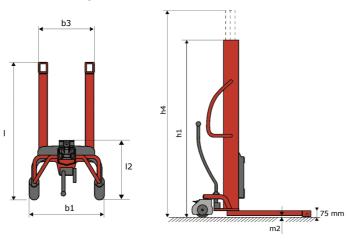

Tool characteristics

Tool 250 kg	Attachment capacity	Center of gravity of load	A1	A2	В	E	31	С	D	E	E1	E2	F	Weight
	kg	mm	mm	mm	mm	mm	mm	mm	mm	mm	mm	mm	mm	kg
EPE 250	250	250	500	515	40	-	-	270	-	-	-	-	320	21
FA 250	250	250	500	540	-	230	650	50	50	20	-	-	680	33
PLF 250	200	300	620	635	500	-	-	280	-	88	-	-	630	40
POT 250	150	400	425	440	50	-	-	170	-	-	-	-	320	22

Tools

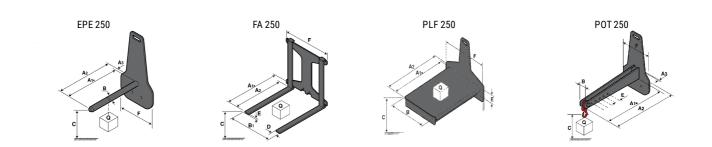



Head Office B.P. 249 - 430 rue de l'Aubinière 44150 Ancenis Cedex - France Tel: +33 (0)2 40 09 10 11 - Fax: +33 (0)2 40 09 10 97 www.manitou.com



This publication provides a description of the configuration versions and options for Manitou products, which may differ for equipment. The equipment presented in this brochure may be part of a series, as an option, or it may not be available, depending on the versions. Manitou reserves the right, at any time and without notice, to amend the specifications described and represented. The specifications provided do not bind the manufacturer. For more details, please contact your Manitou agent. This is not a contractually binding document. The presentation of the products is not contractually binding. List of specifications non-exhaustive. The logos as well as the visual identity of the company are owned by Manitou and cannot be used without authorisation. All rights reserved. The photos and diagrams contained in this brochure are only provided for consultation and information purposes.

MANITOU BF SA - Limited company with board of directors - Share capital: 39,668,399 euros - 857 802 508 RCS Nantes