Technical sheet :


KLEOS HM 250 D25





1.1 Manufacturer Manitativer 1.2 Model Name HM 250 1.3 Power source Manuary 1.4 Operator type Pedestr 1.5 Max. capacity Q 250 k 1.6 Load center of gravity c 250 m 2.1 Overall weight without tools 110 k	D25 al ian g m
1.3Power sourceManu1.4Operator typePedestr1.5Max. capacityQ250 k1.6Load center of gravityc250 mWeight	al ian g m
1.4 Operator type Pedestr 1.5 Max. capacity Q 250 k 1.6 Load center of gravity c 250 m Weight Veight Veight Veight	ian g m
1.5 Max. capacity Q 250 k 1.6 Load center of gravity c 250 m Weight Weight C 250 m	g m
1.6 Load center of gravity c 250 m Weight	m
Weight	
	3
2.1 Overall weight without tools 110 k	3
Wheels	
3.1 Tires type Nylor	
3.2 Dimensions of front wheels 2x (75x	δ5)
3.3 Dimensions of rear wheels 2x (150)	50)
Dimensions	
4.2 Mast lowered height h1 1815 m	m
4.5 Mast extended height h4 3055 m	m
4.19 Overall length 11 1032 m	m
4.20 Length to face of forks 12 571 m	n
4.21 Overall width b1 710 m	n
4.25 Fork spread b5 529 m	n
4.32 Ground clearance at centre of wheelbase m2 40 mr	n
Performances	
5.2 Lifting speed (laden / unladen) 0.10 m/s / 0	.10 m/s
5.3 Lowering speed (laden / unladen) 0.10 m/s / 0	.10 m/s
5.11 Parking brake Mecan	ic


Kleos HM 250 D25 - Dimensional drawing

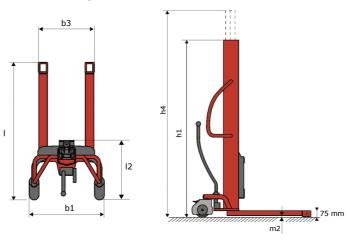

Tool characteristics

Tool 250 kg	Attachment capacity	Center of gravity of load	A1	A2	В	E	31	С	D	E	E1	E2	F	Weight
	kg	mm	mm	mm	mm	mm	mm	mm	mm	mm	mm	mm	mm	kg
EPE 250	250	250	500	515	40	-	-	270	-	-	-	-	320	21
FA 250	250	250	500	540	-	230	650	50	50	20	-	-	680	33
PLF 250	200	300	620	635	500	-	-	280	-	88	-	-	630	40
POT 250	150	400	425	440	50	-	-	170	-	-	-	-	320	22

Tools

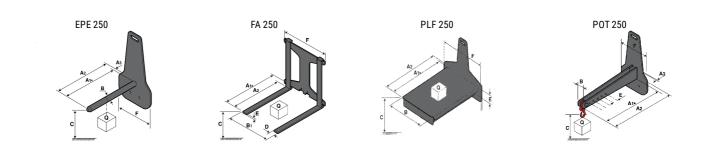



Head Office B.P. 249 - 430 rue de l'Aubinière 44150 Ancenis Cedex - France Tel: +33 (0)2 40 09 10 11 - Fax: +33 (0)2 40 09 10 97 www.manitou.com



This publication provides a description of the configuration versions and options for Manitou products, which may differ for equipment. The equipment presented in this brochure may be part of a series, as an option, or it may not be available, depending on the versions. Manitou reserves the right, at any time and without notice, to amend the specifications described and represented. The specifications provided do not bind the manufacturer. For more details, please contact your Manitou agent. This is not a contractually binding document. The presentation of the products is not contractually binding. List of specifications non-exhaustive. The logos as well as the visual identity of the company are owned by Manitou and cannot be used without authorisation. All rights reserved. The photos and diagrams contained in this brochure are only provided for consultation and information purposes.

MANITOU BF SA - Limited company with board of directors - Share capital: 39,668,399 euros - 857 802 508 RCS Nantes