

Fiche technique :

# MAN'GO 12



 **MANITOU**  
HANDLING YOUR WORLD


| Capacities                                        |         | Métrique             |
|---------------------------------------------------|---------|----------------------|
| Working height                                    | h21     | 11.91 m              |
| Floor height (access)                             | h20     | 0.39 m               |
| Platform height                                   | h7      | 9.90 m               |
| Max. outreach                                     |         | 6.19 m               |
| Overhang                                          |         | 4.80 m               |
| Pendular arm rotation (top / bottom)              |         | +64 ° / -70 °        |
| Platform capacity                                 | Q       | 230 kg               |
| Turret rotation                                   |         | 350 °                |
| Platform rotation (right / left)                  |         | 70 ° / 66 °          |
| Number of people (indoor / outdoor)               |         | 2 / 2                |
| Weight and dimensions                             |         |                      |
| Platform weight*                                  |         | 4150 kg              |
| Platform dimensions (length x width)              | lp / ep | 1.50 m x 0.98 m      |
| Overall length                                    | l1      | 5.50 m               |
| Overall width                                     | b1      | 1.80 m               |
| Overall height                                    | h17     | 2.02 m               |
| Overall length (stowed)                           | l9      | 4.50 m               |
| Overall height (stowed)                           | h18     | 2.49 m               |
| Jib length                                        | l13     | 1.46 m               |
| Counterweight offset (turret at 90°)              | a7      | 0.19 m               |
| Internal turning radius / External turning radius | Wa3     | 1.71 m/4.11 m        |
| Ground clearance at centre of wheelbase           | m2      | 0.32 m               |
| Wheelbase                                         | y       | 2 m                  |
| Performances                                      |         |                      |
| Drive speed - stowed                              |         | 5.20 km/h            |
| Drive speed - raised                              |         | 1 km/h               |
| Gradeability                                      |         | 45 %                 |
| Permissible leveling                              |         | 4 °                  |
| Wheels                                            |         |                      |
| Tires type                                        |         | Solid Tires Cured-On |
| Standard tires                                    |         | 720 x 240 mm         |
| Drive wheels (front / rear)                       |         | 2 / 2                |
| Steering wheels (front / rear)                    |         | 2 / 0                |
| Braking wheels (front / rear)                     |         | 2 / 2                |
| Engine/Battery                                    |         |                      |
| Engine brand / model                              |         | Kubota - D1105-E4B   |
| Engine norm                                       |         | Stage V              |
| I.C. Engine power rating / Power                  |         | 24.80 Hp / 18.50 kW  |
| Miscellaneous                                     |         |                      |
| Ground Pressure                                   |         | 15 dan/cm2           |
| Hydraulic Pressure                                |         | 400 bar              |
| Hydraulic tank capacity                           |         | 60 l                 |
| Fuel tank                                         |         | 53 l                 |
| Noise to environment (LwA)                        |         | < 100 dB             |
| Vibration on hands/arms                           |         | < 0.76 m/s²          |
| Daily consumption **                              |         | 4.41 l               |

\*Varies according to options and standards of the country to which the machine is delivered

\*\* According to "REDUCE cycle"

MAN'GO 12 - Abaques

Load Chart for MEWP Metric

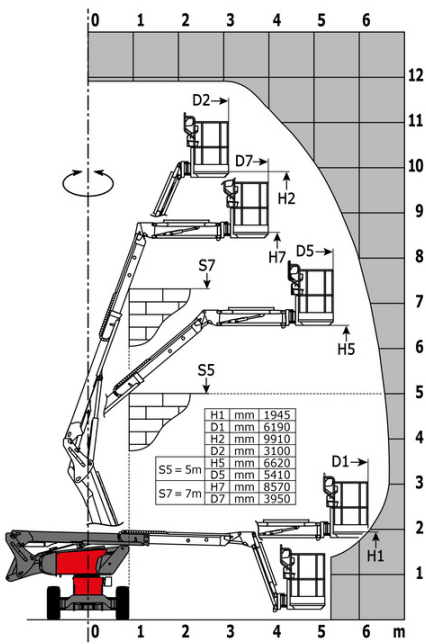

# Équipements

| Standard                                                                    |
|-----------------------------------------------------------------------------|
| 3 Simultaneous movements                                                    |
| Audible alarm and illuminated indicator lamp (leveling, overload, lowering) |
| Basket 1,500 mm                                                             |
| CAN bus technology                                                          |
| Dead man pedal                                                              |
| Differential locking                                                        |
| Easy Manager                                                                |
| Emergency stop button in platform and on frame                              |
| Fuel gauge with low level indicator                                         |
| Hom in the platform                                                         |
| Hour meter                                                                  |
| Leveling unlocking                                                          |
| Management via engine speed bearing                                         |
| Manual emergency lowering                                                   |
| Pendular arm                                                                |
| Proportional controls                                                       |
| Protective cover for control panel                                          |
| Quick access to components                                                  |
| Simplified lift control system                                              |
| Stop & Go system                                                            |

| Optionnel                                               |
|---------------------------------------------------------|
| 110 or 230V plug with differential circuit breaker      |
| Audio warning on all motion                             |
| Battery cut-off                                         |
| Biodegradable oil                                       |
| Catalytic cleaner                                       |
| Coded anti-start                                        |
| Cold weather protection oil                             |
| Highly capacity battery                                 |
| Initial verification report before putting into service |
| Key lock on turret cover                                |
| Lockable fuel cap                                       |
| Non-marking tyres                                       |
| On-board generator (3,5 or 5 kW)                        |
| SMS : Safe Man System                                   |
| Safety hamess                                           |
| Screen protection on the lower box control              |
| Spark arrester                                          |
| Water heater                                            |
| Water predisposition                                    |
| Working light                                           |

**Siège Social**

B.P. 249 - 430 rue de l'Aubinière

44150 Ancenis Cedex - France

Tel: +33 (0)2 40 09 10 11 - Fax: +33 (0)2 40 09 10 97

[www.manitou.com](http://www.manitou.com)

Cette publication présente le descriptif des versions et possibilités de configuration des produits Manitou qui peuvent différer en équipement. Les équipements présentés dans cette brochure peuvent être de série, en option, ou non disponibles suivant les versions. Manitou se réserve le droit, à tout moment et sans préavis, de modifier les spécifications décrites et représentées. Les spécifications portées n'engagent pas le constructeur. Pour plus de détails, contactez votre concessionnaire Manitou. Document non contractuel. Présentation des produits non contractuelle. Liste des spécifications non exhaustive. Les logos ainsi que l'identité visuelle de l'entreprise sont la propriété de Manitou et ne peuvent être utilisés sans autorisation. Tous droits réservés. Les photos et schémas contenus dans la présente brochure ne sont fournis qu'à des fins de consultation et à titre indicatif.

Manitou BF SA - Société anonyme à conseil d'administration - Capital social : 39 668 399 euros - 857 802 508 RCS Nantes