Technical sheet:

MLT-X 732







	MLT-X 732 Created on November /,	2025 at 5.12 AM 010	
Capacities	Me	etric	
Max. capacity	Q 320	0 kg	
Max. lifting height		0 m	
Maximum outreach		4 m	
Reach at max. height		0 m	
Breakout force with bucket) daN	
Weight and dimensions			
Unladen weight (with forks)	684	5 kg	
Ground clearance		5 m	
Wheelbase		1 m	
Overall length to carriage (with hitch)	·	4.74 m	
Overall length to carriage (without hitch)		4 m	
Front overhang		9 m	
Overall width		4 m	
Overall cab width		9 m	
Overall height		0 m	
Tilt-down angle		4 °	
Tilt-up angle		3 °	
External turning radius (over tyres)		2 m	
Standard tires		460/70 R24 159A8	
Drive wheels (front / rear)		/ 2	
Steering mode	Manicrab, 2 wheel steer,	4 wheel steer, Crab mode	
Performances			
Lifting	7.2	10 s	
Lowering	5.5	i0 s	
Extension	6.5	6.50 s	
Retraction	5.4	5.40 s	
Crowd	2.9	0 s	
Dump	2.8	10 s	
Engine			
Engine brand	Peri	Perkins	
Engine norm	Stag	Stage IIIA	
Max. fuel sulphur content	5000	5000 ppm	
Engine model		1104D-44T	
Number of cylinders - Capacity of cylinders	4 - 440	4 - 4400 cm³	
Engine power (Hp / kW)		95 Hp / 70 kW	
Max. torque / Engine rotation		392 Nm @1400 rpm	
Drawbar pull (Laden)		9000 daN	
Reversible fan		Option	
Transmission	op	Ораон	
Transmission type	Torrup	Torque converter	
Gearbox		Powershuttle	
		4 / 4	
Number of gears (forward / reverse)			
Max. travel speed (may vary according to applicable regulations)		27 km/h	
Differential lock		Limited slip differential on front axle	
Parking brake		Manual	
Service brake	Oil-immersed multi-dis	Oil-immersed multi-discs on front & rear axles	
Hydraulics			
Hydraulic pump type		Gear pump	
Hydraulic flow - Pressure	104 l/mir	104 l/min - 250 bar	
Tank capacities			
Hydraulic tank capacity		181	
Fuel	12	120 l	
Noise and vibration			
Noise at driving position (LpA) tested following NF EN 12053 norm	78	78 dB	
Noise to environment (LwA)	104	104 dB	
Vibration on hands/arms	< 2.50	< 2.50 m/s²	
Miscellaneous			
Tractor homologation			
Controls	J	SM	
	•		

MLT-X 732 - Dimensional drawing









MLT-X 732 - Load chart

Machine on tires with forks Metric

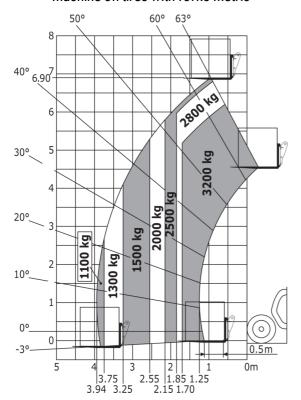

Machine on tires with forks LC 600 mm Metric

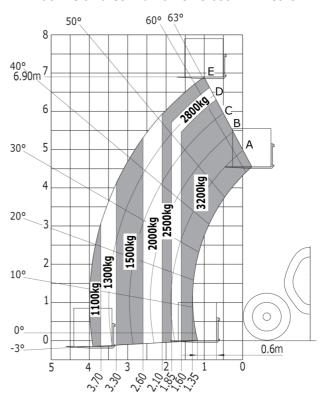





Head Office

B.P. 249 - 430 rue de l'Aubinière 44150 Ancenis Cedex - France Tel: +33 (0)2 40 09 10 11 - Fax: +33 (0)2 40 09 10 97 www.manitou.com



This publication provides a description of the configuration versions and options for Manitou products, which may differ for equipment. The equipment presented in this brochure may be part of a series, as an option, or it may not be available, depending on the versions. Manitou reserves the right, at any time and without notice, to amend the specifications described and represented. The specifications provided do not bind the manufacturer. For more details, please contact your Manitou agent. This is not a contractually binding document. The presentation of the products is not contractually binding. List of specifications non-exhaustive. The logos as well as the visual identity of the company are owned by Manitou and cannot be used without authorisation. All rights reserved. The photos and diagrams contained in this brochure are only provided for consultation and information purposes.

MANITOU BF SA - Limited company with board of directors - Share capital: 39,668,399 euros - 857 802 508 RCS Nantes