Технический паспорт ТЕХНИЧЕСКОЕ ОПИСАНИЕ :

CI 10

MANITOU
HANDLING YOUR WORLD

	Technical characteristics		Метрический
1.1	Manufacturer		MANITOU
1.2	Model Name		CI 10
1.3	Power source		Electrical
1.4	Operator type		Carried
1.5	Max. capacity	Q	1000 kg
1.6	Load center of gravity	c	600 mm
1.8	Load distance, centre of drive axle to fork	x	680 mm
1.9	Wheelbase	y	1950 mm
	Weight		
2.1	Service weight		1400 kg
2.2	Weight on front axle (laden) / rear axle (laden)		946 kg / 1454 kg
2.3	Weight on front axle (Unladen) / rear axle (Unladen)		896 kg / 504 kg
	Wheels		
3.1	Tires type		Bandage
3.2	Dimensions of front wheels		254x100 mm
3.3	Dimensions of rear wheels		85x90 mm
3.4	Additional wheels (dimensions)		140x50 mm
3.5.2	Number of drive wheels / front wheels / rear wheels		1x + 2 / 4
3.6	Front wheel gauge	b10	505 mm
3.7	Rear wheel gauge	b11	380 mm
	Dimensions		
4.8	Platform height	h7	130 mm
4.15	Fork height in low position	h13	80 mm
4.19	Overall length	l1	2628 mm
4.2	Mast lowered height	h1	1625 mm
4.20	Length to face of forks	l2	1458 mm
4.21	Overall width - Single wheels	b1	800 mm
4.21	Overall width	b1	800 m
4.22	Forks section / width / length	s / e / l	60 mm x 180 mm x 1170 mm
4.24	Fork carriage width	b3	760 mm
4.25	Fork spread	b5	560 mm
4.32	Ground clearance at centre of wheelbase	m2	20 mm
4.34	Aisle width for 800 x 1200 pallet lengthways	Ast	2878 mm
4.35	Turning radius	Wa	2158 mm
4.4	Mast lifting height	h3	800 mm
4.5	Mast extended height	h4	2345 mm
4.9	Height tiller max.	h14	1212 mm
	Performances		
5.1	Travel speed (laden / unladen)		10 km/h / 12 km/h
5.2	Lifting speed (laden / unladen)		0.08 m/s / 0.12 m/s
5.3	Lowering speed (laden / unladen)		0.14 m/s / 0.11 m/s
5.7	Gradeability (laden / unladen)		6 % / 10 %
5.10	Service brake		Electro magnetic
5.11	Parking brake		Butterfly switch release
	Engine		
6.1	Drive motor rating S2 60 min		2 kW
6.2	Lift motor rating at S3 15%		2 kW
6.3	Battery according to DIN 43531/35/36 A, B, C		Traction
6.4	Battery voltage / capacity		24 V / 465 Ah
6.5	Battery weight (+/- 5%)		435 kg
	Miscellaneous		
8.1	Type of drive control		AC
8.4	Measured/guaranteed mean noise level at the ear of the operator		< 70 dB

CI 10 - габаритный чертеж

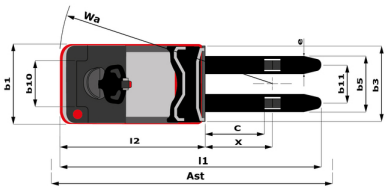

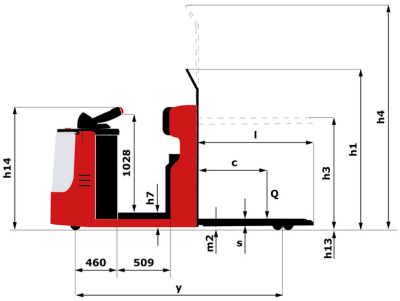

Головной офис
B.P. 249 - 430 rue de l'Aubinière
44150 Ancenis Cedex - France (Франция)
Телефон: 00 33 (0)2 40 09 10 11 - Факс: 00 33 (0)2 40 09 10 97
www.manitou.com

В данной брошюре описываются версии конфигурации и опции продуктов Manitou, которые могут отличаться в зависимости от оборудования. Описанное в данной брошюре оборудование может, в зависимости от версии, быть стандартным, опциональным или недоступным. Комания Manitou оставляет за собой право в любое время изменять приведенные и описанные характеристики без предварительного уведомления. Указанные технические характеристики не являются обязательными для производителя. Для получения дополнительной информации обратитесь к своему дилеру Manitou. Этот документ не имеет обязывающего, договорного характера. Описание продукции не имеет обязывающего, договорного характера. Список технических характеристик не является исчерпывающим. Логотипы и средства визуальной идентификации являются собственностью Manitou, их несанкционированное использование запрещено. Все права защищены. Фотографии и схемы в этой брошюре предоставлены только для ознакомления и в качестве справочной информации.
Manitou BF SA — Компания с ограниченной ответственностью и советом директоров – Акционерный капитал: 39 668 399 евро — Номер 857 802 508 в Реестре коммерсантов и предприятий Нанта