Technical sheet :








	Technical characteristics	
1.1	Manufacturer	
1.2	Model Name	
1.3	Power source	
1.4	Operator type	
1.5	Max. capacity	
1.6	Load center of gravity	
1.8	Distance from Load backrest to center of rear axle	
1.9	Wheelbase	
	Weight	
2.1	Service weight	
2.2	Weight on front axle (laden) / rear axle (laden)	
2.3	Weight on front axle (Unladen) / rear axle (Unladen)	
	Wheels	
3.1	Tires type	
3.3	Number of load wheels / Size of load wheels	
3.5	Number of front wheels / rear wheels	
3.5.2	Number of drive wheels / Size of drive wheels	
3.7	Rear wheel gauge	b
	Dimensions	
4.15	Fork height in low position	h
4.19	Overall length	
4.20	Length to face of forks	
4.21	Overall width	
4.22	Forks section / width / length	s /
4.24	Fork carriage width	
4.31	Ground clearance below mast	I
4.32	Ground clearance at centre of wheelbase	
4.35	Turning radius	
4.9	Height tiller min. / max.	h14
	Performances	
5.1	Travel speed (laden / unladen)	
5.2	Lifting speed (laden / unladen)	
5.3	Lowering speed (laden / unladen)	
5.8	Max Gradeability (laden / unladen)	
5.10	Service brake	
	Engine	
6.1	Drive motor rating S2 60 min	
6.2	Lift motor rating at S3 15%	
6.3	Battery according to DIN 43531/35/36 A, B, C	
6.4	Battery voltage / capacity	
6.5	Battery weight (+/- 5%)	
0.0	Miscellaneous	
8.1	Type of drive control	
8.4	Sound level at the driver's ear according to DIN 12 053	

ES-C 7	20 Created on 6 May 2024 at 9.48.22 UTC
	Metric
	Manitou
	ES-C 720
	Electrical
	Pedestrian
Q	2000 kg
С	500 mm
х	157 mm
у	1470 mm
	2600 kg
	610 kg / 3985 kg
	1500 kg / 1100 kg
	Polyurethane
	2 / 250x100
	1/2
	1/254x100
b11	1003 mm
h13	45 mm
11	2960 mm
12	1810 mm
b1	1120 mm
s / e / l	40 mm / 120 mm / 1150 mm
b3	750 mm
m1	31 mm
m2	62 mm
Wa	1826 mm
4 / h14	1405 mm / 1005 mm
	Charach / Charach
	6 km/h / 6 km/h 0.11 m/s / 0.20 m/s
	0.22 m/s / 0.21 m/s
	5 % / 8 %
	Electro magnetic
	2 kW
	4 kW
	DIN 43535-B
	24 V / 315 Ah
	275 kg
	DC
	65 dB

ES-C 720 - Dimensional drawing

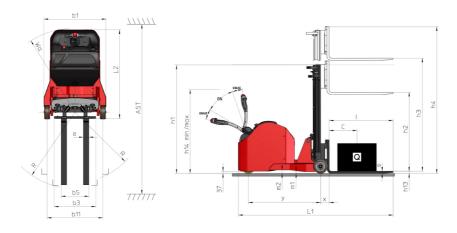

Characteristics of masts and residual capacities

Central Cylinder Simplex (CCS)		CCS 15	CCS 17
h1 - Mast lowered height	mm	1955	2205
h2 - Mast free lift	mm	1465	1715
h3 - Mast lifting height	mm	1465	1715
h4 - Mast extended height	mm	2030	2280
Residual capacity at max height	kg	2000	2000

Full Visibility Duplex (FVD)		FVD 29	FVD 34	FVD 38
Mast/fork carriage tilt, forward	۰	3	3	3
h1 - Mast lowered height	mm	1955	2205	2405
h3 - Mast lifting height	mm	2890	3390	3790
h4 - Mast extended height	mm	3455	3955	4355
Residual capacity at max height	kg	2000	2000	1600

Free Lift Duplex (FLD)		FLD 29	FLD 34
h1 - Mast lowered height	mm	1955	2205
h2 - Mast free lift	mm	1465	1715
h3 - Mast lifting height	mm	2890	3390
h4 - Mast extended height	mm	3455	3955
Residual capacity at max height	kg	2000	2000

Free Lift Triplex (FLT)		FLT 42	FLT 47	FLT 54
h1 - Mast lowered height	mm	1915	2075	2315
h2 - Mast free lift	mm	1425	1585	1835
h3 - Mast lifting height	mm	4205	4685	5415
h4 - Mast extended height	mm	4770	5250	5980
Residual capacity at max height	kg	1300	1050	850



Head Office B.P. 249 - 430 rue de l'Aubinière 44150 Ancenis Cedex - France Tel: +33 (0)2 40 09 10 11 - Fax: +33 (0)2 40 09 10 97 www.manitou.com



This publication provides a description of the configuration versions and options for Manitou products, which may differ for equipment. The equipment presented in this brochure may be part of a series, as an option, or it may not be available, depending on the versions. Manitou reserves the right, at any time and without notice, to amend the specifications described and represented. The specifications provided do not bind the manufacturer. For more details, please contact your Manitou agent. This is not a contractually binding document. The presentation of the products is not contractually binding. List of specifications non-exhaustive. The logos as well as the visual identity of the company are owned by Manitou and cannot be used without authorisation. All rights reserved. The photos and diagrams contained in this brochure are only provided for consultation and information purposes.

MANITOU BF SA - Limited company with board of directors - Share capital: 39,668,399 euros - 857 802 508 RCS Nantes