

Scheda tecnica :


# ME 418



 **MANITOU**  
HANDLING YOUR WORLD

|       | Technical characteristics                                       |           | Metrico                  |
|-------|-----------------------------------------------------------------|-----------|--------------------------|
| 1.1   | Manufacturer                                                    |           | Manitou                  |
| 1.2   | Model Name                                                      |           | ME 418                   |
| 1.3   | Power source                                                    |           | Electrical               |
| 1.4   | Operator type                                                   |           | Seated                   |
| 1.5   | Max. capacity                                                   | Q         | 1800 kg                  |
| 1.6   | Load center of gravity                                          | c         | 500 mm                   |
| 1.8   | Load distance, centre of drive axle to fork                     | x         | 411 mm                   |
| 1.9   | Wheelbase                                                       | y         | 1380 mm                  |
|       | Weight                                                          |           |                          |
| 2.1   | Service weight                                                  |           | 3070 kg                  |
| 2.2   | Weight on front axle (laden) / rear axle (laden)                |           | 4350 kg / 520 kg         |
| 2.3   | Weight on front axle (Unladen) / rear axle (Unladen)            |           | 1400 kg / 1670 kg        |
|       | Wheels                                                          |           |                          |
| 3.1   | Tires type                                                      |           | Solid tires              |
| 3.2   | Dimensions of front wheels                                      |           | 21 x 8-9                 |
| 3.3   | Dimensions of rear wheels                                       |           | 5.00-8                   |
| 3.5   | Number of front wheels / rear wheels                            |           | 2 / 2                    |
| 3.5.2 | Number of drive wheels                                          |           | 2                        |
| 3.6   | Front wheel gauge                                               | b10       | 938 mm                   |
| 3.7   | Rear wheel gauge                                                | b11       | 898 mm                   |
|       | Dimensions                                                      |           |                          |
| 4.7   | Height of overhead guard (cabin)                                | h6        | 2130 mm                  |
| 4.8   | Seat height/stand height                                        | h7        | 1045 mm                  |
| 4.12  | Height of towing bar (coupling height)                          | h10       | 275 mm                   |
| 4.19  | Overall length                                                  | l1        | 3248 mm                  |
| 4.20  | Length to face of forks                                         | l2        | 2098 mm                  |
| 4.21  | Overall width                                                   | b1        | 1138 mm                  |
| 4.22  | Forks section / width / length                                  | s / e / l | 100 mm x 1150 mm x 35 mm |
| 4.23  | Fork carriage ISO 2328 (class/form) A/B                         |           | 2A                       |
| 4.24  | Fork carriage width                                             | b3        | 1000 mm                  |
| 4.31  | Ground clearance below mast                                     | m1        | 100 mm                   |
| 4.32  | Ground clearance at centre of wheelbase                         | m2        | 110 mm                   |
| 4.33  | Aisle Width for pallets 1000 x 1200 crossways                   | Ast       | 3511 mm                  |
| 4.34  | Aisle width for 800 x 1200 pallet lengthways                    | Ast       | 3711 mm                  |
| 4.35  | Turning radius                                                  | Wa        | 1900 mm                  |
| 4.36  | Internal turning radius (over tyres)                            | b13       | 680 mm                   |
|       | Performances                                                    |           |                          |
| 5.1   | Travel speed (laden / unladen)                                  |           | 13.50 km/h-14 km/h       |
| 5.2   | Lifting speed (laden / unladen)                                 |           | 0.29 m/s-0.44 m/s        |
| 5.3   | Lowering speed (laden / unladen)                                |           | 0.49 m/s-0.48 m/s        |
| 5.5   | Drawbar pull (Laden / Unladen)                                  |           | 1200 daN / 1100 daN      |
| 5.7   | Gradeability (laden / unladen)                                  |           | 12 % / 13 %              |
| 5.10  | Service brake                                                   |           | Hydraulic                |
|       | Engine                                                          |           |                          |
| 6.1   | Drive motor rating S2 60 min                                    |           | 8 kW                     |
| 6.2   | Lift motor rating at S3 15%                                     |           | 8.60 kW                  |
| 6.3   | Battery according to DIN 43531/35/36 A, B, C                    |           | DIN43531 A               |
| 6.4   | Battery voltage / capacity                                      |           | 48 V / 465 Ah            |
| 6.6   | Energy consumption                                              |           | 4.60 kWh                 |
|       | Miscellaneous                                                   |           |                          |
| 8.1   | Type of drive control                                           |           | Electronic               |
| 8.2   | Working hydraulic pressure for attachments                      |           | 175 bar                  |
| 8.3   | Oil flow rate for attachments                                   |           | 35 l/min                 |
| 8.4   | Measured/guaranteed mean noise level at the ear of the operator |           | < 71 dB                  |
| 8.4   | Sound level at the driver's ear according to DIN 12 053         |           | 71 dB                    |

ME 418 - Disegno quotato

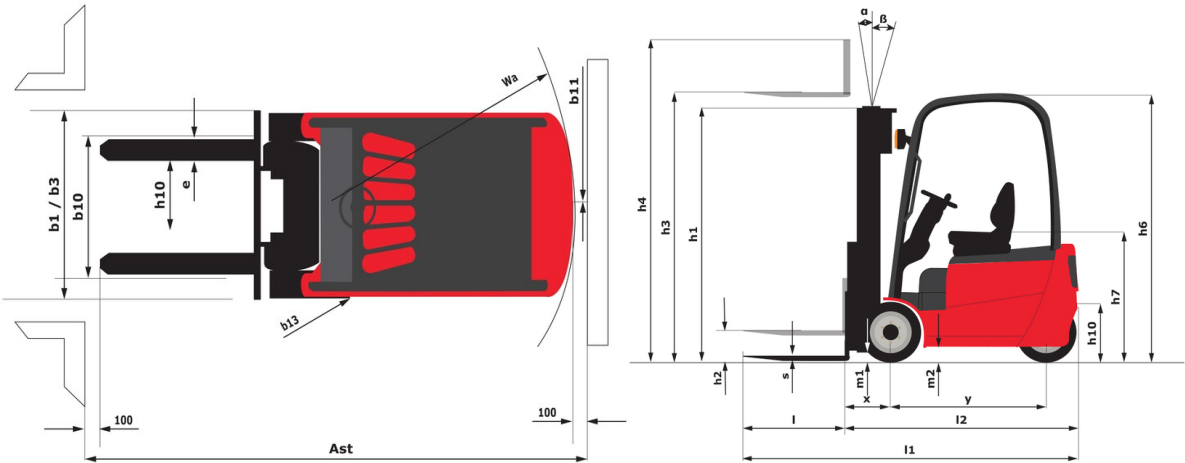

| Full Visibility Duplex (FVD)                               |    | FVD 27 | FVD 30 | FVD 33 | FVD 36 | FVD 40 | FVD 43 | FVD 45 |
|------------------------------------------------------------|----|--------|--------|--------|--------|--------|--------|--------|
| Mast/fork carriage tilt, forward                           | °  | 5      | 5      | 5      | 5      | 5      | 5      | 5      |
| Mast/fork carriage tilt, backward                          | °  | 6      | 10     | 10     | 10     | 10     | 6      | 6      |
| h1 - Mast lowered height                                   | mm | 1825   | 1975   | 2125   | 2325   | 2575   | 2725   | 2825   |
| h2 - Mast free lift                                        | mm | 145    | 145    | 145    | 145    | 145    | 145    | 145    |
| h3 - Mast lifting height                                   | mm | 2700   | 3000   | 3300   | 3600   | 4000   | 4300   | 4500   |
| h4 - Mast extended height                                  | mm | 3265   | 3565   | 3865   | 4165   | 4565   | 4865   | 5065   |
| Residual capacity at max height                            | kg | 1800   | 1800   | 1800   | 1800   | 1800   | 1700   | 1650   |
| Residual capacity with integrated side shift at max height | kg | 1800   | 1800   | 1800   | 1800   | 1750   | 1650   | 1600   |
| Residual capacity with hooked-on side shift at max height  | kg | 1800   | 1800   | 1800   | 1700   | 1650   | 1550   | 1500   |
| Height at max capacity                                     | mm | 2700   | 3000   | 3300   | 3600   | 4000   | 4300   | 2500   |
| Height at max capacity with integrated sideshift           | mm | 2700   | 3000   | 3300   | 3600   | 4000   |        |        |

| Free Lift Duplex (FLD)                                     |    | FLD 27 | FLD 30 | FLD 33 | FLD 36 | FLD 40 |
|------------------------------------------------------------|----|--------|--------|--------|--------|--------|
| Mast/fork carriage tilt, forward                           | °  | 5      | 5      | 5      | 5      | 5      |
| Mast/fork carriage tilt, backward                          | °  | 6      | 10     | 10     | 10     | 10     |
| h1 - Mast lowered height                                   | mm | 1825   | 1975   | 2125   | 2275   | 2525   |
| h2 - Mast free lift                                        | mm | 1240   | 1390   | 1540   | 1690   | 1940   |
| h3 - Mast lifting height                                   | mm | 2700   | 3000   | 3300   | 3600   | 4000   |
| h4 - Mast extended height                                  | mm | 3295   | 3595   | 3895   | 4195   | 4595   |
| Residual capacity at max height                            | kg | 1800   | 1800   | 1800   | 1800   | 1800   |
| Residual capacity with integrated side shift at max height | kg | 1800   | 1800   | 1800   | 1800   | 1750   |
| Residual capacity with hooked-on side shift at max height  | kg | 1800   | 1800   | 1800   | 1700   | 1650   |
| Height at max capacity                                     | mm | 2700   | 3000   | 3300   | 3600   | 4000   |
| Height at max capacity with integrated sideshift           | mm | 2700   | 3000   | 3300   | 3600   | 4000   |

[illegible]



**Sede centrale**

MANITOU ITALIA Srl

Via Cristoforo Colombo 2, Loc. Cavazzona - 41013 CASTELFRANCO EMILIA (MO)

Tel: 059.95.98.11 - Fax 059.95.98.65

[www.manitou.com](http://www.manitou.com)



Questa pubblicazione presenta la descrizione delle versioni e delle possibilità di configurazione dei prodotti Manitou, che possono differire per attrezzature. Gli allestimenti presentati nel presente opuscolo possono essere di serie, optional o non disponibili, a seconda delle versioni. Manitou si riserva il diritto di modificare, in qualsiasi momento e senza alcun preavviso, le specifiche tecniche descritte e rappresentate. Le specifiche indicate non rappresentano alcun obbligo per il costruttore. Per maggiori dettagli, rivolgersi al proprio concessionario Manitou. Documento non contrattuale. Elenco delle specifiche non esaustivo. I loghi nonché l'identità visiva dell'azienda sono di proprietà di Manitou e non possono essere utilizzati senza autorizzazione. Tutti i diritti riservati. Le immagini e gli schemi contenuti nel presente opuscolo sono forniti esclusivamente a fini di consultazione e a titolo indicativo.

Manitou BF SA - Società anonima con consiglio di amministrazione. Capitale sociale: 39,668,399 euro - 857 802 508 RCS Nantes