

Technical sheet :


# MSI 25 ST5



 **MANITOU**  
HANDLING YOUR WORLD

Technical characteristics		Metric	
1.1	Manufacturer	Manitou	
1.2	Model Name	MSI 25 ST5	
1.3	Power source	Diesel	
1.4	Operator type	Seated	
1.5	Max. capacity	2500 kg	
1.6	Load center of gravity	500 mm	
1.8	Load distance, centre of drive axle to fork	621 mm	
1.9	Wheelbase	1900 mm	
	Standard mast reference of the machine	FVD 33	
Weight		Weight	
2.1	Service weight	3900 kg	
2.2	Weight on front axle (laden) / rear axle (laden)	5730 kg / 670 kg	
2.3	Weight on front axle (Unladen) / rear axle (Unladen)	1590 kg / 2310 kg	
Wheels		Wheels	
3.1	Tires type	Pneumatic	
3.2	Dimensions of front wheels	300-15/18 6T P43	
3.3	Dimensions of rear wheels	7.00-12/12 ED PLUS	
3.5	Number of front wheels / rear wheels	2 / 2	
3.5.2	Number of drive wheels	2	
3.6	Front wheel gauge	1044 mm	
3.7	Rear wheel gauge	1108 mm	
Dimensions		Dimensions	
4.8	Seat height/stand height	972 mm	
4.7	Height of overhead guard (cabin) / Overall height of low overhead guard (Buggy version)	2095 mm / 1930 mm	
4.19	Overall length	4193 mm	
4.20	Length to face of forks	2993 mm	
4.21	Overall width	1330 mm	
4.22	Forks section / width / length	40 mm x 100 mm x 1200 mm	
4.23	Fork carriage ISO 2328 (class/form) A/B	2A	
4.24	Fork carriage width	1260 mm	
4.31	Ground clearance below mast	260 mm	
4.32	Ground clearance at centre of wheelbase	238 mm	
4.33	Aisle Width for pallets 1000 x 1200 crossways	4641 mm	
4.35	Turning radius	2620 mm	
Performances		Performances	
5.1	Travel speed (laden / unladen)	21 km/h-21 km/h	
5.2	Lifting speed (laden / unladen)	0.50 m/s-0.50 m/s	
5.3	Lowering speed (laden / unladen)	0.50 m/s-0.30 m/s	
5.5	Drawbar pull (Laden)	1900 daN	
5.7	Gradeability (laden)	31 %	
5.10	Service brake	Hydraulic brakes by loss of pressure	
	Transmission type	Hydrostatic	
Engine		Engine	
7.1	Engine brand / model / norm	Kubota / D1803 CRT E5B / Stage V	
7.2	Engine power (Hp / kW)	50 Hp/37 kW	
7.3	Rated speed	2700 rpm	
7.4	Number of cylinders / Capacity of cylinders	3 - 1826 cm <sup>3</sup>	
Miscellaneous		Miscellaneous	
8.1	Type of drive control	Electronic	
8.2	Working hydraulic pressure for attachments	220 bar	
8.3	Oil flow rate for attachments	45 l/min	
8.4	Sound level at the driver's ear according to DIN 12 053	81 dB	

## MSI 25 ST5 - Dimensional drawing

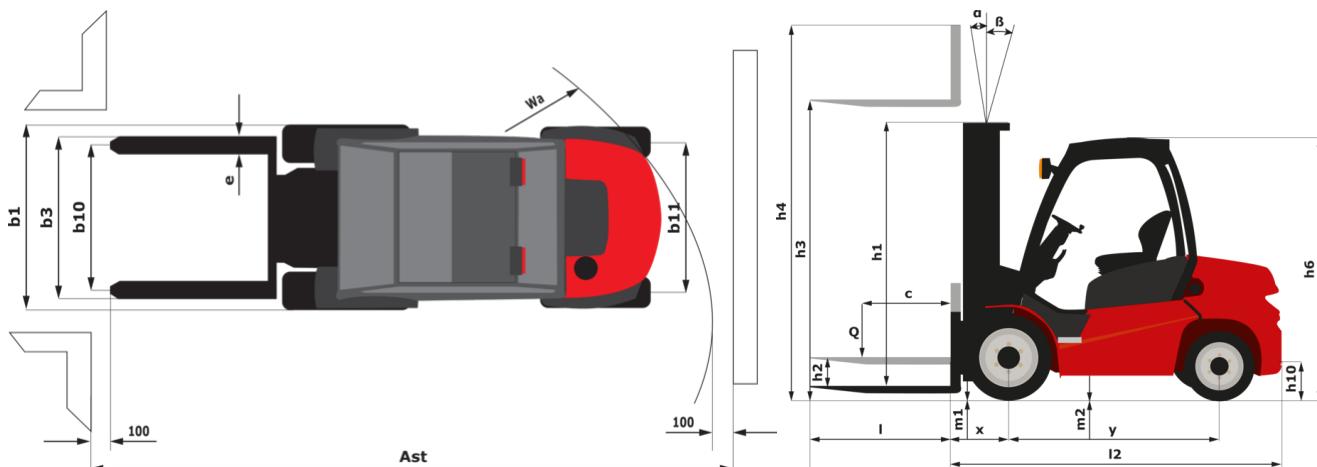

## Characteristics of masts and residual capacities

Full Visibility Duplex (FVD)	FVD 30	FVD 33	FVD 37	FVD 40	FVD 45
α - Mast/fork carriage tilt, forward	°	12	12	12	12
β - Mast/fork carriage tilt, backward	°	10	10	10	10
h1 - Mast lowered height	mm	2136	2286	2546	2736
h2 - Mast free lift	mm	85	85	85	85
h3 - Mast lifting height	mm	3000	3300	3700	4000
h4 - Mast extended height	mm	3738	4038	4438	4738
Residual capacity at max height	kg	2500	2500	2500	2500
Residual capacity with hooked-on side shift at max height	kg	2500	2500	2500	2500
Height at max capacity	mm	3000	3300	3700	4000
Height at max capacity with hooked-on sideshift	mm	3000	3300	3700	4000

Free Lift Triplex (FLT)	FLT 34	FLT 37	FLT 40	FLT 43	FLT 47	FLT 55	FLT 60
α - Mast/fork carriage tilt, forward	°	12	12	12	12	6	6
β - Mast/fork carriage tilt, backward	°	10	10	10	10	6	6
h1 - Mast lowered height	mm	1936	2036	2136	2286	2386	2736
h2 - Mast free lift	mm	1183	1283	1383	1483	1633	1893
h3 - Mast lifting height	mm	3400	3700	4000	4300	4700	5500
h4 - Mast extended height	mm	4184	4484	4784	5116	5484	6356
Residual capacity at max height	kg	2500	2500	2500	2500	2500	2300
Residual capacity with hooked-on side shift at max height	kg	2500	2500	2500	2500	2500	2300
Height at max capacity	mm	3400	3700	4000	4300	4700	5200
Height at max capacity with hooked-on sideshift	mm	3400	3700	4000	4300	4700	5200

Full Visibility Triplex (FVT)	FVT 33	
α - Mast/fork carriage tilt, forward	°	12
β - Mast/fork carriage tilt, backward	°	10
h1 - Mast lowered height	mm	1826
h2 - Mast free lift	mm	72
h3 - Mast lifting height	mm	3300
h4 - Mast extended height	mm	4027
Height at max capacity	mm	2500



# **MANITOU** HANDLING YOUR WORLD

## Head Office

B.P. 249 - 430 rue de l'Aubinière

44150 Ancenis Cedex - France

Tel: +33 (0)2 40 09 10 11 - Fax: +33 (0)2 40 09 10 97

[www.manitou.com](http://www.manitou.com)



This publication provides a description of the configuration versions and options for Manitou products, which may differ for equipment. The equipment presented in this brochure may be part of a series, as an option, or it may not be available, depending on the versions. Manitou reserves the right, at any time and without notice, to amend the specifications described and represented. The specifications provided do not bind the manufacturer. For more details, please contact your Manitou agent. This is not a contractually binding document. The presentation of the products is not contractually binding. List of specifications non-exhaustive. The logos as well as the visual identity of the company are owned by Manitou and cannot be used without authorisation. All rights reserved. The photos and diagrams contained in this brochure are only provided for consultation and information purposes.

MANITOU BF SA - Limited company with board of directors - Share capital: 39,668,399 euros - 857 802 508 RCS Nantes