

Technical sheet :

# 4200V



---



 **MANITOU**  
HANDLING YOUR WORLD

Capacities		Imperial
Rated Operating Capacity		4200 lb
Unladen weight		11665 lb
Weight and dimensions		
Wheelbase	y	55 in
Overall Operating Height - Fully Raised	h27	187 in
Height to Hinge Pin - Fully Raised	h28	144 in
Overall Height to top of ROPS	h17	82 in
Dump angle at full height	a5	31 °
Dump height	h29	115 in
Overall length with bucket	l16	159 in
Dump reach - Full height	r6	39 in
Rollback at ground	a13	31 °
Seat to ground height	h30	41 in
Overall width less bucket	b1	79 in
Bucket Width	e1	84 in
Ground clearance	m4	7 in
Overall length - Less Bucket	l2	121 in
Departure angle	a2	19 °
Clearance Radius - Front with Bucket	b18	89 in
Performances		
Travel speed (unladen)		7 mph
Travel Speed with Two-Speed Option - Maximum		12 mph
Wheels		
Standard tires		14.00 x 17.5 HD
Engine		
Engine brand		Deutz
Engine model		TCD 3.6
Max. torque / Engine rotation		326 ft/lbs / 2200 rpm
Power source		Diesel
Engine power (Hp / kW)		132 Hp / 97.20 kW
Battery voltage		12 V
Alternator		130 kW
Starter		2.30 kW
Hydraulics		
High-Flow Auxiliary Hydraulics - Option		41 US gpm
Tank capacities		
Fuel tank capacity		10 US gal
Hydraulic tank capacity		17 US gal
Displacement		0.95 US gal
Noise and vibration		
Noise to environment (LwA)		101 dB
Noise at driving position (LpA)		85 dB
Whole-Body Vibration (ISO 2631-1)		3 ft/s <sup>2</sup>
Vibration on hands/arms		< 4 ft/s <sup>2</sup>

### 4200V - Dimensional drawing

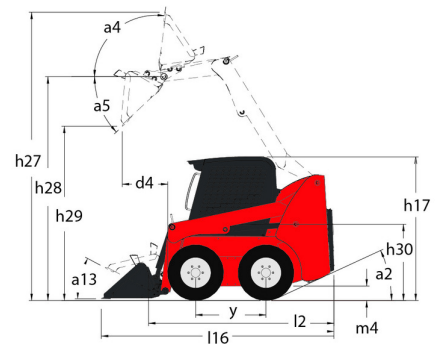

# Equipment

—	
Integral Access Plate (removable)	Standard
<b>Lifting function</b>	
All-Tach® Attachment Mounting System	Standard
Auxiliary Hydraulics	Standard
High-Flow Auxiliary Hydraulics	Standard
Power-A-Tach® Attachment Mounting System	Standard
<b>Lighting</b>	
Work Lights - Front and Rear	Standard
<b>Motorization/Power</b>	
Engine Auto-Shutdown System	Standard
Engine Block Heater	Standard
Swing-Out Cooler	Standard
Turbo-Charged Engine	Standard
Two-Speed Drive	Standard
<b>Operator station</b>	
Adjustable Arm Rests / Control Towers 1	Standard
Air conditioning with manual adjustment	Standard
Air suspension seat	Standard
Cab Enclosure	Optional
Foot and Hand Throttles 2	Standard
Heating	Standard
High-Back Adjustable Seat	Standard
Hom	Standard
Joystick controls	Standard
ROPS/FOPS Level II Overhead Guard	Standard
<b>Other options</b>	
Hydrostatic Drive - Servo	Standard
Selectable Self-Leveling Hydraulic Lift Action 4	Standard
<b>Secondary functions</b>	
Full Instrumentation	Standard
Hydraglide™ Ride Control 3	Standard
<b>Security</b>	
Anti-Vandalism Protection	Standard
Back-Up Alarm	Standard
Brake Control (Auto / Manual)	Standard
Hyaloc™ Safety System	Standard
Lift Arm Support Device	Standard
Operator Restraint Bar	Standard

**Head Office**

B.P. 249 - 430 rue de l'Aubinière  
44150 Ancenis Cedex - France

Tel: +33 (0)2 40 09 10 11 - Fax: +33 (0)2 40 09 10 97

[www.manitou.com](http://www.manitou.com)



This publication provides a description of the configuration versions and options for Manitou products, which may differ for equipment. The equipment presented in this brochure may be part of a series, as an option, or it may not be available, depending on the versions. Manitou reserves the right, at any time and without notice, to amend the specifications described and represented. The specifications provided do not bind the manufacturer. For more details, please contact your Manitou agent. This is not a contractually binding document. The presentation of the products is not contractually binding. List of specifications non-exhaustive. The logos as well as the visual identity of the company are owned by Manitou and cannot be used without authorisation. All rights reserved. The photos and diagrams contained in this brochure are only provided for consultation and information purposes.

MANITOU BF SA - Limited company with board of directors - Share capital: 39,668,399 euros - 857 802 508 RCS Nantes