

Technical sheet :


# MC 18-2 ST5



 **MANITOU**  
HANDLING YOUR WORLD

Technical characteristics		Metric	
1.1	Manufacturer	Manitou	
1.2	Model Name	MC 18-2 ST5	
1.3	Power source	Diesel	
1.4	Operator type	Seated	
1.5	Max. capacity	1800 kg	
1.6	Load center of gravity	500 mm	
1.8	Load distance, centre of drive axle to fork	616 mm	
1.9	Wheelbase	1900 mm	
Weight		FVD 33	
2.1	Standard mast reference of the machine	3440 kg	
2.2	Service weight	4600 kg / 640 kg	
2.3	Weight on front axle (laden) / rear axle (laden)	1590 kg / 1850 kg	
Wheels		Pneumatic	
3.1	Tires type	12.5/80 - 18/12 SL R4	
3.2	Dimensions of front wheels	7.00-12/12 ED PLUS	
3.3	Dimensions of rear wheels		
3.5	Number of front wheels / rear wheels	2 / 2	
3.5.2	Number of drive wheels	2	
3.6	Front wheel gauge	1159 mm	
3.7	Rear wheel gauge	1112 mm	
Dimensions		2155 mm / 1990 mm	
4.7	Height of overhead guard (cabin) / Overall height of low overhead guard (Buggy version)	1034 mm	
4.8	Seat height/stand height	4100 mm	
4.19	Overall length	2950 mm	
4.20	Length to face of forks	1450 mm	
4.21	Overall width	35 mm x 100 mm / 1150 mm	
4.22	Forks section x width x length	2A	
4.23	Fork carriage ISO 2328 (class/form) A/B	1260 mm	
4.24	Fork carriage width	300 mm	
4.31	Ground clearance below mast	320 mm	
4.32	Ground clearance at centre of wheelbase	2585 mm	
Performances		12 km/h / 23.50 km/h	
5.1	Travel speed (laden / unladen)	0.44 m/s / 0.44 m/s	
5.2	Lifting speed (laden / unladen)	0.40 m/s / 0.40 m/s	
5.3	Lowering speed (laden / unladen)	1000 daN	
5.5	Drawbar pull (Laden)	19 %	
5.7	Gradeability (laden)	Hydraulic brakes by loss of pressure	
5.10	Service brake	Hydrostatic	
Engine		Kubota / D1803 CR E5B / Stage V	
7.1	Engine brand / model / norm	37 Hp/27 kW	
7.2	Engine power (Hp / kW)	2700 rpm	
7.3	Rated speed	3 - 1826 cm <sup>3</sup>	
7.4	Number of cylinders / Capacity of cylinders		
Miscellaneous		Electronic	
8.1	Type of drive control	160 bar	
8.2	Working hydraulic pressure for attachments	31 l/min	
8.3	Oil flow rate for attachments		

## MC 18-2 ST5 - Dimensional drawing

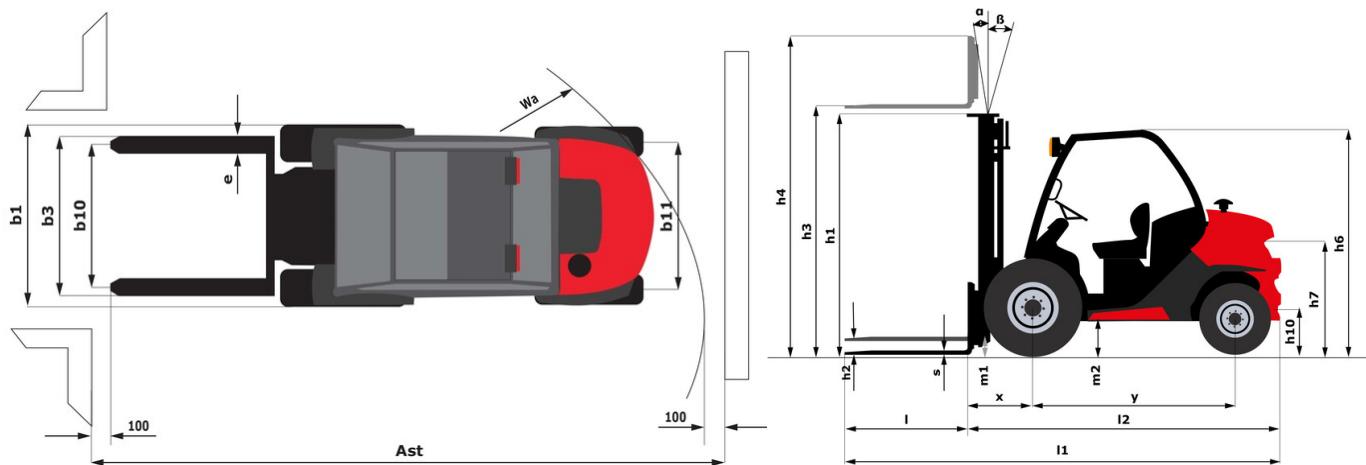

## Characteristics of masts and residual capacities

Full Visibility Duplex (FVD)	
α - Mast/fork carriage tilt, forward	°
β - Mast/fork carriage tilt, backward	°
h1 - Mast lowered height	mm
h2 - Mast free lift	mm
h3 - Mast lifting height	mm
h4 - Mast extended height	mm
Residual capacity at max height	kg
Residual capacity with hooked-on side shift at max height	kg
Height at max capacity	mm
Height at max capacity with hooked-on sideshift	mm

FVD 33	FVD 37	FVD 40	FVD 45
12	12	12	12
10	10	10	10
2348	2608	2798	3048
85	85	85	85
3300	3700	4000	4500
4018	4428	4768	5268
1800	1800		1100
1800	1800		1100
3300	3700	2500	3600
3300	3700		3600

Free Lift Triplex (FLT)	
α - Mast/fork carriage tilt, forward	°
β - Mast/fork carriage tilt, backward	°
h1 - Mast lowered height	mm
h2 - Mast free lift	mm
h3 - Mast lifting height	mm
h4 - Mast extended height	mm
Residual capacity at max height	kg
Residual capacity with hooked-on side shift at max height	kg
Height at max capacity	mm
Height at max capacity with hooked-on sideshift	mm

FLT 37	FLT 43	FLT 47	FLT 55
12	12	12	6
10	10	10	6
1998	2198	2348	2608
1305	1505	1655	1915
3700	4300	4700	5500
4453	5053	5453	6253
1600	1000	600	
1550	1000	600	
3400	3400	3400	2500
3300	3400	3400	

Full Visibility Triplex (FVT)	
α - Mast/fork carriage tilt, forward	°
β - Mast/fork carriage tilt, backward	°
h1 - Mast lowered height	mm
h2 - Mast free lift	mm
h3 - Mast lifting height	mm
h4 - Mast extended height	mm
Residual capacity at max height	kg
Residual capacity with hooked-on side shift at max height	kg
Height at max capacity	mm
Height at max capacity with hooked-on sideshift	mm

FVT 33
12
10
1888
135
3300
4048
1800
1800
3300
3300

**Head Office**

B.P. 249 - 430 rue de l'Aubinière  
44150 Ancenis Cedex - France  
Tel: +33 (0)2 40 09 10 11 - Fax: +33 (0)2 40 09 10 97  
[www.manitou.com](http://www.manitou.com)



This publication provides a description of the configuration versions and options for Manitou products, which may differ for equipment. The equipment presented in this brochure may be part of a series, as an option, or it may not be available, depending on the versions. Manitou reserves the right, at any time and without notice, to amend the specifications described and represented. The specifications provided do not bind the manufacturer. For more details, please contact your Manitou agent. This is not a contractually binding document. The presentation of the products is not contractually binding. List of specifications non-exhaustive. The logos as well as the visual identity of the company are owned by Manitou and cannot be used without authorisation. All rights reserved. The photos and diagrams contained in this brochure are only provided for consultation and information purposes.

MANITOU BF SA - Limited company with board of directors - Share capital: 39,668,399 euros - 857 802 508 RCS Nantes