

Technical sheet :

# AETJ 49

OXYGEN  
by MANITOU




 **MANITOU**  
HANDLING YOUR WORLD

Capacities		Imperial
Working height	h21	55 ft 5 in
Platform height	h7	48 ft 11 in
Maximum outreach		30 ft 11 in
Overhang		23 ft
Pendular arm rotation (top / bottom)		+65 ° / -65 °
Platform capacity	Q	500 lb
Turret rotation		355 °
Platform rotation (right / left)		66 ° / 59 °
Number of people (indoor / outdoor)		2 / 2
Weight and dimensions		
Platform weight*		15642 lb
Platform dimensions (length x width)	lp / ep	3 ft 11 in x 3 ft
Floor height (access)	h20	1 ft 4 in
Overall length	l1	22 ft 5 in
Overall width	b1	5 ft 9 in
Overall height	h17	6 ft 6 in
Overall length (stowed)	l9	16 ft 10 in
Overall height (stowed)	h18 ***	6 ft 8 in
Jib length	l13	4 ft 2 in
Counterweight offset (turret at 90°)	a7	3 in
Counterweight Oversize / Reach		3 in
External turning radius	Wa3	14 ft 1 in
Ground clearance at centre of wheelbase	m2	6 in
Wheelbase	y	6 ft 7 in
Performances		
Drive speed - stowed		3 mph
Drive speed - raised		0.37 mph
Gradeability		22 %
Permissible leveling		3 °
Wheels		
Tires type		Non marking cushion
Standard tires		24 x 7.5 in / 600 x 190 mm
Drive wheels (front / rear)		0 / 2
Steering wheels (front / rear)		2 / 0
Braking wheels (front / rear)		0 / 2
Engine/Battery		
Drive motor power rating		2 x 4.50 kW
Lift motor power		3.70 kW
Battery voltage		48 V
Battery nominal voltage / capacity		48 V / 240 Ah
Battery energy		11 kWh
On-board charger (V / A)		48 V / 30 A
Miscellaneous		
Number of cycles with STD Battery (HIRD)		44
Ground Pressure		241 PSI
Hydraulic Pressure		3046 PSI
Hydraulic tank capacity		4 US gal
Vibration on hands/arms		< 2 ft/s²
Standards compliance		
This machine is in compliance with:		ANSI A92.20-2018 CSA B354.6 ICES-002-Issue 6 Standard Canadian EMC

\*Varies according to options and standards of the country to which the machine is delivered

# AETJ 49 - Load chart

## Load Chart imperial

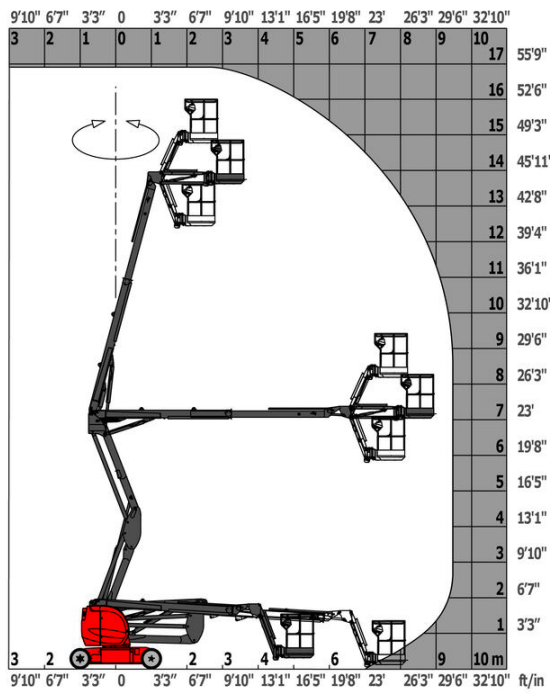

# AETJ 49 - Dimensional drawing



# Equipment

---

## Standard

Additional foot-operated hom  
Audible alarm and illuminated indicator lamp (leveling, overload, lowering)  
Battery charge indicator lamp  
CAN bus technology  
Electric plug - 110V - In the basket - With differential circuit breaker - USA (B) type  
Electric predisposition on boom  
Emergency stop button in platform and on frame  
Hour meter  
Integrated diagnostic assistance  
Manual emergency lowering  
Multi-voltage onboard charger - 48V - 35A - ZIVAN - Gel - Single-phase  
Negative-type braking on rear wheels  
Non-marking rubber tyres  
Proportional controls  
Side swing gate  
Slinging and securing rings  
Toolbox  
Traction battery  
Travel possible at maximum height  
Turret orientation detector

## Optional

Basket controls protection  
Biodegradable oil  
Cold environment package  
Cold weather protection oil  
Higher capacity battery, to start the machine easily in cold countries.  
Lights  
Safe Man System (SMS)  
Water pre-fitting  
Working headlight in platform

**Head Office**

B.P. 249 - 430 rue de l'Aubinière  
44150 Ancenis Cedex - France

Tel: +33 (0)2 40 09 10 11 - Fax: +33 (0)2 40 09 10 97

[www.manitou.com](http://www.manitou.com)



This publication provides a description of the configuration versions and options for Manitou products, which may differ for equipment. The equipment presented in this brochure may be part of a series, as an option, or it may not be available, depending on the versions. Manitou reserves the right, at any time and without notice, to amend the specifications described and represented. The specifications provided do not bind the manufacturer. For more details, please contact your Manitou agent. This is not a contractually binding document. The presentation of the products is not contractually binding. List of specifications non-exhaustive. The logos as well as the visual identity of the company are owned by Manitou and cannot be used without authorisation. All rights reserved. The photos and diagrams contained in this brochure are only provided for consultation and information purposes.

MANITOU BF SA - Limited company with board of directors - Share capital: 39,668,399 euros - 857 802 508 RCS Nantes