Technical sheet:

220 TJ-XP






Z2O TJ-XP Created on December 1		led on December 15, 2025 at 5.44 AM UT
Capacities		Metric
Working height	h21	21.74 m
Platform height	h7	19.74 m
Maximum outreach		17.79 m
Pendular arm rotation (top / bottom)		+70 ° / -63 °
Platform capacity	Q	350 kg
Turret rotation		360 °
Platform rotation (right / left)		90 ° / 90 °
Number of people (indoor / outdoor)		3 / 3
Weight and dimensions		
Platform weight*		13600 kg
Platform dimensions (length x width)	lp / ep	2.30 m x 0.90 m
Floor height (access)	h20	0.39 m
Overall length	I1	10.05 m
Overall width	b1	2.48 m
Overall height	h17	2.52 m
Overall length (stowed)	19	7.35 m
Overall height (stowed)	h18 ***	3.03 m
Jib length	l13	2 m
Counterweight Oversize / Reach		1.34 m
External turning radius	Wa3	4.40 m
Ground clearance at centre of wheelbase	m2	0.44 m
Wheelbase	V	2.80 m
Performances	,	2.00
Drive speed - stowed		5.40 km/h
Drive speed - raised		1 km/h
Gradeability		40 %
Permissible leveling		4 °
Wheels		
Tires type		Solid tires
Drive wheels (front / rear)		2 / 2
Steering wheels (front / rear)		2 / 2
Braking wheels (front / rear)		2/2
Engine/Battery		_,_
Engine brand / model		Kubota - V1505.E3B
Engine norm		Stage IIIA
Engine power (Hp / kW)		35 Hp / 26.20 kW
Miscellaneous		
Ground Pressure		18.30 dan/cm2
Hydraulic Pressure		400 bar
Hydraulic tank capacity		94
Fuel		72
Noise to environment (LwA)		107 dB
Vibration on hands/arms		0.50 m/s²
Daily consumption **		7.981
Standards compliance		7.501
		European directives: 2006/42/EC- Machinery
This machine is in compliance with:		(revised EN280:2013) - 2004/108/EC (EMC)

^{*}Varies according to options and standards of the country to which the machine is delivered ** According to "REDUCE cycle" $\,$


220 TJ-XP - Load chart


Load Chart for MEWP Metric

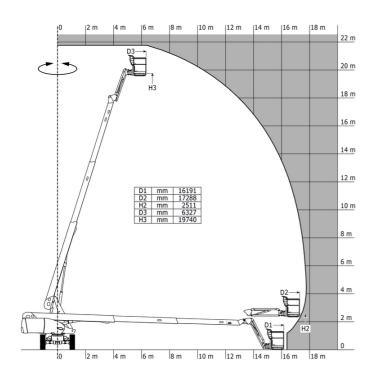

220 TJ-XP - Dimensional drawing







Equipment

230V Predisposition

4 simultaneous movements

4 wheel steer with crab mode

Audible alarm and illuminated indicator lamp (leveling, overload, lowering)

Backup electrical pump

Continuous turret rotation

Differential locking on rear axle

Electronic platform compensation

Emergency stop button in platform and on frame

Engine mounted on sliding platform

Fuel gauge with low level indicator

Integrated diagnostic assistance

Oscillating front axle

Painted basket for heavy loads 2,300 mm (7ft 7 in.)

Protective cover for control panel

Remote control for transport

Optional

110 or 230V plug with differential circuit breaker

Additional storage boxes

Basket 1,800 mm

Battery cut-off

Biodegradable oil

Catalytic cleaner

Cold weather protection oil

Engine compartment with key lock

Key lock on fuel tank

On-board generator (3,5 or 5 kW)

Panel support kit

SMS : Safe Man System

Safety harness

Screen protection on the lower box control

Spark arrester

Special color paints

Tube support kit

Water predisposition

Working light





Head Office

B.P. 249 - 430 rue de l'Aubinière 44150 Ancenis Cedex - France Tel: +33 (0)2 40 09 10 11 - Fax: +33 (0)2 40 09 10 97 www.manitou.com



This publication provides a description of the configuration versions and options for Manitou products, which may differ for equipment. The equipment presented in this brochure may be part of a series, as an option, or it may not be available, depending on the versions. Manitou reserves the right, at any time and without notice, to amend the specifications described and represented. The specifications provided do not bind the manufacturer. For more details, please contact your Manitou agent. This is not a contractually binding document. The presentation of the products is not contractually binding. List of specifications non-exhaustive. The logos as well as the visual identity of the company are owned by Manitou and cannot be used without authorisation. All rights reserved. The photos and diagrams contained in this brochure are only provided for consultation and information purposes.

MANITOU BF SA - Limited company with board of directors - Share capital: 39,668,399 euros - 857 802 508 RCS Nantes