Technical sheet:


MXT 840 P






	MXT 840 P Created on November 5, 2025 at 9:18 AN
Capacities	Metric
Max. capacity	4000 kg
Max. lifting height	7.60 m
Maximum outreach	4.23 m
Weight and dimensions	7.20 111
Overall length to carriage	l11 4.67 m
Length to face of forks	12 4.85 m
Overall width	b1 2.38 m
Overall height	h17 2.59 m
Wheelbase	
Ground clearance	y 2.58 m m4 380 mm
Overall cab width	b4 0.85 m
Tilt-up angle	a4 12 °
• •	
Tilt-down angle	a5 134 °
External turning radius (over tyres)	Wa1 3.90 m
Unladen weight (with forks)	8260 kg
Overall weight	8140 kg
Tires type	Inflatable
Standard tires	BKT 16.0/70-20 14PR- EM936 SPL
Forks length / width / section	I / e / s 1200 mm x 125 mm x 50 mm
Performances	
Lifting	13 s
Lowering	9 s
Extension	9 s
Retraction	6.10 s
Crowd	4.30 s
Dump	3.20 s
Engine	
Engine brand	Perkins
Engine norm	Stage IIIA
Engine model	1104D-44T
Number of cylinders / Capacity of cylinders	4 - 4400 cm³
Engine power (Hp/kW)	94 Hp / 70 kW
Max. torque / Engine rotation	392 Nm @ 1400 rpm
Drawbar pull	7800 daN
Drawbar pull (Laden)	7800 daN
Transmission	
Transmission type	Torque converter
Number of gears (forward / reverse)	4 / 4
Max. travel speed	28 km/h
Max. travel speed (may vary according to applicable regulations)	28 km/h
Parking brake	Oil-Immersed Multi-Disc Braking front and rear
Service brake	Hydraulic rear & front
Hydraulics	Hydraulic lear & Holit
<u> </u>	Canada
Hydraulic pump type	Gear pump
Hydraulic flow / Pressure	86.40 l/min-250 bar
Tank capacities	-
Engine oil	11.50
Hydraulic oil	120 I
Hydraulic tank capacity	151
Fuel	78.50 l
Noise and vibration	
Noise at driving position (LpA)	92 dB
Noise to environment (LwA)	110 dB
Vibration on hands/arms	< 2.50 m/s ²
Miscellaneous	
Steering wheels (front / rear)	2/2
Drive wheels (front / rear)	2/2
Cab certification	Cabin ROPS - FOPS level 2
Controls	Monolever

MXT 840 P - Dimensional drawing

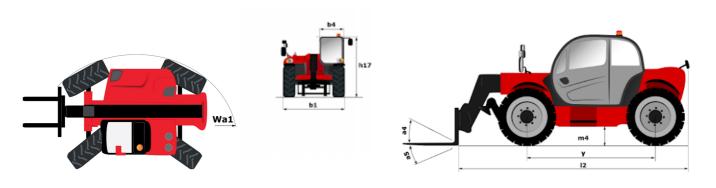

MXT 840 P - Load chart

Machine on tires with forks Metric

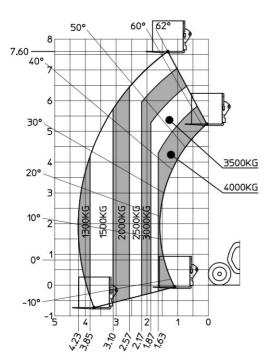





Head Office

B.P. 249 - 430 rue de l'Aubinière 44150 Ancenis Cedex - France Tel: +33 (0)2 40 09 10 11 - Fax: +33 (0)2 40 09 10 97 www.manitou.com



This publication provides a description of the configuration versions and options for Manitou products, which may differ for equipment. The equipment presented in this brochure may be part of a series, as an option, or it may not be available, depending on the versions. Manitou reserves the right, at any time and without notice, to amend the specifications described and represented. The specifications provided do not bind the manufacturer. For more details, please contact your Manitou agent. This is not a contractually binding document. The presentation of the products is not contractually binding. List of specifications non-exhaustive. The logos as well as the visual identity of the company are owned by Manitou and cannot be used without authorisation. All rights reserved. The photos and diagrams contained in this brochure are only provided for consultation and information purposes.

MANITOU BF SA - Limited company with board of directors - Share capital: 39,668,399 euros - 857 802 508 RCS Nantes