Technical sheet:


# **MXT 840 P**






	<b>MXT 840 P</b> Created on December 14, 2025 at 4:23	PM U
Capacities	Metric	
Max. capacity	4000 kg	
Max. lifting height	7.60 m	
Maximum outreach	4.23 m	
Weight and dimensions	4.20 111	
Overall length to carriage	l11 4.67 m	
Length to face of forks	12 4.85 m	
Overall width	b1 2.38 m	
Overall height	h17 2.59 m	
Wheelbase		
Ground clearance	y 2.58 m m4 380 mm	
Overall cab width	b4 0.85 m	
Tilt-up angle		
Tilt-down angle	a5 134°	
External turning radius (over tyres)	Wa1 3.90 m	
Unladen weight (with forks)	8260 kg	
Overall weight	8140 kg	
Tires type	Inflatable	
Standard tires	BKT 16.0/70-20 14PR- EM936 SPL	
Forks length / width / section	I / e / s 1200 mm x 125 mm x 50 mm	
Performances		
Lifting	13 s	
Lowering	9 s	
Extension	9 s	
Retraction	6.10 s	
Crowd	4.30 s	
Dump	3.20 s	
Engine		
Engine brand	Perkins	
Engine norm	Stage IIIA	
Engine model	1104D-44T	
Number of cylinders / Capacity of cylinders	4 - 4400 cm <sup>3</sup>	
Engine power (Hp/kW)	94 Hp / 70 kW	
Max. torque / Engine rotation	392 Nm @ 1400 rpm	
Drawbar pull	7800 daN	
Drawbar pull (Laden)	7800 daN	
Transmission		
Transmission type	Torque converter	
Number of gears (forward / reverse)	4/4	
Max. travel speed	28 km/h	
Max. travel speed (may vary according to applicable regulations)	28 km/h	
Parking brake	Oil-Immersed Multi-Disc Braking front and	rear Avl
Service brake	Hydraulic rear & front	icui / ixi
Hydraulics	Trydiadilo fedi a ffort	
Hydraulic pump type	Gear pump	
Hydraulic flow / Pressure	86.40 l/min-250 bar	
Tank capacities	80:40 I/IIIII1-230 Dai	
	11.50 l	
Engine oil		
Hydraulic oil	120	
Hydraulic tank capacity	151	
Fuel	78.50 l	
Noise and vibration		
Noise at driving position (LpA)	92 dB	
Noise to environment (LwA)	110 dB	
Vibration on hands/arms	2.50 m/s²	
Miscellaneous		
Steering wheels (front / rear)	2/2	
Drive wheels (front / rear)	2/2	
Cab certification	Cabin ROPS - FOPS level 2	
Controls	Monolever	

## MXT 840 P - Dimensional drawing

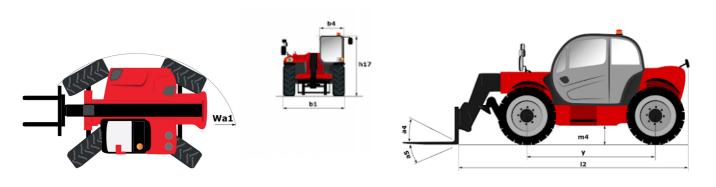

### MXT 840 P - Load chart

### Machine on tires with forks Metric

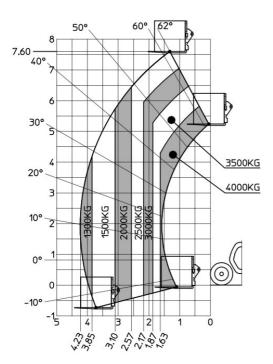





#### **Head Office**

B.P. 249 - 430 rue de l'Aubinière 44150 Ancenis Cedex - France Tel: +33 (0)2 40 09 10 11 - Fax: +33 (0)2 40 09 10 97 www.manitou.com



This publication provides a description of the configuration versions and options for Manitou products, which may differ for equipment. The equipment presented in this brochure may be part of a series, as an option, or it may not be available, depending on the versions. Manitou reserves the right, at any time and without notice, to amend the specifications described and represented. The specifications provided do not bind the manufacturer. For more details, please contact your Manitou agent. This is not a contractually binding document. The presentation of the products is not contractually binding. List of specifications non-exhaustive. The logos as well as the visual identity of the company are owned by Manitou and cannot be used without authorisation. All rights reserved. The photos and diagrams contained in this brochure are only provided for consultation and information purposes.

MANITOU BF SA - Limited company with board of directors - Share capital: 39,668,399 euros - 857 802 508 RCS Nantes