

Ficha técnica :


# 1850RT



 **MANITOU**  
HANDLING YOUR WORLD

| Capacities                                |     | Métrico                                        |
|-------------------------------------------|-----|------------------------------------------------|
| Max. capacity                             | Q   | 2398 kg                                        |
| Operating Weight                          |     | 4128 kg                                        |
| Unladen weight                            |     | 4128 kg                                        |
| Operating Capacity at 35% Tipping Load    |     | 839 kg                                         |
| Operating Capacity At 50% Tipping Load    |     | 1199 kg                                        |
| Tipping capacity                          |     | 2398 kg                                        |
| Weight and dimensions                     |     |                                                |
| Overall Operating Height - Fully Raised   | h27 | 4267 mm                                        |
| Height to Hinge Pin – Fully Raised        | h28 | 3251 mm                                        |
| Dump reach - Full height                  | r6  | 876 mm                                         |
| Dump angle at full height                 | a5  | 40.20 °                                        |
| Dump Height - Fully Raised                | h29 | 2489 mm                                        |
| Maximum Rollback Angle - Fully Raised     | a4  | 102.50 °                                       |
| Overall Height to top of ROPS             | h17 | 2103 mm                                        |
| Overall length with bucket                | l16 | 3754 mm                                        |
| Overall Length without Bucket             | l1  | 2921 mm                                        |
| Specified Height                          | h31 | 1715 mm                                        |
| Reach at Specified Height                 | r4  | 790 mm                                         |
| Dump angle at specified height            | a17 | 66.80 °                                        |
| Maximum Rollback Angle at Ground          | a13 | 30 °                                           |
| Carry Position                            | d5  | 208 mm                                         |
| Maximum Rollback Angle at Carry Position  | a14 | 31.60 °                                        |
| Digging Position                          | h32 | 23 mm                                          |
| Angle of Departure with STD Counterweight |     | 30.40 °                                        |
| Ground clearance                          | m4  | 318 mm                                         |
| Track gauge                               | b10 | 1313 mm                                        |
| Track Shoe Width                          | b20 | 320 mm                                         |
| Crawler base                              | y2  | 1392 mm                                        |
| Overall width less bucket                 | b1  | 1636 mm                                        |
| Bucket Width                              | e1  | 1674 mm                                        |
| Clearance Radius - Front with Bucket      | b18 | 2322 mm                                        |
| Clearance Circle - Rear                   | wa1 | 1666 mm                                        |
| Maximum rollback at specified height      |     | 66.80 °                                        |
| Angle of Approach                         | a3  | 90 °                                           |
| Grouser Height                            |     | 25 mm                                          |
| Track Type / Track Rollers / Roller Type  |     | Rubber / 4 / Steel                             |
| Performances                              |     |                                                |
| Ground Speed - Single Speed               |     | 9.50 km/h                                      |
| Ground Speed - Two Speed                  |     | 14.20 km/h                                     |
| Drawbar Pull/Traction Effort              |     | 4635 kg                                        |
| Bucket Breakout - Tilt Cylinder           |     | 2429 kg                                        |
| Bucket Breakout - Lift Cylinder           |     | 2275 kg                                        |
| Engine                                    |     |                                                |
| Engine brand                              |     | Yanmar                                         |
| Engine model                              |     | 4TNV98C-NMSL                                   |
| Motor Type                                |     | Axial Piston with Planetary Gear Box Reduction |
| Gross Power / Power                       |     | 51.70 kW @ 2500 rpm                            |
| Net Power / Power                         |     | 51 kW / 2500 rpm                               |
| Max. torque                               |     | 241 Nm                                         |
| I.C. Engine power rating                  |     | 69.30 Hp                                       |
| Battery voltage                           |     | 12 V                                           |
| Cold Cranking Amps at Temperature (CCA)   |     | 850 A                                          |
| Alternator - Voltage / Ampere             |     | 14 V / 100 A                                   |
| Tank capacities                           |     |                                                |
| Oil Pan Capacity                          |     | 10.40 l                                        |
| Hydraulic oil tank capacity               |     | 41.60 l                                        |
| Fuel tank                                 |     | 91 l                                           |
| Coolant system capacity                   |     | 13.30 l                                        |
| Displacement / Number of cylinders        |     | 3.30 l / 4                                     |
| Miscellaneous                             |     |                                                |
| Ground Pressure                           |     | 0.43 bar                                       |

1850RT - Diagrama dimensional

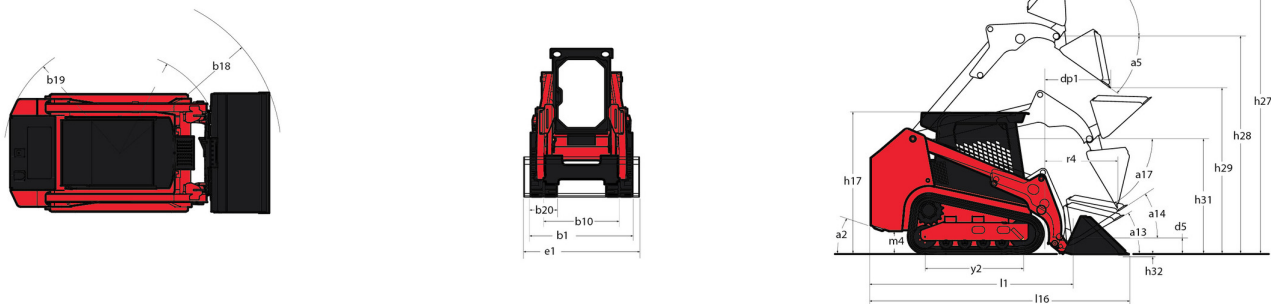

Equipamiento

|                                                  |          |
|--------------------------------------------------|----------|
| Lifting function                                 |          |
| All-Tach® Attachment Mounting System             | Estándar |
| Auxiliary Hydraulics                             | Estándar |
| Electronic Attachment Control - 14-Pin Connector | Opcional |
| High-Flow Auxiliary Hydraulics                   | Opcional |
| IdealTrax™ Automatic Track Tensioning System     | Estándar |
| Power-A-Tach® Attachment Mounting System         | Opcional |
| Motorization/Power                               |          |
| Combination Radiator & Hydraulic Oil Cooler      | Estándar |
| Dual-Element Air Cleaner with Indicator          | Estándar |
| Engine Auto-Shutdown System                      | Estándar |
| Glowplugs Starts Assist                          | Estándar |
| Two-Speed Hydrostatic Drive System               | Estándar |
| Operator station                                 |          |
| Air suspension seat                              | Opcional |
| Foot Throttle                                    | Estándar |
| Full-Suspension Seat                             | Estándar |
| IdealAccess™ Fold-Up Door                        | Opcional |
| Multi-Function Display Screen                    | Estándar |
| Pressurized Cab Enclosure with A/C               | Opcional |
| Rearview Camera                                  | Estándar |
| ROPS/FOPS Level II Overhead Guard                | Estándar |
| Sliding Side Windows                             | Estándar |
| Swing-out Cab Door                               | Estándar |
| Other options                                    |          |
| Selectable Self-Leveling Hydraulic Lift Action 4 | Opcional |
| Pneumatics                                       |          |
| Rubber Track Undercarriage System                | Estándar |
| Single Flange Front/Dual Flange Rear Idlers      | Estándar |
| Secondary functions                              |          |
| Counterweight                                    | Estándar |
| Dedicated Undercarriage                          | Estándar |
| Security                                         |          |
| Anti-Vandalism Lock Provisions                   | Estándar |
| Back-Up Alarm                                    | Estándar |
| Easy Manager                                     | Estándar |
| Engine Alert System with Error Display           | Estándar |
| Mechanical Lift Cylinder Lock                    | Estándar |
| Tilt-out Foot Pod                                | Estándar |



**Oficina Central**

B.P. 249 - 430 rue de l'Aubinière

44150 Ancenis Cedex - Francia

Tel.: 00 33 (0)2 40 09 10 11 - Fax: 00 33 (0)2 40 09 10 97

[www.manitou.com](http://www.manitou.com)



Esta publicación describe las versiones y posibilidades de configuración de los productos Manitou que puedan diferir en equipamiento. Los equipamientos presentados en este folleto pueden ser de serie, opcionales o no estar disponibles en algunas versiones. Manitou se reserva el derecho, en cualquier momento y sin previo aviso, de modificar las especificaciones descritas y representadas. Las especificaciones aportadas no comprometen al fabricante. Para más información, póngase en contacto con su concesionario Manitou. Documento no contractual. Presentación de los productos no contractual. Lista de especificaciones no exhaustiva. Los logos y la identidad visual de la empresa son propiedad de Manitou y no pueden ser utilizados sin autorización. Todos los derechos reservados. Las fotos y los esquemas contenidos en este folleto se ofrecen para consulta y a título indicativo solamente.

Manitou BF SA - Sociedad anónima con Consejo de Administración - Capital social: 39 668 399 euros - 857 802 508 RCS Nantes