

Technical sheet :



2150RT



 **MANITOU**
HANDLING YOUR WORLD

Capacities		Imperial
Max. capacity	Q	6144 lb
Operating Weight		9901 lb
Unladen weight		9901 lb
Operating Capacity at 35% Tipping Load		2150 lb
Operating Capacity At 50% Tipping Load		3071 lb
Tipping capacity		6144 lb
Weight and dimensions		
Overall Operating Height - Fully Raised	h27	168 in
Height to Hinge Pin - Fully Raised	h28	128 in
Dump reach - Full height	r6	34 in
Dump angle at full height	a5	39 °
Dump Height - Fully Raised	h29	98 in
Maximum Rollback Angle - Fully Raised	a4	102.50 °
Overall Height to top of ROPS	h17	83 in
Overall length with bucket	l16	148 in
Departure angle	a2	29.20 °
Overall Length without Bucket	l1	116 in
Specified Height	h31	68 in
Reach at Specified Height	r4	31 in
Dump angle at specified height	a17	75 °
Carry Position	d5	8 in
Maximum Rollback Angle at Carry Position	a14	31.60 °
Digging Position	h32	0.63 in
Angle of Departure with STD Counterweight		29.20 °
Ground clearance	m4	13 in
Track gauge	b10	52 in
Track Shoe Width	b20	18 in
Crawler base	y2	58 in
Overall width less bucket	b1	69 in
Bucket Width	e1	74 in
Clearance Radius - Front with Bucket	b18	95 in
Angle of Approach	a3	90 °
Grouser Height		0.98 in
Track Type / Track Rollers / Roller Type		Rubber / 5 / Steel
Performances		
Ground Speed - Single Speed		6 mph
Ground Speed - Two Speed		9 mph
Drawbar Pull/Tractive Effort		12132 lb
Bucket Breakout - Tilt Cylinder		6632 lb
Bucket Breakout - Lift Cylinder		6482 lb
Engine		
Engine brand		Yanmar
Engine model		TNV98CT-NMSL
Motor Type		Axial Piston with Planetary Gear Box Reduction
Engine power (Hp)		72 Hp
Engine power (kW)		52.70 kW
Max. torque		217 ft/lbs
Battery voltage		12 V
Cold Cranking Amps at Temperature (CCA)		850 A
Alternator - Voltage / Ampere		14 V / 100 A
Hydraulics		
Standard flow - Auxiliary hydraulics		22 US gpm
Tank capacities		
Oil Pan Capacity		3 US gal
Hydraulic tank capacity		14 US gal
Fuel		24 US gal
Cooling liquid		4 US gal
Displacement / Number of cylinders		0.87 US gal / 4
Noise and vibration		
Noise to environment (LwA)		103 dB
Noise at driving position (LpA)		83 dB
Miscellaneous		
Ground Pressure		5 PSI

2150RT - Dimensional drawing

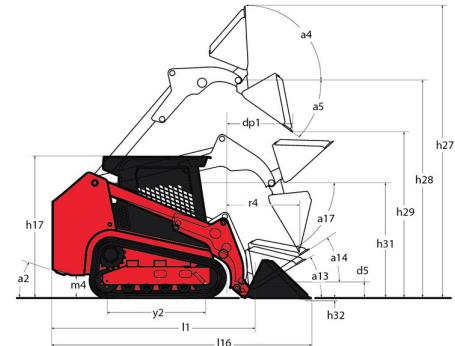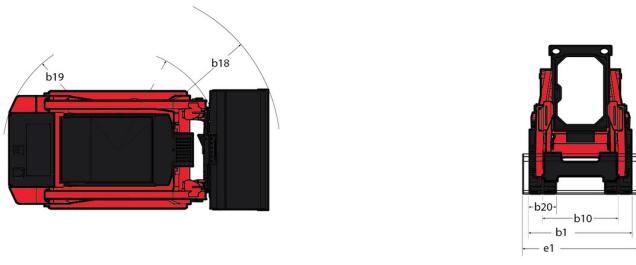

Equipment

Lifting function		
All-Tach® Attachment Mounting System		Standard
Auxiliary Hydraulics		Standard
Electronic Attachment Control - 14-Pin Connector		Optional
High-Flow Auxiliary Hydraulics		Optional
IdealTrax® automatic track tensioning system		Standard
Power-A-Tach® Attachment Mounting System		Optional
Motorization/Power		
Combination Radiator & Hydraulic Oil Cooler		Standard
Dual-Element Air Cleaner with Indicator		Standard
Engine Auto-Shutdown System		Standard
Glowplugs Starts Assist		Standard
Two-Speed Hydrostatic Drive System		Standard
Operator station		
Air suspension seat		Optional
Foot Throttle		Standard
Full-Suspension Seat		Standard
IdealAccess™ Fold-Up Door		Optional
Multi-Function Display Screen		Standard
Pressurized Cab Enclosure with A/C		Optional
Rearview Camera		Standard
ROPS/FOPS Level II Overhead Guard		Standard
Sliding Side Windows		Standard
Swing-out Cab Door		Standard
Other options		
Selectable Self-Leveling Hydraulic Lift Action 4		Optional
Pneumatics		
Rubber Track Undercarriage System		Standard
Single Flange Front/Dual Flange Rear Idlers		Standard
Secondary functions		
Counterweight		Standard
Dedicated Undercarriage		Standard
Security		
Anti-Vandalism Lock Provisions		Standard
Back-Up Alarm		Standard
Easy Manager		Standard
Engine Alert System with Error Display		Standard
Mechanical Lift Cylinder Lock		Standard
Tilt-out Foot Pod		Standard



MANITOU HANDLING YOUR WORLD

Head Office

B.P. 249 - 430 rue de l'Aubinière
44150 Ancenis Cedex - France
Tel: +33 (0)2 40 09 10 11 - Fax: +33 (0)2 40 09 10 97
www.manitou.com



This publication provides a description of the configuration versions and options for Manitou products, which may differ for equipment. The equipment presented in this brochure may be part of a series, as an option, or it may not be available, depending on the versions. Manitou reserves the right, at any time and without notice, to amend the specifications described and represented. The specifications provided do not bind the manufacturer. For more details, please contact your Manitou agent. This is not a contractually binding document. The presentation of the products is not contractually binding. List of specifications non-exhaustive. The logos as well as the visual identity of the company are owned by Manitou and cannot be used without authorisation. All rights reserved. The photos and diagrams contained in this brochure are only provided for consultation and information purposes.

MANITOU BF SA - Limited company with board of directors - Share capital: 39,668,399 euros - 857 802 508 RCS Nantes