

Technical sheet :

MLT 420-60 H




 **MANITOU**
HANDLING YOUR WORLD

| Capacities | | Imperial |
|--|-----|---|
| Max. capacity | Q | 4409 lb |
| Max. lifting height | h3 | 14 ft 3 in |
| Maximum outreach | | 8 ft 8 in |
| Reach at max. height | | 3 ft 3 in |
| Breakout force with bucket | | 1886 daN |
| Weight and dimensions | | |
| Unladen weight (with forks) | | 9237 lb |
| Ground clearance | m4 | 10 in |
| Wheelbase | y | 7 ft |
| Overall length to carriage (with hitch) | l11 | 11 ft 11 in |
| Overall length to carriage (without hitch) | l3 | 11 ft 11 in |
| Front overhang | | 3 ft 5 in |
| Overall width | b1 | 4 ft 11 in |
| Overall cab width | b4 | 2 ft 7 in |
| Overall height | h17 | 6 ft 5 in |
| Tilt-down angle | a5 | 116 ° |
| Tilt-up angle | a4 | 12 ° |
| External turning radius (over tyres) | Wa1 | 10 ft |
| Standard tires | | CAMSO - SKS532 - 12-16.5 145A2 |
| Drive wheels (front / rear) | | 2 / 2 |
| Steering wheels (front / rear) | | 2 / 2 |
| Performances | | |
| Lifting | | 5 s |
| Lowering | | 3.50 s |
| Extension | | 4.80 s |
| Retraction | | 3 s |
| Crowd | | 3.30 s |
| Dump | | 2.70 s |
| Engine | | |
| Engine brand | | Kubota |
| Engine norm | | Stage V |
| Engine model | | V2607-CR-E5B |
| Number of cylinders - Capacity of cylinders | | 4 - 160 in³ |
| I.C. Engine power rating / Power | | 57 Hp / 42 kW |
| Max. torque / Engine rotation | | 128 ft/lbs @1600 rpm |
| Drawbar pull (Laden) | | 2850 daN |
| Reversible fan | | Standard |
| Engine cooling system | | 2 radiators water + hydraulic oil |
| Transmission | | |
| Transmission type | | Hydrostatic |
| Number of gears (forward / reverse) | | 2 / 2 |
| Max. travel speed (may vary according to applicable regulations) | | 16 mph |
| Differential lock | | Limited slip differential on front axle |
| Parking brake | | Automatic negative parking brake |
| Hydraulics | | |
| Hydraulic pump type | | Gear pump |
| Hydraulic flow - Pressure | | 20 US gpm - 3408 PSI |
| Tank capacities | | |
| Hydraulic tank capacity | | 18 US gal |
| Fuel tank | | 16 US gal |
| Noise and vibration | | |
| Noise at driving position (LpA) tested following NF EN 12053 nom | | 76 dB |
| Noise to environment (LWA) | | 104 dB |
| Vibration on hands/arms | | < 2.50 m/s² |
| Miscellaneous | | |
| Tractor homologation | | |
| Cab certification | | ROPS - FOPS cab (level 1) |
| Controls | | JSM |

Optional tires tab


| | Overall height | Overall width |
|--------------------------------------|----------------|---------------|
| ALLIANCE - A550 - 305/70 R16.5 141A5 | 6 ft 5 in | 4 ft 10 in |
| TRELLEBORG - TH400 - 11LR16 130A8 | 6 ft 6 in | 4 ft 11 in |

MLT 420-60 H - Dimensional drawing

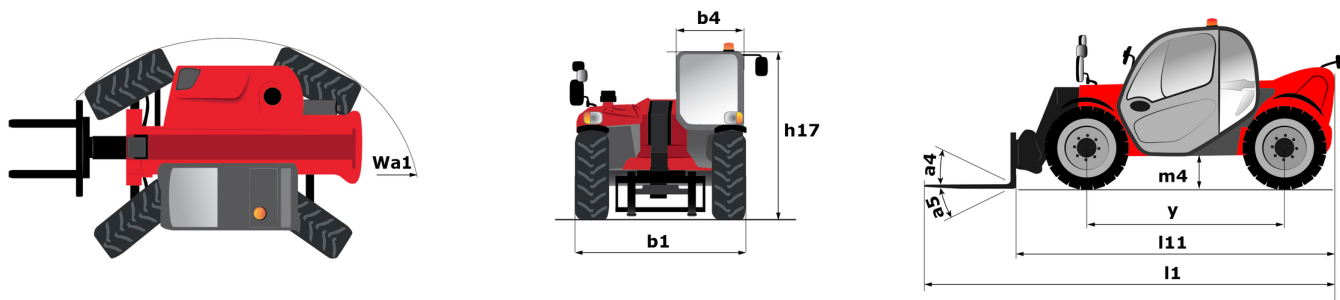

MLT 420-60 H - Load chart

Machine on tires with forks Imperial

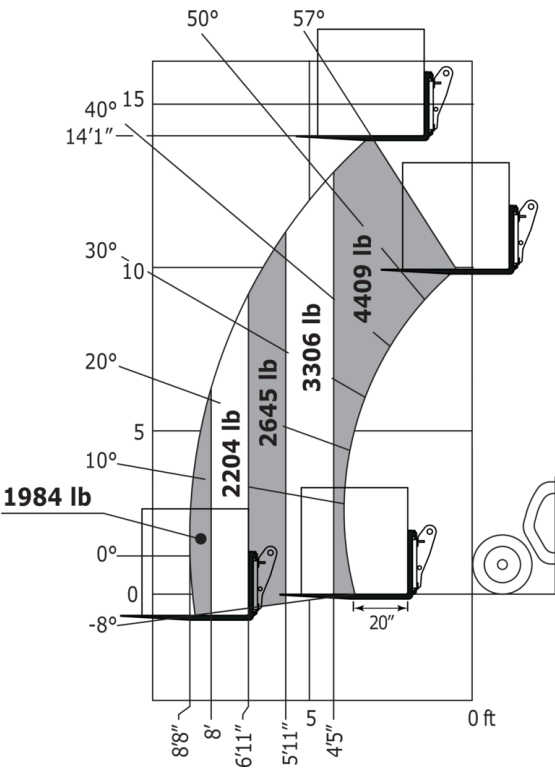



Head Office

B.P. 249 - 430 rue de l'Aubinière

44150 Ancenis Cedex - France

Tel: +33 (0)2 40 09 10 11 - Fax: +33 (0)2 40 09 10 97

www.manitou.com



This publication provides a description of the configuration versions and options for Manitou products, which may differ for equipment. The equipment presented in this brochure may be part of a series, as an option, or it may not be available, depending on the versions. Manitou reserves the right, at any time and without notice, to amend the specifications described and represented. The specifications provided do not bind the manufacturer. For more details, please contact your Manitou agent. This is not a contractually binding document. The presentation of the products is not contractually binding. List of specifications non-exhaustive. The logos as well as the visual identity of the company are owned by Manitou and cannot be used without authorisation. All rights reserved. The photos and diagrams contained in this brochure are only provided for consultation and information purposes.

MANITOU BF SA - Limited company with board of directors - Share capital: 39,668,399 euros - 857 802 508 RCS Nantes